



**LOS PRODUCTOS DE ALDO**

# VIDRIO ESMERILADO



Consultas  
por SMS y  
WhatsApp  
639 76 71 54

**LOS PRODUCTOS DE ALDO S.L.U.**

POL. INDUSTRIAL EL GUIJAR - C/ABEDUL Nº 14 - 28500 ARGANDA DEL REY - MADRID-SPAIN

Nuevo E-mail: [jmadhanssell@gmail.com](mailto:jmadhanssell@gmail.com) Nuevo FAX: 91 039 01 86

Consultas por WhatsApp 639 76 71 54 INFORMACION COMERCIAL 91 876 73 43 - 639 76 71 54

# Tradition and Modern Technology

## Ahead of Times out of Tradition

With 70 years company tradition and our advanced know-how we are today a leading manufacturer of laboratory glass instruments with customers and interests worldwide. Our laboratory glass instruments can be found in countless chemical and scientific laboratories.

Product quality without compromises, innovative solutions and perfect service - they are the pillars of our success.

We strive to offer our clients, suppliers and distribution partners

these services on a reliable basis and highest standard.

More than 100 qualified specialists continuously work on the development and improvement of the proven quality of Lenz laboratory glass instruments.

We feel obligated to the progress of modern technology and the growing demands of our clients.

Today and in the future.

## Function und Precision

The production of our laboratory glass instruments is determined by modern process-technology. Half and fully-automatic micro-processor-controlled glass-processing machines, particularly supported by robotics, guarantee a continuous economical production.

But despite our advanced technology: In order to secure highest demands on function and precision, Lenz laboratory glass instruments receive the finishing touch by hand.



Manufacturing of large voluminous instruments



Assignment-orientated production of small series



Glass-blowing machines



Automatic hot processing

### Integral Quality Philosophy

From the development to the manufacturing of our laboratory glass instruments, quality is our goal.

We test each and every manufacturing step by means of an extensive quality management system, based on DIN ISO 9001 / EN 29001. This guarantees high quality from the development to the delivery. We are not only committed to the quality of our products, but also to that of our environment. As an example, we are automatically reprocessing our grinding waste water by means of a microprocessor-controlled distillation and lead it back in the production cycle.


### Individual Solutions

Staying true to our self-image as a service-enterprise for chemistry and science, we offer our clients a global service. Our high-quality glass blowers make products made to measure:

Pretentious special preparations and small production series, high precision application- and melting-processes, and manufacturing of large capacity glass instruments.

### Innovative Product Diversity


With more than 10,000 products we offer an outstanding range of glass instruments. The Lenz product range reaches from standard test tubes to high-tech distillation apparatus.

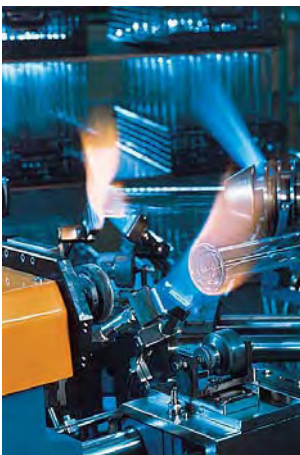


**Glass-forming machine with 8 processing stations**



**Grinding shop**

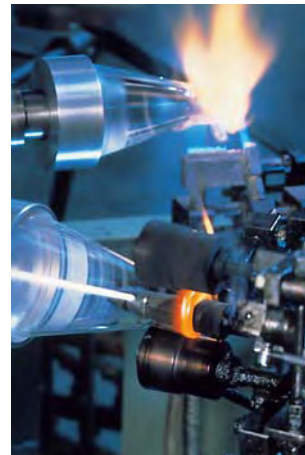

**Fully automatic glass-forming machine with 8 processing stations**

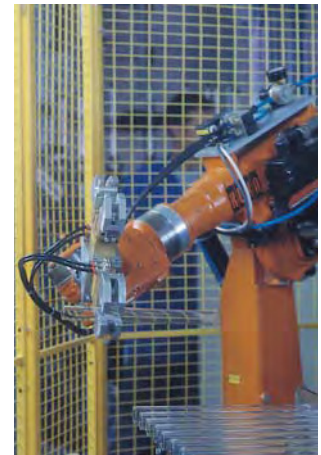

**Robotic processing**

# Lenz - The Specialist for Ground Joints

## The Ground Joint Instruments Range

With decades of experience, advanced technological know-how and the outstanding properties of DURAN® glass we guarantee the proven quality of our precision ground joints.

The Lenz ground joint instruments range includes conical joints, stopcocks, ground joint flasks, separating and dropping funnels as well as a large range of ground joint components.

## Quality with System

Lenz ground joint instruments are produced according to DIN 12242 / ISO 393.

Each production step is tested by a quality management system, based on DIN ISO 9001 / EN 29001. The test are examined by a cone measuring device for checking the taper, a surface roughness meter for testing the roughness parameters and a wall thickness measuring apparatus with a magnetic inductive measuring process to guarantee a homogenous concentricity and wall thickness.

A multiple-station unit serves for grinding, for pre- and post polishing of our ground joints.

An electro-mechanical scanner ensures constant quality. In cases of specific high demands on function and precision the grinding is processed by hand.



SQC - Statistical Quality Control



Circular grinding machines grind NS-cones half-automatically



Multiple-station unit for pre- and post-polishing of NS-sockets

**Lenz Ground Joint Instruments**

Lenz ground joint instruments are branded by:

- high taper accuracy of the cones
- precise concentricity
- small roughness of the surfaces

These properties guarantee

- excellent tightness
- minimized need for grease
- no bend out of line

**How to identify Lenz Ground Joint Instruments**


Lenz ground joint instruments are marked with the logo of our company and indicate the respective size of the ground joint.



**Conical Joints NS to DIN 12242 / ISO 383**

Size NS	Cone $\varnothing_1^*$ mm	Socket $\varnothing_2^*$ mm	Length mm
5/13	5	3.6	13
7/16	7.5	5.8	16
10/19	10	8	19
12/21	12.5	10.3	21
14/23	14.5	12.1	23
19/26	18.8	16.1	26
24/29	24	21	29
29/32	29.2	25.9	32
34/35	34.5	30.9	35
45/40	45	40.9	40
60/46	60	55.3	46
71/51	71	65.8	51
85/55	85	79.4	55

\* approximate measures

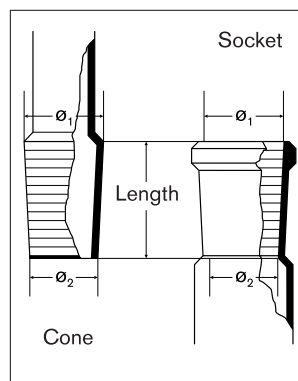

## **Important Information about the Catalog**

### **Figures**

The figures serve for illustration purposes. They do not necessarily have to agree with the described article in every detail.

### **Dimensions**

Dimensions given without exact tolerances are approximate figures. The actual test and measuring results may vary due to numerous factors beyond our control. For this reason, the user must carefully check the data when transferring it to particular application in question. Catalog numbers and technical specifications are subject to change without notice.

### **Packaging Units**

The packaging units correspond with the recommended order quantity. The minimum order quantities are indicated in the respective current price list.

### **Ordering Possibilities**

Our products can be purchased from mayor supply dealers. Should you have difficulties finding a dealer in your vicinity, please contact us.

### **Custom Made Products**

Beside our standard product range we manufacture special custom made products according to your individual demands. For further information, please contact us.

Copyright:


Any reproduction, including electronic copies, of the total or parts of this catalog, has to be expressly approved by LENZ Laborglas GmbH & Co.KG.

# Content

<p>Conical Ground Joints          Accessories for Ground Joints          Spherical Joints          Screw Connecting Adapters          Stoppers          Adapters          Tubing Connectors</p>	1			
<p>Stopcocks, Straight Bore          Stopcocks, Two-way          Stopcocks, Three-way          Vacuum- Stopcocks          Burette Stopcocks          Needle-valve Stopcocks</p>	2			
<p>Flasks, Single-neck          Flasks, Multit-neck</p>	3			
<p>Separating Funnels          Dropping Funnels</p>	4			
<p>Still Heads          Distilling Links          Gas Inlet Tubes          Adapters          Columns          Condensers          Delivery Adapters</p>	<p>Receiver Adapters          Distilling Receivers          Connectors          Funnels          Drying Tubes          Cold Traps          Extractors</p>	<p>Chromatographic Columns          Sprayer          Wash Bottles          Kipp Dispensers          Gas Washbottles          Analytical Apparatus          Water Jet Pumps</p>	<p>Centrifuge Tubes          Test Tubes          Water Stills</p>	5
<p>Reaction Vessels          Flat Flange Lids          Accessories for Reaction Vessels          Stirrer Bearings          Stirrer Guides          Stirrers</p>	6			
<p>Beakers          Flasks with Beaded Rim          Laboratory Bottles          Glass Filtration Instruments</p>	7			
<p>Informations about Filter Plates and Glass          Filtration Instruments          Technical Information about Laboratory Glass          DURAN®          Alphabetical Index          Number Index          Terms and Conditions</p>	8			





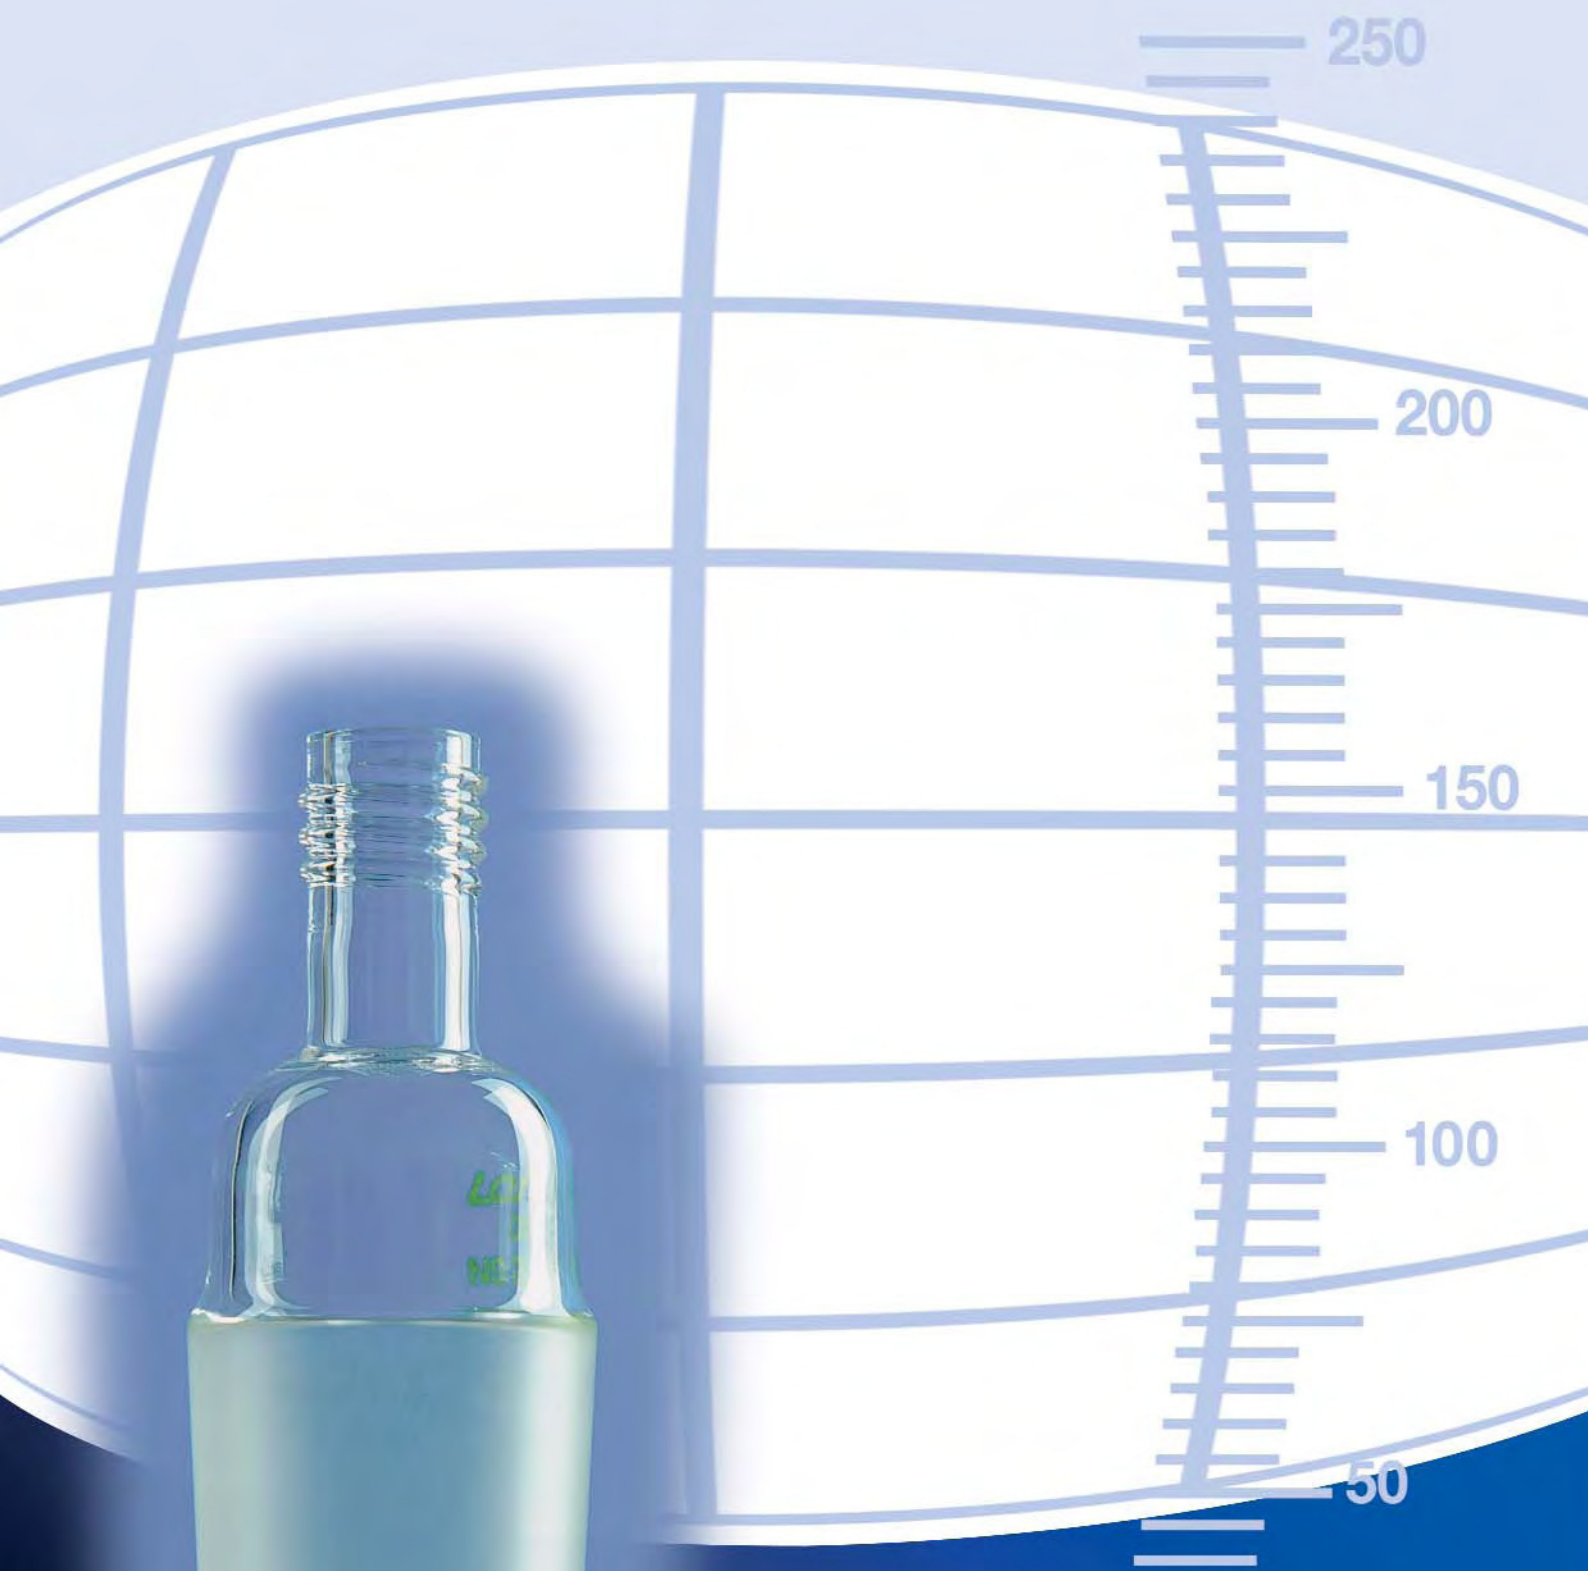

Conical Ground Joints

1



Cone



Cone with Cone Tip



Cone with Angle Tip



Cone with Short Tip

**Cones**

DURAN®. DIN 12242 Form B.

Precisely grinded conical ground cones.

Edges melted, ground rims bevelled.

Cone NS	Ø mm	Wall Th. mm	Total Length approx. mm	SP pcs.	Cat. No.
5/13	4	0,8	115	10	1.1002.05
7/16	6	1,5	115	10	1.1002.07
10/19	8	1,5	115	10	1.1002.10
12/21	11	1,5	120	10	1.1002.12
14/23	13	1,5	120	10	1.1002.14
19/26	17	1,8	120	10	1.1002.19
24/29	22	1,8	130	10	1.1002.24
29/32	26	2,0	130	10	1.1002.29
34/35	30	2,0	130	10	1.1002.34
40/38	36	2,0	140	10	1.1002.40
45/40	40	2,3	140	10	1.1002.45
50/42	46	2,3	140	1	1.1002.50
55/44	50	2,5	140	1	1.1002.55
60/46	54	2,5	150	1	1.1002.60
71/51	65	3,2	180	1	1.1002.71
85/55	80	3,5	180	1	1.1002.85

**Cones with Cone Tip**

DURAN®. DIN 12242 Form G.

Cone NS	Ø mm	Wall Th. mm	Total Length approx. mm	SP pcs.	Cat. No.
7/16	6	1,5	115	10	1.1003.07
10/19	8	1,5	115	10	1.1003.10
12/21	11	1,5	120	10	1.1003.12
14/23	13	1,5	120	10	1.1003.14
19/26	17	1,8	120	10	1.1003.19
24/29	22	1,8	130	10	1.1003.24
29/32	26	2,0	130	10	1.1003.29
34/35	30	2,0	130	10	1.1003.34
40/38	36	2,0	140	10	1.1003.40
45/40	40	2,3	140	10	1.1003.45
50/42	46	2,3	140	1	1.1003.50
55/44	50	2,5	140	1	1.1003.55
60/46	54	2,5	160	1	1.1003.60
71/51	65	3,2	180	1	1.1003.71
85/55	80	3,5	180	1	1.1003.85

**Cones with Angle Drip**

DURAN®. DIN 12242 Form F.

Cone NS	Ø mm	Wall Th. mm	Total Length approx. mm	SP pcs.	Cat. No.
14/23	13	1,5	120	10	1.1004.14
19/26	17	1,8	120	10	1.1004.19
24/29	22	1,8	130	10	1.1004.24
29/32	26	2,0	130	10	1.1004.29

**Cones with Short Tip**

DURAN®.

Cone NS	Ø mm	Wall Th. mm	Total Length approx. mm	SP pcs.	Cat. No.
14/23	13	1,5	120	10	1.1005.14
19/26	17	1,8	120	10	1.1005.19
24/29	22	1,8	130	10	1.1005.24
29/32	26	2,0	130	10	1.1005.29

Conical Ground Joints

Cones, Full Length					
DURAN®.					
Cone NS	Ø mm	Wall Th. mm	Total Length approx. mm	SP pcs.	Cat. No.
5/20	4	0,8	115	10	1.1007.05
7/25	6	1,5	115	10	1.1007.07
10/30	8	1,5	115	10	1.1007.10
12/32	11	1,5	120	10	1.1007.12
14/35	13	1,5	120	10	1.1007.14
19/38	17	1,8	120	10	1.1007.19
24/40	22	1,8	130	10	1.1007.24
29/42	26	2,0	130	10	1.1007.29
34/45	30	2,0	140	10	1.1007.34
45/50	40	2,3	150	10	1.1007.45



Cones, Full Length, with Cone Tip					
DURAN®.					
Cone NS	Ø mm	Wall Th. mm	Total Length approx. mm	SP pcs.	Cat. No.
14/35	13	1,5	120	10	1.1008.14
19/38	17	1,8	120	10	1.1008.19
24/40	22	1,8	130	10	1.1008.24
29/42	26	2,0	130	10	1.1008.29

Cones with Cone Tip and Special Tube Dimensions					
DURAN®.					
Cone NS	Ø mm	Wall Th. mm	Total Length approx. mm	SP pcs.	Cat. No.
29/32	40	2,3	300	1	1.1012.01
34/35	40	2,3	300	1	1.1012.02
45/40	40	2,3	300	1	1.1012.03
60/46	50	2,5	300	1	1.1012.04
71/51	50	2,5	350	1	1.1012.05



Conical Ground Joints

1

Sockets

DURAN®. DIN 12249 Form E

Precisely grinded conical ground sockets.

Edges melted, ground rims bevelled.

Socket NS	Ø mm	Wall Th. mm	Total Length approx. mm	SP pcs.	Cat. No.
5/13	8	1,5	115	10	1.1001.05
7/16	10	1,5	115	10	1.1001.07
10/19	13	1,5	115	10	1.1001.10
12/21	15	1,8	120	10	1.1001.12
14/23	17	1,8	120	10	1.1001.14
19/26	22	1,8	120	10	1.1001.19
24/29	28	2,0	130	10	1.1001.24
29/32	33	2,0	130	10	1.1001.29
34/35	40	2,3	130	10	1.1001.34
40/38	44	2,3	140	10	1.1001.40
45/40	50	2,5	140	10	1.1001.45
50/42	54	2,5	140	1	1.1001.50
55/44	60	2,2	140	1	1.1001.55
60/46	65	2,2	160	1	1.1001.60
71/51	75	3,2	180	1	1.1001.71
85/55	90	3,5	180	1	1.1001.85



Socket



Socket, Full Length



Socket with Special Tube Dimensions

Sockets, Full Length

DURAN®.

Socket NS	Ø mm	Wall Th. mm	Total Length approx. mm	SP pcs.	Cat. No.
5/20	8	1,5	115	10	1.1006.05
7/25	10	1,5	115	10	1.1006.07
10/30	13	1,5	115	10	1.1006.10
12/32	15	1,8	120	10	1.1006.12
14/35	17	1,8	120	10	1.1006.14
19/38	22	1,8	120	10	1.1006.19
24/40	28	2,0	130	10	1.1006.24
29/42	33	2,0	130	10	1.1006.29
34/45	40	2,3	140	10	1.1006.34
45/50	50	2,5	150	10	1.1006.45

Sockets with Special Tube Dimensions

DURAN®.

Socket NS	Ø mm	Wall Th. mm	Total Length approx. mm	SP pcs.	Cat. No.
14/23	16	1,2	160	1	1.1010.01
14/23	22	1,8	145	1	1.1010.02
29/32	32	2,0	210	1	1.1010.05
29/32	40	2,3	380	1	1.1010.07
45/40	48	2,3	280	1	1.1010.11



Tube with Socket and Cone

Tubes with Socket and Cone

DURAN®.

Socket NS	Cone NS	Ø mm	Wall Th. mm	Length mm	SP pcs.	Cat. No.
14/23	14/23	17	1,8	120	10	1.1014.11
14/23	29/32	26	2,0	130	10	1.1014.14
19/26	19/26	22	1,8	125	10	1.1014.22
29/32	29/32	33	2,0	150	10	1.1014.44

Accessories for Conical Ground Joints



Disposable Ground Joint Sleeves, PTFE



Ground Joint Sleeve with Grip Collar, PTFE

Disposable Ground Joint Sleeves, PTFE

Outstanding chemical resistance at operating temperatures from -200 to + 260 °C. Only 50 µm wall thickness. The sleeves fit like a second skin without adding bulk. Without protruding rim, simplifying use of joint clips.

for NS	SP pcs.	Cat. No.
14/23	10	1.1015.14
19/26	10	1.1015.19
24/29	10	1.1015.24
29/32	10	1.1015.29
45/40	10	1.1015.45

Ground Joint Sleeves with Grip Collar, PTFE

Outstanding chemical resistance at operating temperatures from -200 to + 260 °C. Sturdy design for permanent use. With grip collar and sealing rings for excellent tightness.

for NS	SP pcs.	Cat. No.
14/23	1	1.1017.14
19/26	1	1.1017.19
24/29	1	1.1017.24
29/32	1	1.1017.29
45/40	1	1.1017.45



Alu-Ring with Hooks



Spring

Alu-Rings with Hooks

For cones and sockets to be used with springs for the safe connection of conical ground joints. No breakage of glass hooks.

for NS	SP pcs.	Cat. No.
12-14	10	1.1025.14
19-24	10	1.1025.19
29-34	10	1.1025.29
45	10	1.1025.45

Springs

Stainless steel with 2 rings for the safe connection of conical ground joints in combination with Alu-rings with hooks.

Total Length mm	SP pcs.	Cat. No.
25	10	1.1028.25
35	10	1.1028.35
40	10	1.1028.40
60	10	1.1028.60
85	10	1.1028.85

Accessories for Conical Ground Joints



Fork Clamp for NS



Set Screw for NS Fork Clamps



Clip

Fork Clamps for NS

Cr-Ni steel. For ground joints.

Set screw must be ordered separately.

for NS	SP pcs.	Cat. No.
14/23	10	1.1035.14
19/26	10	1.1035.19
24/29	10	1.1035.24
29/32	10	1.1035.29
45/40	10	1.1035.45

Clips

Cr-Ni steel. For ground joints..

for NS	SP pcs.	Cat. No.
14/23	10	1.1032.14
19/26	10	1.1032.19
24/29	10	1.1032.24
29/32	10	1.1032.29
45/40	10	1.1032.45

Set Screws for NS Fork Clamps

Fits all sizes of NS fork clamps Art. 1.1035.14 ff.

for NS	SP pcs.	Cat. No.
14-45	10	1.1035.99



Conical Joint Clip Type „Keck“



Conical Joint Clip Type „Safety Clip“

Conical Joint Clips Type „Keck“

POM. Will not scratch glass surfaces. Excellent resiliance and stability. Outstanding chemical resistance. Operating temperature up to approx. 150 °C.

for NS	Color	SP pcs.	Cat. No.
10/19	turquoise	10	1.1037.10
12/21	violet	10	1.1037.12
14/23	yellow	10	1.1037.14
19/26	blue	10	1.1037.19
24/29	green	10	1.1037.24
29/32	red	10	1.1037.29
34/35	orange	10	1.1037.34
40/38	yellow	10	1.1037.40
45/40	brown	10	1.1037.45

Conical Joint Clips Type „Safety Clip“


POM. Will not scratch glass surfaces. Due to variable gear rods also for use with sleeves with grip collar. Outstanding chemical resistance. Operating temperature up to approx. 150 °C.

for NS	Color	SP pcs.	Cat. No.
10/19	blue	10	1.1038.10
12/21	blue	10	1.1038.12
14/23	blue	10	1.1038.14
19/26	blue	10	1.1038.19
24/29	blue	10	1.1038.24
29/32	blue	10	1.1038.29
34/35	blue	10	1.1038.34
40/38	blue	10	1.1038.40
45/40	blue	10	1.1038.45

## Spherical Joints

Our Spherical Joints are manufactured to Inch dimensions.  
The measures are in accordance with DIN 12244 and ISO 641.


Nominal Size	d <sub>1</sub> mm	d <sub>2</sub> mm	d <sub>3</sub> mm	d <sub>4</sub> mm
S13	12,700	12,706	12,50	12,5
S19	19,050	19,057	18,90	18,9
S29	28,575	28,582	28,35	28,3
S35	34,925	34,934	34,65	34,6
S40	38,100	38,109	37,80	37,7
S41	41,275	41,284	40,95	40,9
S51	50,800	50,810	49,40	49,3
S64	63,500	63,510	62,95	62,9

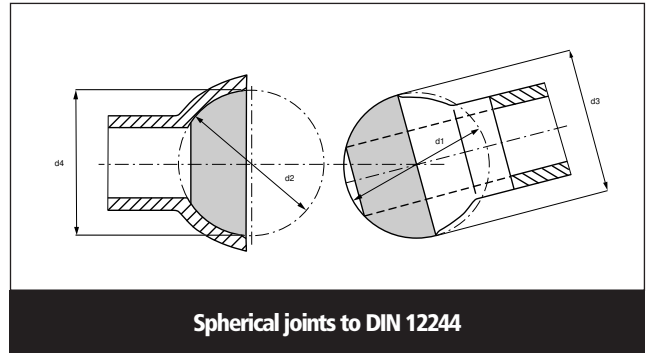

Socket Members, Inch Range			
DURAN®.			
Socket	Total Length approx. mm	SP pcs.	Cat. No.
S			
13/2	100	10	1.2013.02
13/5	100	10	1.2013.05
19	120	10	1.2019.09
29	120	10	1.2029.15
35	120	10	1.2035.20
40	120	1	1.2040.25
41	120	1	1.2041.25
51	150	1	1.2051.30
65	170	1	1.2065.40

Ball Members, Inch Range			
DURAN®.			
Ball	Total Length approx. mm	SP pcs.	Cat. No.
S			
13/2	100	10	1.2113.02
13/5	100	10	1.2113.05
19	120	10	1.2119.09
29	120	10	1.2129.15
35	120	10	1.2135.20
40	120	1	1.2140.25
41	120	1	1.2141.25
51	150	1	1.2151.30
65	170	1	1.2165.40

Fork Clamps for Spherical Joints		
Stainless steel. Clips for spherical joints, with set screw.		
for	SP pcs.	Cat. No.
S		
13	1	1.2313.02
19	1	1.2319.09
29	1	1.2329.15
35	1	1.2335.20
40/41	1	1.2341.25
51	1	1.2351.30
65	1	1.2365.40

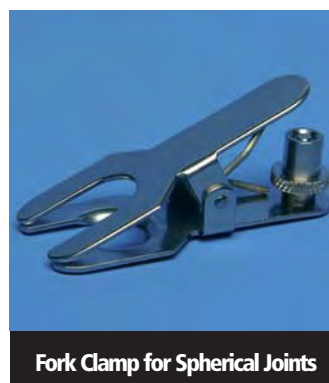

Screw Connecting Adapters



Screwthread Tube for Glassblowers

**Screwthread Tubes for Glassblowers**  
DURAN®. DIN 12216. With DIN-thread GL.

Thread GL	Ø mm	Wall Th. mm	SP pcs.	Cat. No.
14	12	1,5	10	1.3000.14
18	16	1,8	10	1.3000.18
25	22	1,8	10	1.3000.25
32	28	2,0	10	1.3000.32
45	40	2,3	10	1.3000.45



Screwthread Tube with NS Cone

**Screwthread Tubes with NS Cone**  
DURAN®. DIN 12257. With DIN-thread GL and NS cone.

Thread GL	Cone NS	SP pcs.	Cat. No.
14	14/23	1	1.3114.14
14	19/26	1	1.3114.19
14	24/29	1	1.3114.24
14	29/32	1	1.3114.29
18	14/23	1	1.3118.14
18	19/26	1	1.3118.19
18	24/29	1	1.3118.24
18	29/32	1	1.3118.29
25	14/23	1	1.3125.14
25	19/26	1	1.3125.19
25	24/29	1	1.3125.24
25	29/32	1	1.3125.29



Screw-Cap for Screwthread Tubes

**Screw-Caps for Screwthread Tubes**  
PBT with PTFE coated silicone rubber sealing. With DIN-thread GL. Closed top. Resistant up to 180 °C. Color: red

Thread GL	SP pcs.	Cat. No.
14	10	1.3200.14
18	10	1.3200.18
25	10	1.3200.25
32	10	1.3200.32
45	10	1.3200.45



Screw-Cap with Aperture for Screwthread Tubes

**Screw-Caps with Aperture for Screwthread Tubes**  
PBT. With DIN-thread GL. With aperture. Resistant up to 180 °C. Color: red

Thread GL	Bore mm	SP pcs.	Cat. No.
14	8	10	1.3210.14
18	11	10	1.3210.18
25	15	10	1.3210.25
32	20	10	1.3210.32
45	34	10	1.3210.45




Screw Connecting Adapters



Screwthread Coupling for Screwthread Tubes



Plastic Hose Connection, Straight

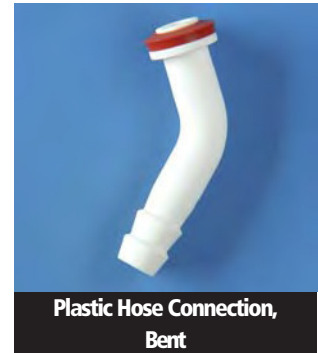

Plastic Hose Connection, Bent

Screwthread Couplings for Screwthread Tubes

PBT with integral silicone (VMQ)-PTFE sealing.  
For flexible coupling of 2 glass threads GL.  
Resistant up to approx. 200°C. Color: red.

Thread GL	SP pcs.	Cat. No.
14	1	1.3215.14
18	1	1.3215.18
25	1	1.3215.25
32	1	1.3215.32

Plastic Hose Connections

PP with silicone (VMQ) sealing.  
For screw-caps with bore and DIN-thread GL.

for GL	Description	SP pcs.	Cat. No.
14	straight	10	1.3500.00
18	straight	10	1.3500.01
14	bent	10	1.3600.00
18	bent	10	1.3600.01



Silicone Rubber Sealings with Bore

Silicone Rubber Sealings with Bore

Silicone (VMQ) with PTFE washers.  
For screw-caps with bore.

for GL	O-Ø mm	Bore mm	for Tube O-Ø mm	SP pcs.	Cat. No.
14	12	6	5,5-6,5	10	1.3314.06
18	16	6	5,5-6,5	10	1.3318.06
18	16	8	7,5-9,0	10	1.3318.08
18	16	10	9,0-11,0	10	1.3318.10
25	22	8	7,5-9,0	10	1.3325.08
25	22	10	9,0-11,0	10	1.3325.10
25	22	12	11,0-13,0	10	1.3325.12
32	29	10	9,0-11,0	10	1.3332.10
32	29	12	11,0-13,0	10	1.3332.12
32	29	14	13,0-15,0	10	1.3332.14
32	29	16	15,0-17,0	10	1.3332.16
32	29	18	17,0-19,0	10	1.3332.18
45	42	26	25,0-27,0	10	1.3345.26
45	42	32	31,0-33,0	10	1.3345.32



Silicone Rubber Seals, Septa

Silicone Rubber Seals, Septa

Silicone (VMQ). For piercing (Septa).  
For screw-caps.

for GL	O-Ø mm	Thickn. mm	SP pcs.	Cat. No.
14	12	2	100	1.3412.14
18	16	2	100	1.3416.18
25	22	2	100	1.3422.25
32	29	2	100	1.3429.32
45	42	3	100	1.3442.45

Stoppers



Hollow Stopper, Hexagonal Plate, Pointed Bottom



Hollow Stopper, Hexagonal Plate, Flat Bottom

**Hollow Stoppers, Hexagonal Plate, Pointed Bottom**  
DIN 12252 Form C. Hollow, with pointed bottom.

Cone NS	SP pcs.	Cat. No.
7/16	10	1.4000.07
10/19	10	1.4000.10
12/21	10	1.4000.12
14/23	10	1.4000.14
19/26	10	1.4000.19
24/29	10	1.4000.24
29/32	10	1.4000.29
34/35	5	1.4000.34
45/40	5	1.4000.45

**Hollow Stoppers, Hexagonal Plate, Flat Bottom**  
DIN 12252. Hollow, with flat bottom.

Cone NS	SP pcs.	Cat. No.
7/16	10	1.4003.07
10/19	10	1.4003.10
12/21	10	1.4003.12
14/23	10	1.4003.14
19/26	10	1.4003.19
24/29	10	1.4003.24
29/32	10	1.4003.29
34/35	5	1.4003.34
45/40	5	1.4003.45



Stopper, Octagonal Plate, Glass



Stopper, Octagonal Plate, Plastic

**Stoppers, Octagonal Plate, Glass**  
DIN 12252. Solid or semi-hollow.

Cone NS	Description	SP pcs.	Cat. No.
10/19	solid	10	1.4005.10
12/21	solid	10	1.4005.12
14/23	solid	10	1.4005.14
19/26	solid	10	1.4005.19
24/29	solid	10	1.4005.24
29/32	semi-hollow	10	1.4005.29
34/35	semi-hollow	1	1.4005.34
45/40	semi-hollow	1	1.4005.45

**Stoppers, Octagonal Plate, Plastic**  
PE. DIN 12254. Color: white/red

Cone NS	SP pcs.	Cat. No.
7/16	10	1.4010.07
10/19	10	1.4010.10
12/21	10	1.4010.12
14/23	10	1.4010.14
19/26	10	1.4010.19
24/29	10	1.4010.24
29/32	10	1.4010.29
34/35	5	1.4010.34
45/40	5	1.4010.45



Adapter with Ground Joint



Adapter, NS-Cone to Spherical Joint Socket

**Reduction and Expansion Adapters with Ground Joint**

DURAN®. DIN 12257.

Socket NS	Cone NS	Description	SP pcs.	Cat. No.
12/21	14/23	(1)	1	1.5012.14
14/23	12/21	(1)	1	1.5014.12
14/23	19/26	DIN	1	1.5014.19
14/23	24/29	(1)	1	1.5014.24
14/23	29/32	DIN	1	1.5014.29
19/26	14/23	DIN	1	1.5019.14
19/26	24/29	(1)	1	1.5019.24
19/26	29/32	DIN	1	1.5019.29
19/26	34/35	(1)	1	1.5019.34
24/29	14/23	(1)	1	1.5024.14
24/29	19/26	(1)	1	1.5024.19
24/29	29/32	(1)	1	1.5024.29
24/29	34/35	(1)	1	1.5024.34
24/29	45/40	(1)	1	1.5024.45
29/32	14/23	DIN	1	1.5029.14
29/32	19/26	DIN	1	1.5029.19
29/32	24/29	(1)	1	1.5029.24
29/32	34/35	(1)	1	1.5029.34
29/32	45/40	DIN	1	1.5029.45
29/32	60/46	(1)	1	1.5029.60
29/32	71/51	(1)	1	1.5029.71
34/35	19/26	(1)	1	1.5034.19
34/35	24/29	(1)	1	1.5034.24
34/35	29/32	(1)	1	1.5034.29
45/40	29/32	(1)	1	1.5045.29
45/40	34/35	(1)	1	1.5045.34
45/40	60/46	(1)	1	1.5045.60
45/40	71/51	(1)	1	1.5045.71
60/46	29/32	(1)	1	1.5060.29
60/46	45/40	(1)	1	1.5060.45
71/51	29/32	(1)	1	1.5071.29
71/51	45/40	(1)	1	1.5071.45

(1) in addition to DIN

**Adapters, NS Cone to Spherical Joint Socket**

DURAN®.

Adapters from ground joint cone to spherical joint socket.

Cone NS	Socket S	SP pcs.	Cat. No.
14/23	19	1	1.5219.14
29/32	19	1	1.5219.29
29/32	29	1	1.5229.29
29/32	35	1	1.5235.29



Adapter, Ground Joint Socket to Spherical Joint Ball

**Adapters, NS Socket to Spherical Joint Ball**

DURAN®.


Adapters from ground joint socket to spherical joint ball.

Socket NS	Ball S	SP pcs.	Cat. No.
14/23	19	1	1.5314.19
29/32	29	1	1.5329.29
29/32	35	1	1.5329.35
29/32	41	1	1.5329.41

**Tubing Connectors, straight**

DURAN®. Tubing connectors straight, with 2 hose connectors.

Total Length mm	O-Ø mm	SP pcs.	Cat. No.
115	8	10	1.6000.08
115	9	10	1.6000.09
115	10	10	1.6000.10



**Tubing Connectors, T-shape**

DURAN®. Tubing connectors T-shape, with 3 hose connectors.


Total Length mm	O-Ø mm	SP pcs.	Cat. No.
115	8-9	1	1.6005.08
115	10-11	1	1.6005.10



**Tubing Connectors, Y-shape**

DURAN®. Tubing connectors Y-shape, with 3 hose connectors.


Total Length mm	O-Ø mm	SP pcs.	Cat. No.
115	8-9	1	1.6007.08
115	10-11	1	1.6007.10

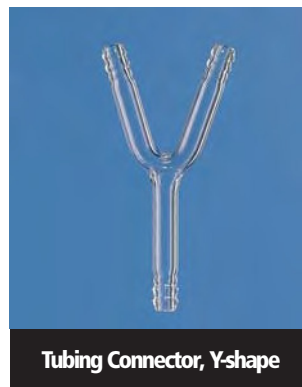


**Universal Tubing Connectors**

DURAN®. Universal tubing connectors for tubings with different diameters.

Total Length mm	for Tubing I-Ø mm	SP pcs.	Cat. No.
110	6 - 14	1	1.6010.00



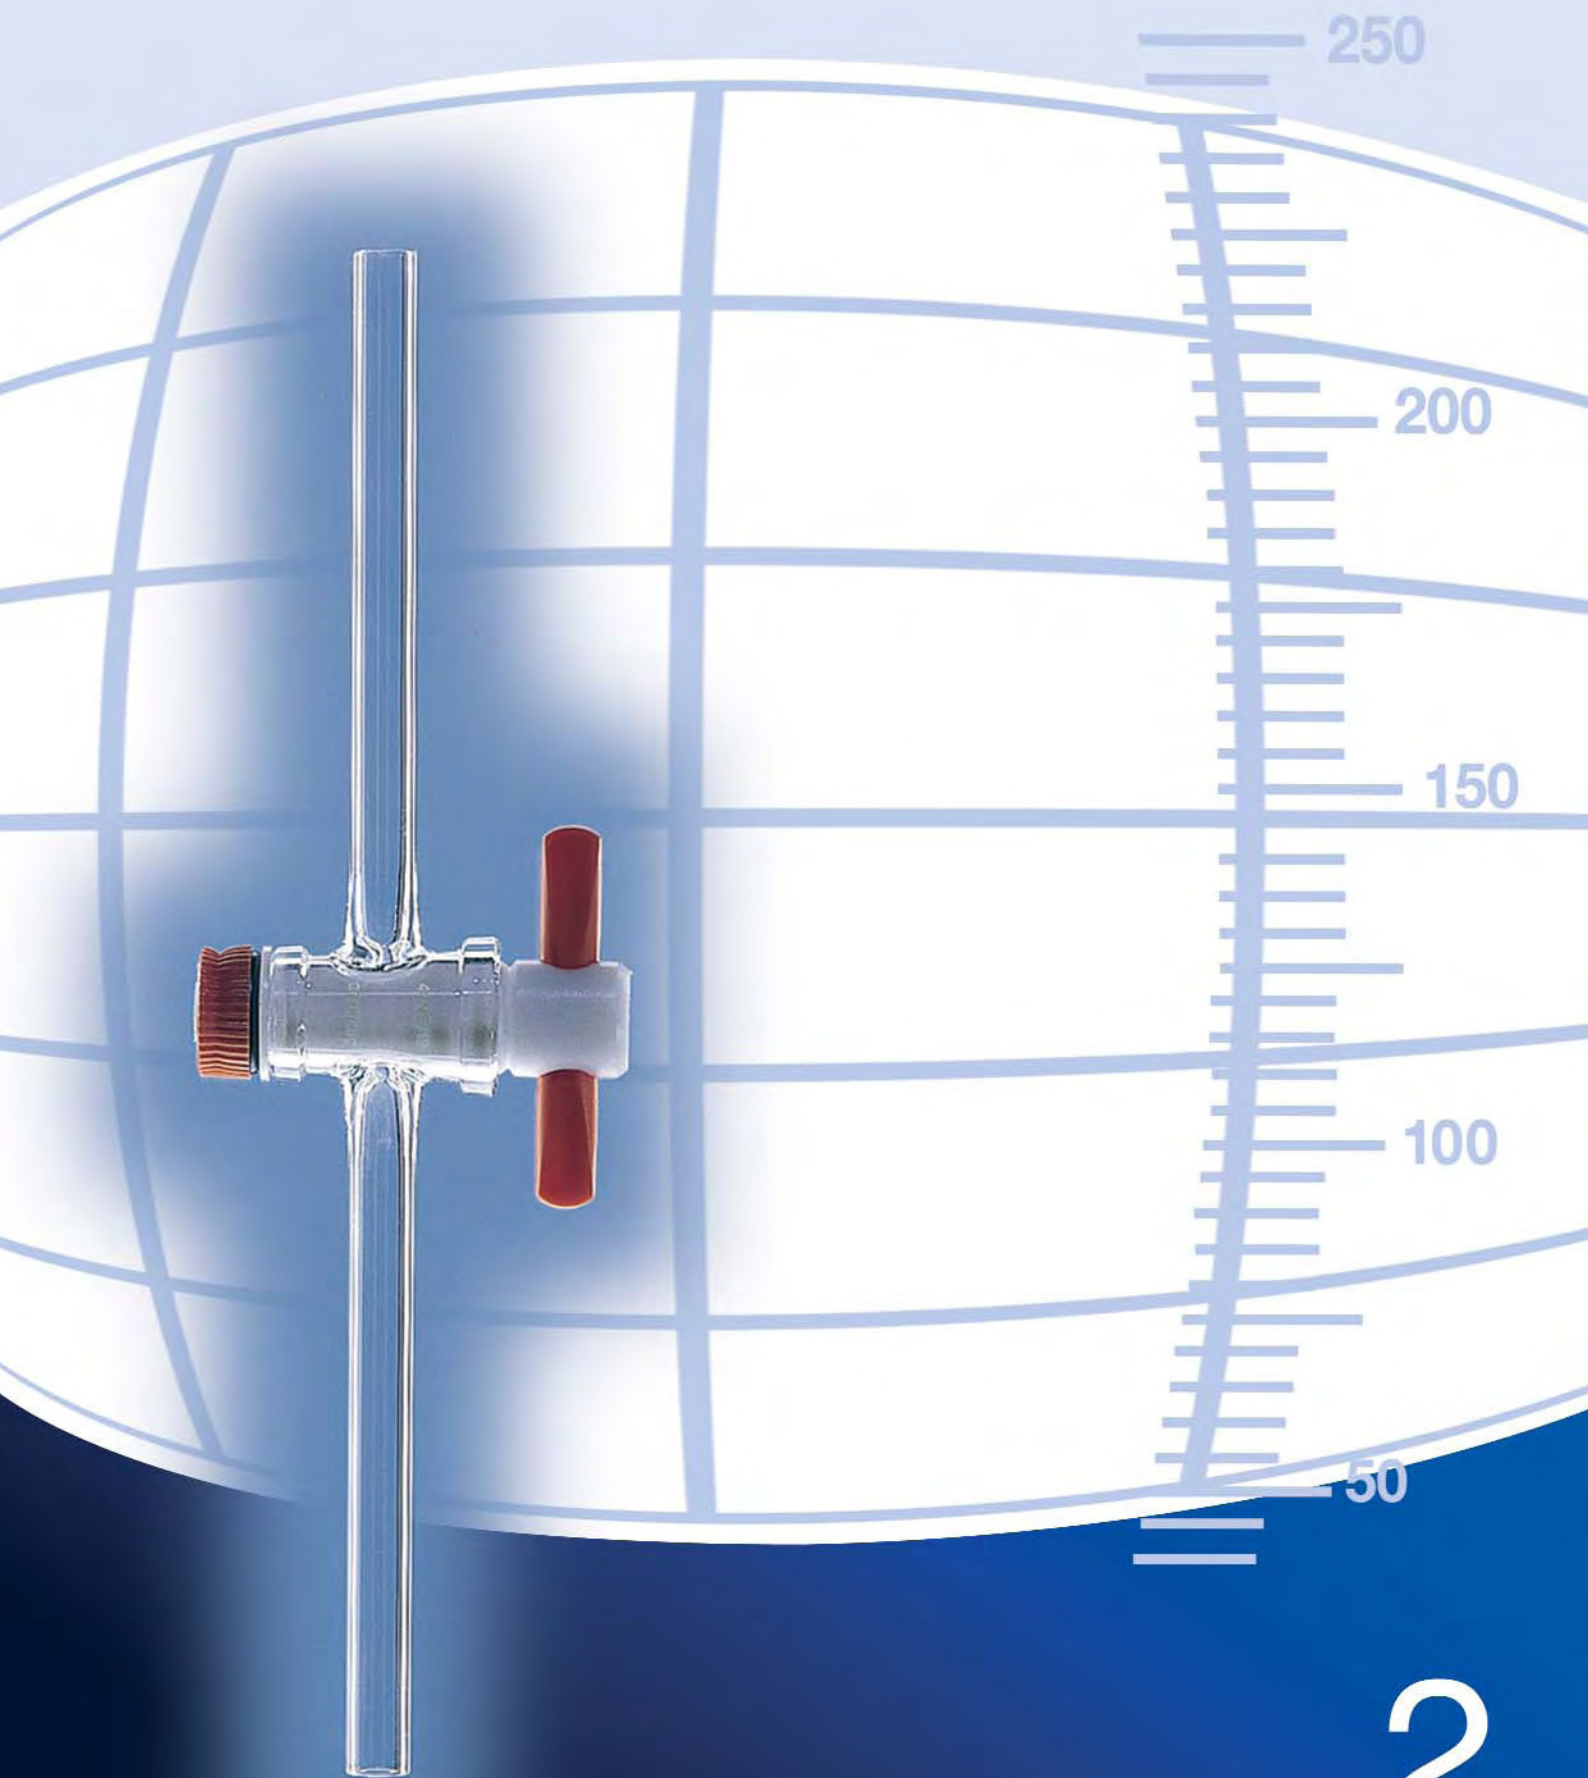

2

## Stopcocks, Straight Bore

**Stopcocks, Straight Bore with Solid Glass Plug**  
 DURAN®. DIN 12541-1. With solid NS glass plug and screwthread retaining device. With one straight bore.  
 Leakage rate acc. to DIN 12540-1.

Stopcock NS	Bore mm	Description	SP pcs.	Cat. No.
12,5	1,5	DIN	1	2.1012.01
12,5	2,5	(1)	1	2.1012.02
14,5	2,5	DIN	1	2.1014.02
14,5	4,0	(1)	1	2.1014.04
18,8	4,0	DIN	1	2.1018.04
18,8	6,0	(1)	1	2.1018.06
21,5	6,0	DIN, (2)	1	2.1021.06
24	8,0	(1), (2)	1	2.1024.08
29,2	10,0	DIN, (2)	1	2.1029.10
12,5	1,5 cap	DIN, capillary side arms	1	2.2212.01
14,5	2,5 cap	DIN, capillary side arms	1	2.2214.02

(1) in addition to DIN range

(2) supplied with rubber retaining device



Stopcock, Straight Bore with Solid Glass Plug



Stopcock, Straight Bore with Hollow Glass Plug



Stopcock, Straight Bore with PTFE Plug

**Stopcocks, Straight Bore with Hollow Glass Plug**  
 DURAN®. DIN 12451-1. With hollow NS glass plug and screwthread retaining device. With one straight bore.  
 Leakage rate acc. to DIN 12540-1.

Stopcock NS	Bore mm	SP pcs.	Cat. No.
12,5	1,5	1	2.1312.01
14,5	2,5	1	2.1314.02
18,8	4,0	1	2.1318.04
21,5	6,0	1	2.1321.06
24	8,0	1	2.1324.08
29,2	10,0	1	2.1329.10

**Spare Plugs for Stopcocks, Straight Bore**  
 With retaining device.

Stopcock NS	Bore mm	Plug	SP pcs.	Cat. No.
12,5	1,5	solid	1	2.1112.01
12,5	2,5	solid	1	2.1112.02
14,5	2,5	solid	1	2.1114.02
14,5	4,0	solid	1	2.1114.04
18,8	4,0	solid	1	2.1118.04
18,8	6,0	solid	1	2.1118.06
21,5	6,0	solid	1	2.1121.06
24	8,0	solid	1	2.1124.08
29,2	10,0	solid	1	2.1129.10
12,5	1,5	hohl	1	2.1412.01
14,5	2,5	hohl	1	2.1414.02
18,8	4,0	hohl	1	2.1418.04
21,5	6,0	hohl	1	2.1421.06
24	8,0	hohl	1	2.1424.08
29,2	10,0	hohl	1	2.1429.10
12,5	1,5	PTFE	1	2.1712.01
12,5	2,5	PTFE	1	2.1712.02
14,5	2,5	PTFE	1	2.1714.02
14,5	4,0	PTFE	1	2.1714.04
18,8	4,0	PTFE	1	2.1718.04
18,8	6,0	PTFE	1	2.1718.06
21,5	6,0	PTFE	1	2.1721.06
24	8,0	PTFE	1	2.1724.08
29,2	10,0	PTFE	1	2.1729.10

**Stopcocks, Straight Bore with PTFE Plug**  
 DURAN®. DIN 12541-1. With PTFE plug and screwthread retaining device. With one straight bore  
 Leakage rate acc. to DIN 12540-1.

Stopcock NS	Bore mm	Description	SP pcs.	Cat. No.
12,5	1,5	DIN	1	2.1612.01
12,5	2,5	(1)	1	2.1612.02
14,5	2,5	DIN	1	2.1614.02
14,5	4,0	(1)	1	2.1614.04
18,8	4,0	DIN	1	2.1618.04
18,8	6,0	(1)	1	2.1618.06
21,5	6,0	DIN	1	2.1621.06
24	8,0	(1)	1	2.1624.08
29,2	10,0	DIN	1	2.1629.10
12,5	1,5 cap	DIN, capillary side arms	1	2.2412.01
14,5	2,5 cap	DIN, capillary side arms	1	2.2414.02

(1) in addition to DIN

Needle-valve Stopcocks



2

Needle-valve Stopcock,  
Straight

Needle-valve Stopcock,  
Right-angled

Needle-valve Stopcocks, Straight

DURAN®. Smooth operating spindle of PTFE, with retention device to avoid accidentally dismounting. Screw cap and retention device of PP. Operating temperature -20 to 150 °C. Needle-valve stopcocks can be used for accurate dosing and perfectly fit to glass apparatus.

Valve Bore mm	SP pcs.	Cat. No.
0-2,5	1	2.2700.02
0-4,0	1	2.2700.04
0-6,0	1	2.2700.06

Needle-valve Stopcocks, Right-angled

DURAN®. Smooth operating spindle of PTFE, with retention device to avoid accidentally dismounting. Screw cap and retention device of PP. Operating temperature -20 to 150 °C. Needle-valve stopcocks can be used for accurate dosing and perfectly fit to glass apparatus.

Valve Bore mm	SP pcs.	Cat. No.
0-2,5	1	2.2702.02
0-4,0	1	2.2702.04
0-6,0	1	2.2702.06

Valve Keys for Needle-valve Stopcocks

Spare spindles of PTFE for easy exchange for needle-valve stopcocks.

Valve Bore mm	SP pcs.	Cat. No.
0-2,5	1	2.2800.02
0-4,0	1	2.2800.04
0-6,0	1	2.2800.06

Stopcocks, Two-way / Stopcocks, Three-way



Stopcock, Two Way with Solid Glass Plug



Stopcock, Two Way with PTFE Plug

**Stopcocks, Two Way with Solid Glass Plug**  
 DURAN®. With solid NS glass plug and screwthread retaining device.  
 With two oblique bores.  
 Leakage rate acc. to DIN 12540-1.


Stopcock NS	Bore mm	Description	SP pcs.	Cat. No.
14,5	1,5		1	2.4014.01
14,5	2,5		1	2.4014.02
18,8	4,0		1	2.4018.04
14,5	1,5 cap	capillary side arms	1	2.4614.01
14,5	2,5 cap	capillary side arms	1	2.4614.02

**Stopcocks, Two Way with PTFE Plug**  
 DURAN®. With solid NS glass plug and screwthread retaining device.  
 With two oblique bores.  
 Leakage rate acc. to DIN 12540-1.

Stopcock NS	Bore mm	Description	SP pcs.	Cat. No.
14,5	1,5		1	2.4314.01
14,5	2,5		1	2.4314.02
18,8	4,0		1	2.4318.04
14,5	1,5 cap	capillary side arms	1	2.4914.01
14,5	2,5 cap	capillary side arms	1	2.4914.02



Stopcock, Three Way with Solid Glass Plug

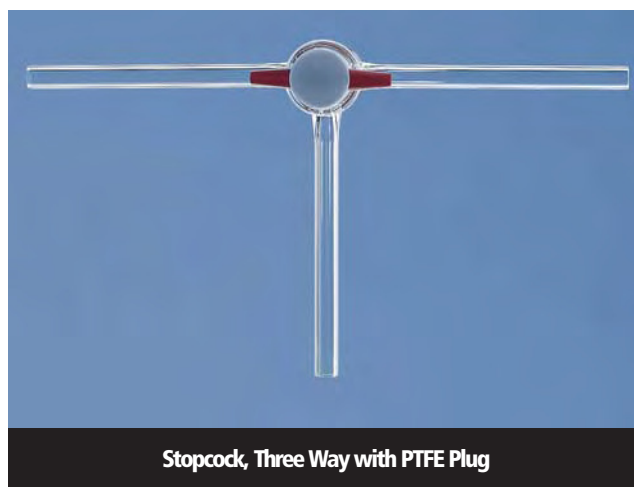

Stopcock, Three Way with PTFE Plug

**Stopcocks, Three Way with Solid Glass Plug**  
 DURAN®. DIN 12554. With solid NS glass plug and screwthread retaining device. T-Bore.  
 Leakage rate acc. to DIN 12540-1.

Stopcock NS	Bore mm	Description	SP pcs.	Cat. No.
14,5	1,5		1	2.5014.01
14,5	2,5	(1)	1	2.5014.02
18,8	2,5		1	2.5018.02
18,8	4,0	(1)	1	2.5018.04
24	4,0	(2)	1	2.5024.04
29,2	6,0	(2)	1	2.5029.06

(1) in addition to DIN

(2) supplied with rubber retaining device


**Stopcocks, Three Way with PTFE Plug**  
 DURAN®. DIN 12554. With NS PTFE plug and screwthread retaining device. T-Bore.  
 Leakage rate acc. to DIN 12540-1.

Stopcock NS	Bore mm	Description	SP pcs.	Cat. No.
14,5	1,5		1	2.5414.01
14,5	2,5	(1)	1	2.5414.02
18,8	2,5		1	2.5418.02
18,8	4,0	(1)	1	2.5418.04
24	4,0		1	2.5424.04
29,2	6,0		1	2.5429.06


(1) in addition to DIN



Stopcocks, Three-way / Burette Stopcocks

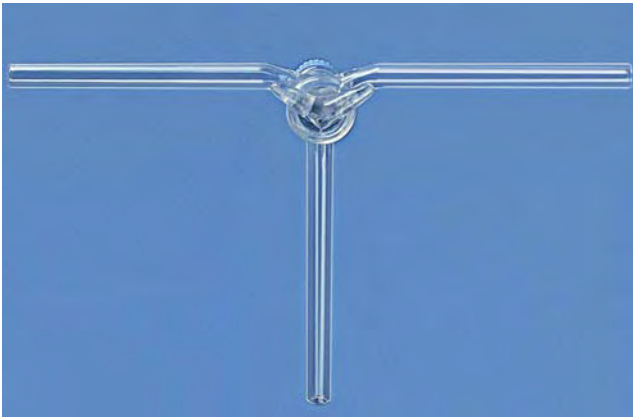

Stopcock, Three Way with Solid Glass Plug, Czako

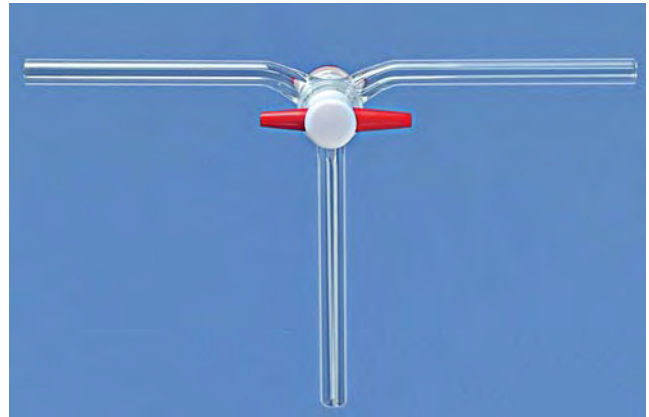

Stopcock, Three Way with PTFE Plug, Czako

Stopcocks, Three Way, to Czako

DURAN®. DIN 12563. With solid NS glass plug or PTFE plug and screwthread retaining device. Bore at an angle of 120° acc. to Czako. Leakage rate acc. to DIN 12540-1.

Stopcock NS	Bore mm	Plug	SP pcs.	Cat. No.
14,5	1,5	solid	1	2.6114.01
18,8	2,5	solid	1	2.6118.04
14,5	1,5	PTFE	1	2.6314.01
18,8	2,5	PTFE	1	2.6318.04




Burette Stopcock, Straight, with Glass Plug

Burette Stopcocks, Straight

NS stopcock made of borosilicate- or AR-Glas®. Facetted tip. Plug of solid glass or PTFE, with screwthread retaining device.

Stopcock NS	Bore mm	Stopcock	Plug	SP pcs.	Cat. No.
12,5	1,5	Boro 3.3	solid	1	2.7000.01
12,5	1,5	AR-Glas®	solid	1	2.7002.01
12,5	1,5	Boro 3.3	PTFE	1	2.7005.01
12,5	1,5	AR-Glas®	PTFE	1	2.7007.01

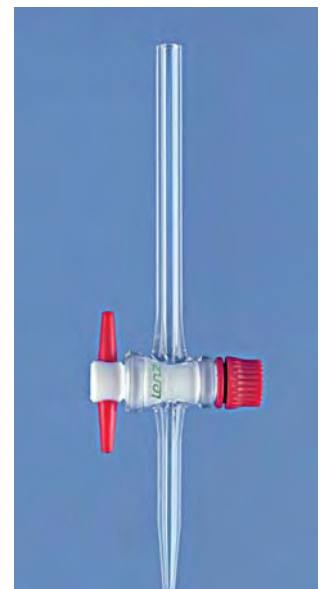

Burette Stopcock, Straight, with PTFE Plug

Burette Stopcocks



Burette Stopcock, Lateral,  
with Glass Plug



Burette Stopcock, Lateral,  
with PTFE Plug

Burette Stopcocks, Lateral

NS stopcock made of borosilicate- or AR-Glas®. Facetted tip. Plug of solid glass or PTFE, with screwthread retaining device.

Stopcock NS	Bore mm	Stopcock	Plug	SP pcs.	Cat. No.
12,5	1,5	Boro 3.3	solid	1	2.7020.01
12,5	1,5	AR-Glas®	solid	1	2.7022.01
12,5	1,5	Boro 3.3	PTFE	1	2.7025.01
12,5	1,5	AR-Glas®	PTFE	1	2.7027.01



Burette Needle-valve Stopcock,  
Straight



Burette Needle-valve Stopcock, Lateral

Burette Needle-valve Stopcocks

DURAN®. Valve housing with facetted tip, straight or lateral. PTFE spindle. Cap and security device of PP. Valve bore 0-2,5 mm.

Bore mm	Description	SP pcs.	Cat. No.
NW 2,5	straight	1	2.7009.02
NW 2,5	lateral	1	2.7029.02

Tabs / Needle-valve Stopcocks



Tab for Aspirator Bottles

Tabs for Aspirator Bottles

With solid NS glass plug and screwthread retaining device.

Cone NS	Bore mm	Description	SP pcs.	Cat. No.
19/26	4,0		1	2.8019.04
29/32	6,0	(2)	1	2.8029.06

(2) supplied with rubber retaining device



Needle-valve Stopcock for Desiccators, Lid Tubulation



Needle-valve Stopcock for Desiccators, Side Tubulation

Needle-valve Stopcocks for Desiccators

DURAN®. PTFE spindle. Hose connection with outer diameter 8 mm. Needle-valve Stopcock for lid tubulation with lateral ventilation bore for reducing turbulences.

for	Cone NS	Bore mm	SP pcs.	Cat. No.
Lid tubulation	24/29	NW 2,5	1	2.8224.04
Side tubulation	24/29	NW 2,5	1	2.8424.04

Vacuum Stopcocks



Vacuum-stopcock, One Way, Straight



Vacuum-stopcock, One Way, Parallel

**Vacuum-stopcocks, One Way , Straight**  
 DURAN®. With straight side arms and hollow NS glass plug.  
 Leakage rate acc. to DIN 12540-1.

Stopcock NS	Bore mm	SP pcs.	Cat. No.
14,5	2,5	1	2.9014.02
18,8	4,0	1	2.9018.04
21,5	6,0	1	2.9021.06
24	8,0	1	2.9024.08
29	10,0	1	2.9029.10

**Vacuum-stopcocks, One Way, Parallel**  
 DURAN®. DIN 12545. With parallel side arms and hollow NS glass plug.  
 Leakage rate acc. to DIN 12540-1.

Stopcock NS	Bore mm	Description	SP pcs.	Cat. No.
14,5	2,5	DIN	1	2.9414.02
18,8	4,0	DIN	1	2.9418.04
21,5	6,0	DIN	1	2.9421.06
24	8,0	(1)	1	2.9424.08
29	10,0	DIN	1	2.9429.10

(1) in addition to DIN range



Vacuum-stopcock, One Way, Right-angled



Vacuum-stopcock, Two Way, Right-angled

**Vacuum-Stopcocks, One Way, Right-angled**  
 DURAN®. DIN 12545. With right-angled side arms and hollow NS glass plug.  
 Leakage rate acc. to DIN 12540-1.


Stopcock NS	Bore mm	Description	SP pcs.	Cat. No.
14,5	2,5	DIN	1	2.9214.02
18,8	4,0	DIN	1	2.9218.04
21,5	6,0	DIN	1	2.9221.06
24	8,0	(1)	1	2.9224.08
29	10,0	DIN	1	2.9229.10

(1) in addition to DIN range

**Vacuum-Stopcocks, Two Way, Right-angled**  
 DURAN®. DIN 12545. T-shaped stopcocks with right-angled side arms and hollow NS glass plug.  
 Leakage rate acc. to DIN 12540-1.

Stopcock NS	Bore mm	Description	SP pcs.	Cat. No.
14,5	2,5	DIN	1	2.9614.02
18,8	4,0	DIN	1	2.9618.04
21,5	6,0	DIN	1	2.9621.06
24	8,0	(1)	1	2.9624.08
29	10,0	DIN	1	2.9629.10

(1) in addition to DIN range

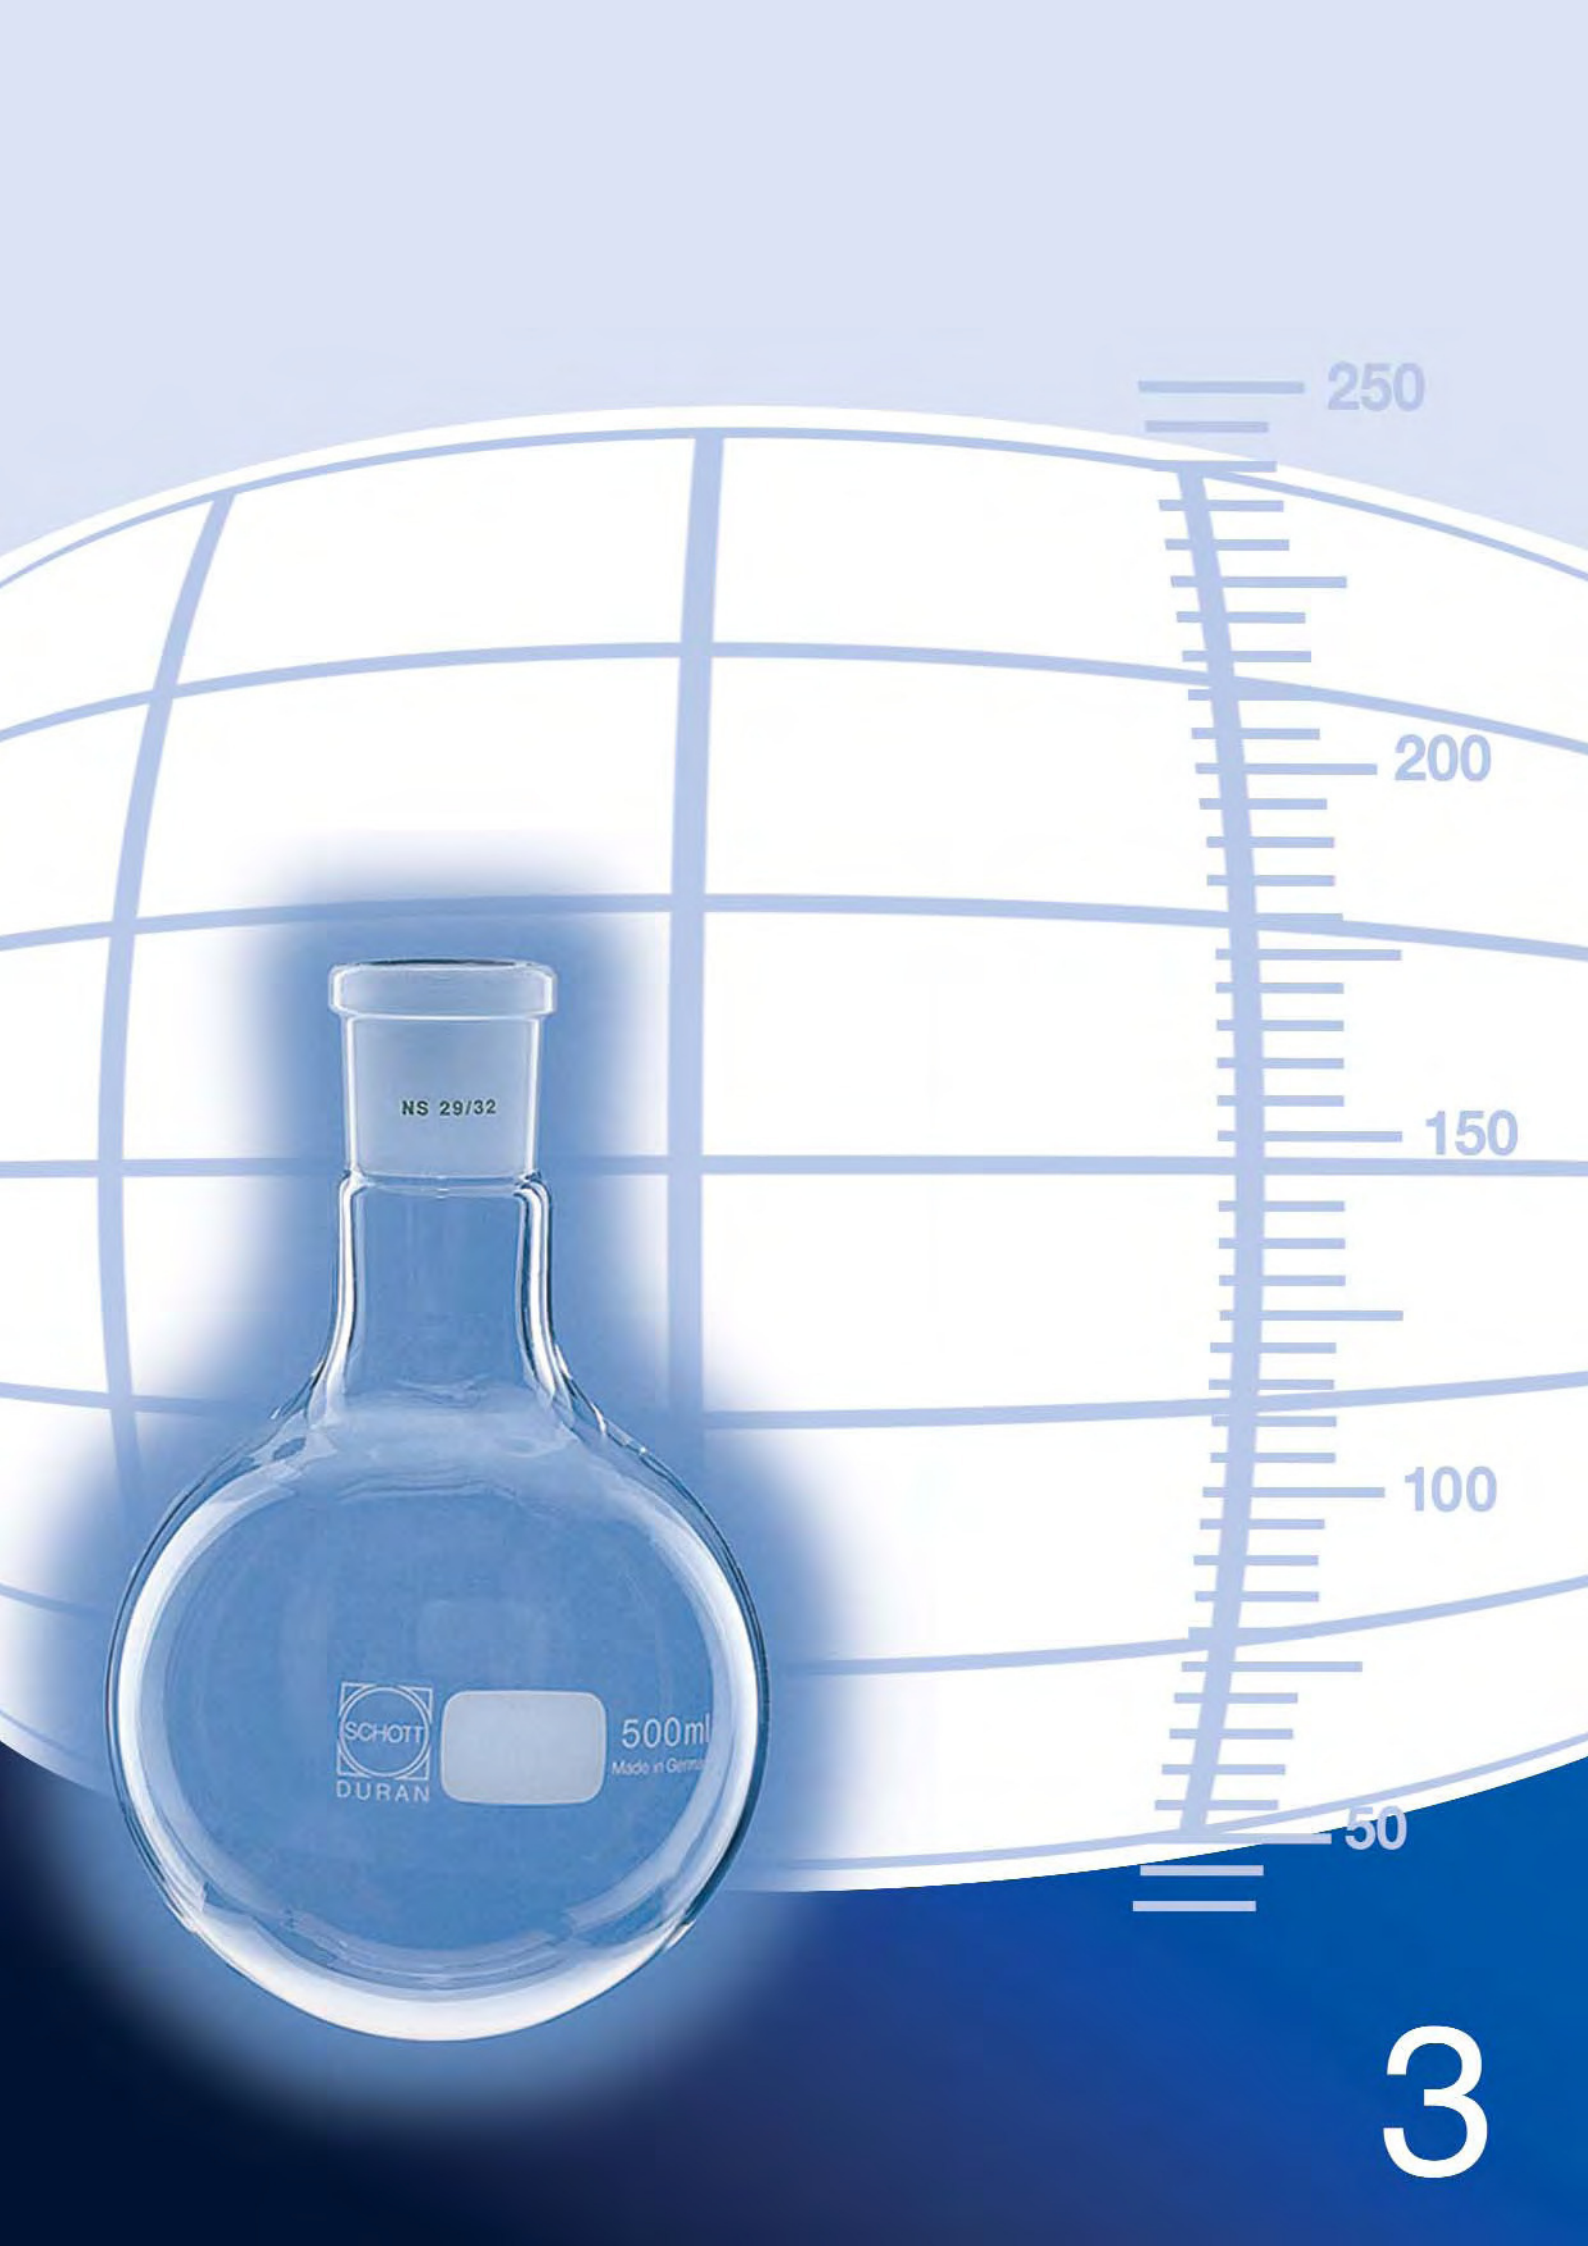

NS 29/32

SCHOTT  
DURAN

500ml  
Made in Germany

250

200

150

100

50

3

Flasks, Single-neck

3

**Round-bottom Flasks with Conical Joint**  
DURAN®. DIN 12348. With inscription label.

Capacity ml	Socket NS	Flask O-Ø mm	Description	SP pcs.	Cat. No.
5	14/23	30	(1)	10	3.0014.10
10	14/23	35	(1)	10	3.0014.13
25	14/23	41	DIN	10	3.0014.22
50	14/23	51	DIN	10	3.0014.28
100	14/23	64	DIN	10	3.0014.37
250	14/23	85	(1)	10	3.0014.49
25	19/26	41	DIN	10	3.0019.22
50	19/26	51	DIN	10	3.0019.28
100	19/26	64	DIN	10	3.0019.37
250	19/26	85	(1)	10	3.0019.49
500	19/26	105	(1)	10	3.0019.58
50	24/29	51	(1)	10	3.0024.28
100	24/29	64	(1)	10	3.0024.37
250	24/29	85	(1)	10	3.0024.49
500	24/29	105	(1)	10	3.0024.58
1000	24/29	131	(1)	10	3.0024.70
2000	24/29	166	(1)	10	3.0024.73
50	29/32	51	DIN	10	3.0029.28
100	29/32	64	DIN	10	3.0029.37
250	29/32	85	DIN	10	3.0029.49
500	29/32	105	DIN	10	3.0029.58
1000	29/32	131	DIN	10	3.0029.70
2000	29/32	166	DIN	10	3.0029.73
3000	29/32	185	(1)	1	3.0029.76
4000	29/32	207	(1)	1	3.0029.79
5000	29/32	223	(1)	1	3.0029.82
6000	29/32	236	(1)	1	3.0029.85
10000	29/32	279	(1)	1	3.0029.88
20000	29/32	345	(1)	1	3.0029.94
250	45/40	85	DIN	10	3.0045.49
500	45/40	105	DIN	10	3.0045.58
1000	45/40	131	DIN	10	3.0045.70
2000	45/40	166	DIN	10	3.0045.73
3000	45/40	185	DIN	1	3.0045.76
4000	45/40	207	DIN	1	3.0045.79
5000	45/40	223	DIN	1	3.0045.82
6000	45/40	236	DIN	1	3.0045.85
10000	45/40	279	DIN	1	3.0045.88
20000	45/40	345	(1)	1	3.0045.94

(1) in addition to DIN range



Round-bottom Flask with  
Conical Joint



Round-bottom Flask with  
Conical Joint, Amber Glass

**Round-bottom Flasks with Conical Joint, Amber**  
DURAN®. DIN 12348. With inscription label.

Capacity ml	Socket NS	Flask O-Ø mm	SP pcs.	Cat. No.
50	29/32	51	10	3.0031.28
100	29/32	64	10	3.0031.37
250	29/32	85	10	3.0031.49
500	29/32	105	10	3.0031.58
1000	29/32	131	10	3.0031.70

Flasks, Single-neck



Flat-bottom Flask with Conical Joint



Erlenmeyer Flask with Conical Joint

Flat Bottom Flasks with Conical Joint					
DURAN®. DIN 12348. With inscription label.					
Capacity ml	Socket NS	Flask O-Ø mm	Description	SP pcs.	Cat. No.
50	19/26	51	DIN	10	3.0119.28
100	19/26	64	DIN	10	3.0119.37
250	19/26	85	(1)	10	3.0119.49
500	19/26	105	(1)	10	3.0119.58
50	24/29	51	(1)	10	3.0124.28
100	24/29	64	(1)	10	3.0124.37
250	24/29	85	(1)	10	3.0124.49
500	24/29	105	(1)	10	3.0124.58
1000	24/29	131	(1)	10	3.0124.70
2000	24/29	166	(1)	10	3.0124.73
50	29/32	51	DIN	10	3.0129.28
100	29/32	64	DIN	10	3.0129.37
250	29/32	85	DIN	10	3.0129.49
500	29/32	105	DIN	10	3.0129.58
1000	29/32	131	DIN	10	3.0129.70
2000	29/32	166	DIN	10	3.0129.73

(1) in addition to DIN range

Erlenmeyer Flasks with Conical Joint					
DURAN®. DIN 12387. With graduation for the reading of the approx. volume and inscription label.					
Capacity ml	Socket NS	Flask O-Ø mm	Description	SP pcs.	Cat. No.
10	14/23	42	(1)	10	3.0214.13
25	14/23	42	DIN	10	3.0214.22
50	14/23	51	DIN	10	3.0214.28
100	14/23	64	DIN	10	3.0214.37
25	19/26	42	DIN	10	3.0219.22
50	19/26	51	DIN	10	3.0219.28
100	19/26	64	DIN	10	3.0219.37
200	19/26	79	(1)	10	3.0219.46
250	19/26	85	(1)	10	3.0219.49
50	24/29	51	(1)	10	3.0224.28
100	24/29	64	(1)	10	3.0224.37
200	24/29	79	(1)	10	3.0224.46
250	24/29	85	(1)	10	3.0224.49
300	24/29	87	(1)	10	3.0224.52
500	24/29	105	(1)	10	3.0224.58
1000	24/29	131	(1)	10	3.0224.70
2000	24/29	166	(1)	10	3.0224.73
50	29/32	51	DIN	10	3.0229.28
100	29/32	64	DIN	10	3.0229.37
200	29/32	79	(1)	10	3.0229.46
250	29/32	85	DIN	10	3.0229.49
300	29/32	87	(1)	10	3.0229.52
500	29/32	105	DIN	10	3.0229.58
1000	29/32	131	DIN	10	3.0229.70
2000	29/32	166	(1)	10	3.0229.73
200	45/40	79	(1)	10	3.0245.46
250	45/40	85	DIN	10	3.0245.49
300	45/40	87	(1)	10	3.0245.52
500	45/40	105	DIN	10	3.0245.58
1000	45/40	131	DIN	10	3.0245.70
2000	45/40	166	(1)	10	3.0245.73
3000	45/40	185	(1)	10	3.0245.76
5000	45/40	223	(1)	10	3.0245.82

(1) in addition to DIN range

Flasks, Single-neck



Erlenmeyer Flask with DIN-thread



Pear-shape Flask, Single-neck

Erlenmeyer Flasks with DIN-Thread

DURAN®. With DIN-thread GL and screw cap, red, PBT. With graduation for the reading of the approx. volume and inscription label.

Capacity ml	Thread GL	Flask O-Ø mm	SP pcs.	Cat. No.
100	25	64	10	3.0251.37
250	32	85	10	3.0251.49
500	32	105	10	3.0251.58
1000	32	131	10	3.0251.70

Pear-shape Flasks, Single-neck

DURAN®. DIN 12383. With conical joint and inscription label.

Capacity ml	Socket NS	Flask O-Ø mm	Description	SP pcs.	Cat. No.
5	14/23	26	(1)	10	3.0314.10
10	14/23	30	(1)	10	3.0314.13
25	14/23	40	(1)	10	3.0314.22
50	14/23	50	(1)	10	3.0314.28
100	14/23	64	(1)	10	3.0314.37
250	14/23	85	DIN	10	3.0314.49
25	19/26	40	(1)	10	3.0319.22
50	19/26	50	DIN	10	3.0319.28
100	19/26	64	DIN	10	3.0319.37
250	19/26	85	DIN	10	3.0319.49
50	29/32	50	(1)	10	3.0329.28
100	29/32	64	(1)	10	3.0329.37
250	29/32	85	(1)	10	3.0329.49

(1) in addition to DIN range

Iodine Determination Flasks

DURAN®. Two types available:

- DIN 12387. Without collar, with hollow hexagonal stopper NS 29/32.
- With collar and iodine stopper NS 29/32.

Capacity ml	Socket NS	Flask O-Ø mm	Description	SP pcs.	Cat. No.
100	29/32	64	w/o collar	10	3.0260.37
250	29/32	85	w/o collar	10	3.0260.49
300	29/32	87	w/o collar	10	3.0260.52
500	29/32	105	w/o collar	10	3.0260.58
1000	29/32	131	w/o collar	10	3.0260.70
100	29/32	64	with collar	10	3.0262.37
250	29/32	85	with collar	10	3.0262.49
500	29/32	105	with collar	10	3.0262.58



Iodine Flask without Collar



Iodine Flask with Collar



Flasks, Single-neck



Evaporating Flask



Kjeldahl Flask

Evaporating Flasks

DURAN®. Especially for rotary evaporators.  
With center neck and conical joint. Pear-shaped.

Capacity ml	Socket NS	Flask O-Ø mm	SP pcs.	Cat. No.
50	29/32	56	10	3.0429.28
100	29/32	60	10	3.0429.37
250	29/32	81	10	3.0429.49
500	29/32	101	10	3.0429.58
1000	29/32	126	10	3.0429.70
2000	29/32	158	10	3.0429.73
3000	29/32	175	10	3.0429.76

Kjeldahl Flasks

DURAN®. For the determination of nitrogen in organic compounds.  
With center neck and conical joint.

Capacity ml	Socket NS	Flask O-Ø mm	SP pcs.	Cat. No.
50	19/26	51	10	3.0519.28
100	19/26	60	10	3.0519.37
250	29/32	81	10	3.0529.49
500	29/32	101	10	3.0529.58
750	29/32	115	10	3.0529.64
1000	29/32	126	10	3.0529.70



Powder Flask



Receiving Flask

Powder Flasks

DURAN®. Especially for rotary evaporators. For the drying of powder-like substances. With center neck and conical joint.

Capacity ml	Socket NS	Flask O-Ø mm	SP pcs.	Cat. No.
100	29/32	60	1	3.0430.37
250	29/32	81	1	3.0430.49
500	29/32	101	1	3.0430.58
1000	29/32	126	1	3.0430.70
2000	29/32	158	1	3.0430.73

Receiving Flasks

DURAN®. Especially for rotary evaporators.  
With spherical joint socket S 35.

Capacity ml	Socket S	Flask O-Ø mm	SP pcs.	Cat. No.
100	35	64	1	3.0635.37
250	35	85	1	3.0635.49
500	35	105	1	3.0635.58
1000	35	131	1	3.0635.70
2000	35	166	1	3.0635.73

Flasks, Multi-neck

Round-bottom Flasks, Two-neck, Side Neck Parallel

DURAN®.

Capacity ml	C. Neck NS	Side Neck NS	Flask O-Ø mm	SP pcs.	Cat. No.
100	29/32	14/23	64	1	3.2041.37
250	29/32	14/23	85	1	3.2041.49
500	29/32	14/23	105	1	3.2041.58
1000	29/32	14/23	131	1	3.2041.70
2000	29/32	14/23	166	1	3.2041.73
250	29/32	29/32	85	1	3.2044.49
500	29/32	29/32	105	1	3.2044.58
1000	29/32	29/32	131	1	3.2044.70
2000	29/32	29/32	166	1	3.2044.73
4000	29/32	29/32	207	1	3.2044.79



Round-bottom Flask, Two-neck, Side Neck Parallel

3

Round-bottom Flasks, Two-neck, Side Neck Angled

DURAN®. DIN 12394. Side neck at 20° angle. Distillation flask.



Round-bottom Flask, Two-neck, Side Neck Angled

Capacity ml	C. Neck NS	Side Neck NS	Flask O-Ø mm	Description	SP pcs.	Cat. No.
25	14/23	14/23	41	DIN	1	3.2111.22
50	14/23	14/23	51	DIN	1	3.2111.28
100	14/23	14/23	64	(1)	1	3.2111.37
250	14/23	14/23	85	DIN	1	3.2111.49
100	24/29	14/23	64	(1)	1	3.2131.37
250	24/29	14/23	85	(1)	1	3.2131.49
500	24/29	14/23	105	(1)	1	3.2131.58
100	24/29	19/26	64	(1)	1	3.2132.37
250	24/29	19/26	85	(1)	1	3.2132.49
500	24/29	19/26	105	DIN	1	3.2132.58
1000	24/29	19/26	131	(1)	1	3.2132.70
100	29/32	14/23	64	(1)	1	3.2141.37
250	29/32	14/23	85	DIN	1	3.2141.49
500	29/32	14/23	105	DIN	1	3.2141.58
1000	29/32	14/23	131	DIN	1	3.2141.70
2000	29/32	14/23	166	DIN	1	3.2141.73
100	29/32	19/26	64	DIN	1	3.2142.37
250	29/32	19/26	85	DIN	1	3.2142.49
500	29/32	19/26	105	DIN	1	3.2142.58
1000	29/32	19/26	131	DIN	1	3.2142.70
2000	29/32	19/26	166	DIN	1	3.2142.73
100	29/32	29/32	64	DIN	1	3.2144.37
250	29/32	29/32	85	DIN	1	3.2144.49
500	29/32	29/32	105	(1)	1	3.2144.58
1000	29/32	29/32	131	DIN	1	3.2144.70
2000	29/32	29/32	166	DIN	1	3.2144.73
4000	29/32	29/32	207	DIN	1	3.2144.79

(1) in addition to DIN range

Flasks, Multi-neck

Pear-shape Flasks, Two-neck

DURAN®. Side neck at an angle of 25°.

Capacity ml	C. Neck NS	Side Neck NS	Flask O-Ø mm	SP pcs.	Cat. No.
25	14/23	14/23	40	1	3.2211.22
50	14/23	14/23	50	1	3.2211.28
100	14/23	14/23	64	1	3.2211.37
250	14/23	14/23	85	1	3.2211.49
25	19/26	14/23	40	1	3.2221.22
50	19/26	14/23	50	1	3.2221.28
100	19/26	14/23	64	1	3.2221.37
250	19/26	14/23	85	1	3.2221.49



Pear-shape Flask, Two-neck



Nitrogen Round-bottom Flask  
(Schlenk-Flasks)



Nitrogen Tube  
with Socket



Nitrogen Tube  
with Cone

Nitrogen Round-bottom Flasks (Schlenk-Flasks)

DURAN®. With conical joint and NS stopcock.

Capacity ml	Socket NS	NS Stopcock Bore mm	SP pcs.	Cat. No.
25	14/23	2,5	1	3.3601.22
50	14/23	2,5	1	3.3601.28
100	14/23	2,5	1	3.3601.37
250	14/23	2,5	1	3.3601.49
50	29/32	2,5	1	3.3604.28
100	29/32	2,5	1	3.3604.37
250	29/32	2,5	1	3.3604.49
500	29/32	2,5	1	3.3604.58
1000	29/32	2,5	1	3.3604.70

Nitrogen Tubes (Schlenk-Tubes)

DURAN®. With conical joint and NS stopcock.

Capacity ml	Socket NS	NS Stopcock Bore mm	SP pcs.	Cat. No.
10	14/23 Socket	2,5	1	3.3701.13
25	14/23 Socket	2,5	1	3.3701.22
50	14/23 Socket	2,5	1	3.3701.28
100	14/23 Socket	2,5	1	3.3701.37
250	14/23 Socket	2,5	1	3.3701.49
10	14/23 Cone	2,5	1	3.3702.13
25	14/23 Cone	2,5	1	3.3702.22
50	14/23 Cone	2,5	1	3.3702.28
100	14/23 Cone	2,5	1	3.3702.37
250	14/23 Cone	2,5	1	3.3702.49

Flasks, Multi-neck



Round-bottom Flask,  
Three-neck, Side Necks Parallel

Round-bottom Flasks, Three-neck, Side Necks Parallel

DURAN®. DIN 12392. Side necks parallel. Reaction flasks.

Capacity ml	C. Neck NS	Side Necks NS	Flask O-Ø mm	Description	SP pcs.	Cat. No.
100	24/29	19/26	64	(1)	1	3.3032.37
250	24/29	19/26	85	(1)	1	3.3032.49
500	24/29	19/26	105	(1)	1	3.3032.58
1000	24/29	19/26	131	(1)	1	3.3032.70
2000	24/29	19/26	166	(1)	1	3.3032.73
100	29/32	14/23	64	(1)	1	3.3041.37
250	29/32	14/23	85	(1)	1	3.3041.49
500	29/32	14/23	105	(1)	1	3.3041.58
1000	29/32	14/23	131	(1)	1	3.3041.70
2000	29/32	14/23	166	(1)	1	3.3041.73
3000	29/32	14/23	185	(1)	1	3.3041.76
4000	29/32	14/23	207	(1)	1	3.3041.79
6000	29/32	14/23	236	(1)	1	3.3041.85
100	29/32	19/26	64	DIN	1	3.3042.37
250	29/32	19/26	85	DIN	1	3.3042.49
500	29/32	19/26	105	DIN	1	3.3042.58
1000	29/32	19/26	131	DIN	1	3.3042.70
2000	29/32	19/26	166	(1)	1	3.3042.73
100	29/32	29/32	64	DIN	1	3.3044.37
250	29/32	29/32	85	DIN	1	3.3044.49
500	29/32	29/32	105	DIN	1	3.3044.58
1000	29/32	29/32	131	(1)	1	3.3044.70
2000	29/32	29/32	166	(1)	1	3.3044.73
3000	29/32	29/32	185	(1)	1	3.3044.76
4000	29/32	29/32	207	DIN	1	3.3044.79
5000	29/32	29/32	223	DIN	1	3.3044.82
6000	29/32	29/32	236	DIN	1	3.3044.85
10000	29/32	29/32	279	DIN	1	3.3044.88
1000	45/40	29/32	131	(1)	1	3.3054.70
2000	45/40	29/32	166	(1)	1	3.3054.73
3000	45/40	29/32	185	(1)	1	3.3054.76
4000	45/40	29/32	207	(1)	1	3.3054.79
5000	45/40	29/32	223	(1)	1	3.3054.82
6000	45/40	29/32	236	(1)	1	3.3054.85
10000	45/40	29/32	279	(1)	1	3.3054.88
20000	45/40	29/32	345	(1)	1	3.3054.94

(1) in addition to DIN range

Flasks, Multi-neck

Round-bottom Flasks, Three-neck, Side Necks Angled						
DURAN®. DIN 12394. Side necks at 20° angle. Distillation flasks.						
Capacity ml	C. Neck NS	Side Necks NS	Flask O-Ø mm	Description	SP pcs.	Cat. No.
50	14/23	14/23	51	(1)	1	3.3111.28
100	14/23	14/23	64	(1)	1	3.3111.37
100	24/29	14/23	64	(1)	1	3.3131.37
250	24/29	14/23	85	(1)	1	3.3131.49
500	24/29	14/23	105	(1)	1	3.3131.58
1000	24/29	14/23	131	(1)	1	3.3131.70
100	24/29	19/26	64	(1)	1	3.3132.37
250	24/29	19/26	85	(1)	1	3.3132.49
500	24/29	19/26	105	(1)	1	3.3132.58
1000	24/29	19/26	131	(1)	1	3.3132.70
2000	24/29	19/26	166	(1)	1	3.3132.73
100	29/32	14/23	64	(1)	1	3.3141.37
250	29/32	14/23	85	DIN	1	3.3141.49
500	29/32	14/23	105	DIN	1	3.3141.58
1000	29/32	14/23	131	DIN	1	3.3141.70
2000	29/32	14/23	166	DIN	1	3.3141.73
3000	29/32	14/23	185	(1)	1	3.3141.76
4000	29/32	14/23	207	(1)	1	3.3141.79
6000	29/32	14/23	236	(1)	1	3.3141.85
100	29/32	19/26	64	(1)	1	3.3142.37
250	29/32	19/26	85	DIN	1	3.3142.49
500	29/32	19/26	105	DIN	1	3.3142.58
1000	29/32	19/26	131	DIN	1	3.3142.70
2000	29/32	19/26	166	DIN	1	3.3142.73
100	29/32	29/32	64	(1)	1	3.3144.37
250	29/32	29/32	85	(1)	1	3.3144.49
500	29/32	29/32	105	(1)	1	3.3144.58
1000	29/32	29/32	131	(1)	1	3.3144.70
2000	29/32	29/32	166	(1)	1	3.3144.73
3000	29/32	29/32	185	(1)	1	3.3144.76
4000	29/32	29/32	207	(1)	1	3.3144.79
5000	29/32	29/32	223	(1)	1	3.3144.82
6000	29/32	29/32	236	(1)	1	3.3144.85
10000	29/32	29/32	279	(1)	1	3.3144.88
1000	45/40	29/32	131	(1)	1	3.3154.70
2000	45/40	29/32	166	(1)	1	3.3154.73
3000	45/40	29/32	185	(1)	1	3.3154.76
4000	45/40	29/32	207	(1)	1	3.3154.79
5000	45/40	29/32	223	(1)	1	3.3154.82
6000	45/40	29/32	236	(1)	1	3.3154.85
10000	45/40	29/32	279	(1)	1	3.3154.88
20000	45/40	29/32	345	(1)	1	3.3154.94

(1) in addition to DIN range



Round-bottom Flask, Three-neck, Side Necks Angled

**Round-bottom Flasks, Four-neck**

DURAN®. DIN 12392. With 3 parallel side necks. Reaction flasks.

Capacity ml	C. Neck NS	Side Necks NS	Flask O-Ø mm	Description	SP pcs.	Cat. No.
500	29/32	29/32	105	DIN	1	3.3444.58
1000	29/32	29/32	131	DIN	1	3.3444.70
2000	29/32	29/32	166	DIN	1	3.3444.73
3000	29/32	29/32	185	(1)	1	3.3444.76
4000	29/32	29/32	207	(1)	1	3.3444.79
6000	29/32	29/32	236	(1)	1	3.3444.85
1000	45/40	29/32	131	DIN	1	3.3454.70
2000	45/40	29/32	166	DIN	1	3.3454.73
3000	45/40	29/32	185	(1)	1	3.3454.76
4000	45/40	29/32	207	DIN	1	3.3454.79
5000	45/40	29/32	223	(1)	1	3.3454.82
6000	45/40	29/32	236	DIN	1	3.3454.85
10000	45/40	29/32	279	(1)	1	3.3454.88

(1) in addition to DIN range



**Round-bottom Flask,  
Four-neck**



Separating Funnels



Separating Funnel, Conical, without Graduation, Glass Plug



Separating Funnel, Conical, without Graduation, PTFE Plug



Separating Funnel, Conical, with Graduation, Glass Plug



Separating Funnel, Conical, with Graduation, PTFE Plug

Separating Funnels, Conical

DURAN®. Conical shape. With NS-socket and interchangeable PE stopper, plug with retaining device.

Four types available:

- Without graduation, with solid glass plug
- Without graduation, with PTFE plug
- With graduation for reading of the approx. volume, with solid glass plug
- With graduation for reading of the approx. volume, with PTFE plug


Capacity ml	Socket NS	Bore mm	Graduation ml	Plug	SP pcs.	Cat. No.
50	19/26	2,5	-	solid	2	4.0000.28
100	19/26	2,5	-	solid	2	4.0000.37
250	29/32	4,0	-	solid	2	4.0000.49
500	29/32	4,0	-	solid	2	4.0000.58
1000	29/32	6,0	-	solid	2	4.0000.70
2000	29/32	6,0	-	solid	1	4.0000.73
50	19/26	2,5	-	PTFE	2	4.0041.28
100	19/26	2,5	-	PTFE	2	4.0041.37
250	29/32	4,0	-	PTFE	2	4.0041.49
500	29/32	4,0	-	PTFE	2	4.0041.58
1000	29/32	6,0	-	PTFE	2	4.0041.70
2000	29/32	6,0	-	PTFE	1	4.0041.73
50	19/26	2,5	2	solid	2	4.0020.28
100	19/26	2,5	5	solid	2	4.0020.37
250	29/32	4,0	10	solid	2	4.0020.49
500	29/32	4,0	10	solid	2	4.0020.58
1000	29/32	6,0	20	solid	2	4.0020.70
2000	29/32	6,0	50	solid	1	4.0020.73
50	19/26	2,5	2	PTFE	2	4.0061.28
100	19/26	2,5	5	PTFE	2	4.0061.37
250	29/32	4,0	10	PTFE	2	4.0061.49
500	29/32	4,0	10	PTFE	2	4.0061.58
1000	29/32	6,0	20	PTFE	2	4.0061.70
2000	29/32	6,0	50	PTFE	1	4.0061.73



Separating Funnels



Separating Funnel, Squibb, without Graduation, Glass Plug

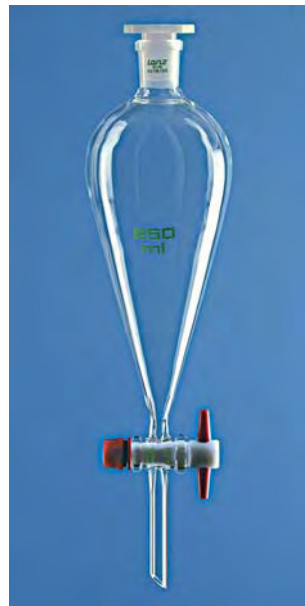

Separating Funnel, Squibb, without Graduation, PTFE Plug



Separating Funnel, Squibb, with Graduation, Glass Plug



Separating Funnel, Squibb, with Graduation, PTFE Plug

Separating Funnels, Squibb

Borosilicate glass 3.3. With NS-socket and interchangeable PE stopper, plug with retaining device.

Four types available:

- Without graduation, with solid glass plug
- Without graduation, with PTFE plug
- With graduation for reading of the approx. volume, with solid glass plug
- With graduation for reading of the approx. volume, with PTFE plug

Capacity ml	Socket NS	Bore mm	Graduation ml	Plug	SP pcs.	Cat. No.
50	19/26	2,5	-	solid	2	4.0100.28
100	19/26	2,5	-	solid	2	4.0100.37
250	19/26	4,0	-	solid	2	4.0100.49
500	29/32	4,0	-	solid	2	4.0100.58
1000	29/32	6,0	-	solid	2	4.0100.70
2000	29/32	6,0	-	solid	1	4.0100.73
50	19/26	2,5	-	PTFE	2	4.0141.28
100	19/26	2,5	-	PTFE	2	4.0141.37
250	19/26	4,0	-	PTFE	2	4.0141.49
500	29/32	4,0	-	PTFE	2	4.0141.58
1000	29/32	6,0	-	PTFE	2	4.0141.70
2000	29/32	6,0	-	PTFE	1	4.0141.73
50	19/26	2,5	2	solid	2	4.0120.28
100	19/26	2,5	5	solid	2	4.0120.37
250	19/26	4,0	5	solid	2	4.0120.49
500	29/32	4,0	10	solid	2	4.0120.58
1000	29/32	6,0	20	solid	2	4.0120.70
2000	29/32	6,0	50	solid	1	4.0120.73
50	19/26	2,5	2	PTFE	2	4.0161.28
100	19/26	2,5	5	PTFE	2	4.0161.37
250	19/26	4,0	5	PTFE	2	4.0161.49
500	29/32	4,0	10	PTFE	2	4.0161.58
1000	29/32	6,0	20	PTFE	2	4.0161.70
2000	29/32	6,0	50	PTFE	1	4.0161.73

Separating Funnels

Separating Funnels, Cylindrical

Borosilicate glass 3.3. Cylindrical shape with straight discharge tube. With NS-socket and interchangeable PE stopper, plug with retaining device. With graduation for reading of the approx. volume.

Two types available:

- With solid glass plug
- With PTFE plug

Capacity ml	Socket NS	Bore mm	Graduation ml	Plug	SP pcs.	Cat. No.
50	29/32	2,5	1	solid	2	4.0220.28
100	29/32	2,5	2	solid	2	4.0220.37
250	29/32	4,0	5	solid	2	4.0220.49
500	29/32	4,0	10	solid	2	4.0220.58
1000	29/32	6,0	20	solid	2	4.0220.70
50	29/32	2,5	1	PTFE	2	4.0261.28
100	29/32	2,5	2	PTFE	2	4.0261.37
250	29/32	4,0	5	PTFE	2	4.0261.49
500	29/32	4,0	10	PTFE	2	4.0261.58
1000	29/32	6,0	20	PTFE	2	4.0261.70




Separating Funnel, Cylindrical, with Glass Plug



Separating Funnel, Cylindrical, with PTFE Plug



Separating Funnel, Gilson, with Glass Plug

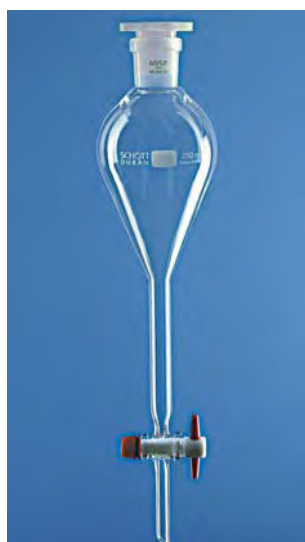

Separating Funnel, Gilson, with PTFE Plug

Separating Funnels, Gilson

DURAN®. With NS-socket and interchangeable PE stopper, plug with retaining device. Without graduation.

Two types available:

- With solid glass plug
- With PTFE plug

Capacity ml	Socket NS	Bore mm	Plug	SP pcs.	Cat. No.
50	19/26	2,5	solid	2	4.0300.28
100	19/26	2,5	solid	2	4.0300.37
250	29/32	4,0	solid	2	4.0300.49
500	29/32	4,0	solid	2	4.0300.58
1000	29/32	6,0	solid	2	4.0300.70
2000	29/32	6,0	solid	1	4.0300.73
50	19/26	2,5	PTFE	2	4.0301.28
100	19/26	2,5	PTFE	2	4.0301.37
250	29/32	4,0	PTFE	2	4.0301.49
500	29/32	4,0	PTFE	2	4.0301.58
1000	29/32	6,0	PTFE	2	4.0301.70
2000	29/32	6,0	PTFE	1	4.0301.73

## Dropping Funnels


### Dropping Funnels, Cylindrical

Borosilicate glass 3.3. Cylindrical shape. With NS-socket and interchangeable PE stopper, plug with retaining device. With graduation for reading of the approx. volume.


Two types available:

- With solid glass plug
- With PTFE plug

Capacity ml	Socket / Cone NS	Bore mm	Graduation ml	Plug	SP pcs.	Cat. No.
25	14/23	2,5	1	solid	2	4.1522.11
50	14/23	2,5	1	solid	2	4.1528.11
50	29/32	2,5	1	solid	2	4.1528.14
100	14/23	2,5	2	solid	2	4.1537.11
100	29/32	2,5	2	solid	2	4.1537.14
250	29/32	4,0	5	solid	2	4.1549.14
500	29/32	4,0	10	solid	2	4.1558.14
1000	29/32	6,0	20	solid	2	4.1570.14
25	14/23	2,5	1	PTFE	2	4.1722.11
50	14/23	2,5	1	PTFE	2	4.1728.11
50	29/32	2,5	1	PTFE	2	4.1728.14
100	14/23	2,5	2	PTFE	2	4.1737.11
100	29/32	2,5	2	PTFE	2	4.1737.14
250	29/32	4,0	5	PTFE	2	4.1749.14
500	29/32	4,0	10	PTFE	2	4.1758.14
1000	29/32	6,0	20	PTFE	2	4.1770.14

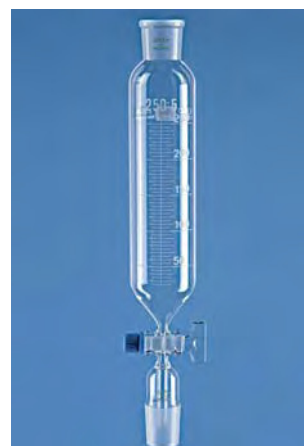

Dropping Funnel, Cylindrical, with Glass Plug

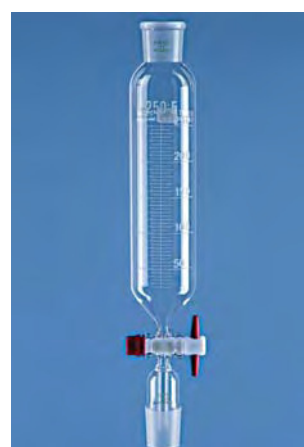

Dropping Funnel, Cylindrical, with PTFE Plug



Dropping Funnel, Cylindrical, with Pressure Equalizing Tube, Glass Plug



Dropping Funnel, Cylindrical, with Pressure Equalizing Tube, PTFE Plug

### Dropping Funnels, Cylindrical, with Pressure Equalizing Tube

Borosilicate glass 3.3. Cylindrical shape, with pressure balance tube. With NS-socket and interchangeable PE stopper, plug with retaining device. With graduation for reading of the approx. volume.

Two types available:

- With solid glass plug
- With PTFE plug

Capacity ml	Socket / Cone NS	Bore mm	Graduation ml	Plug	SP pcs.	Cat. No.
25	14/23	2,5	1	solid	2	4.3522.11
50	14/23	2,5	1	solid	2	4.3528.11
50	29/32	2,5	1	solid	2	4.3528.14
100	14/23	2,5	2	solid	2	4.3537.11
100	29/32	2,5	2	solid	2	4.3537.14
250	29/32	4,0	5	solid	2	4.3549.14
500	29/32	4,0	10	solid	2	4.3558.14
1000	29/32	6,0	20	solid	2	4.3570.14
25	14/23	2,5	1	PTFE	2	4.3722.11
50	14/23	2,5	1	PTFE	2	4.3728.11
50	29/32	2,5	1	PTFE	2	4.3728.14
100	14/23	2,5	2	PTFE	2	4.3737.11
100	29/32	2,5	2	PTFE	2	4.3737.14
250	29/32	4,0	5	PTFE	2	4.3749.14
500	29/32	4,0	10	PTFE	2	4.3758.14
1000	29/32	6,0	20	PTFE	2	4.3770.14

Dropping Funnels



Dropping Funnel, Conical Shape, with Glass Plug



Dropping Funnel, Conical Shape, with PTFE Plug


Dropping Funnels, Conical Shape

DURAN®. Conical shape. With NS-socket and interchangeable PE stopper, plug with retaining device. Without graduation.

Two types available:

- With solid glass plug
- With PTFE plug

Capacity ml	Socket / Cone NS	Bore mm	Plug	SP pcs.	Cat. No.
50	19/26	2,5	solid	1	4.4528.02
100	19/26	2,5	solid	1	4.4537.02
250	29/32	4,0	solid	1	4.4549.04
500	29/32	4,0	solid	1	4.4558.04
1000	29/32	6,0	solid	1	4.4570.04
2000	29/32	6,0	solid	1	4.4573.04
50	19/26	2,5	PTFE	1	4.4728.02
100	19/26	2,5	PTFE	1	4.4737.02
250	29/32	4,0	PTFE	1	4.4749.04
500	29/32	4,0	PTFE	1	4.4758.04
1000	29/32	6,0	PTFE	1	4.4770.04
2000	29/32	6,0	PTFE	1	4.4773.04

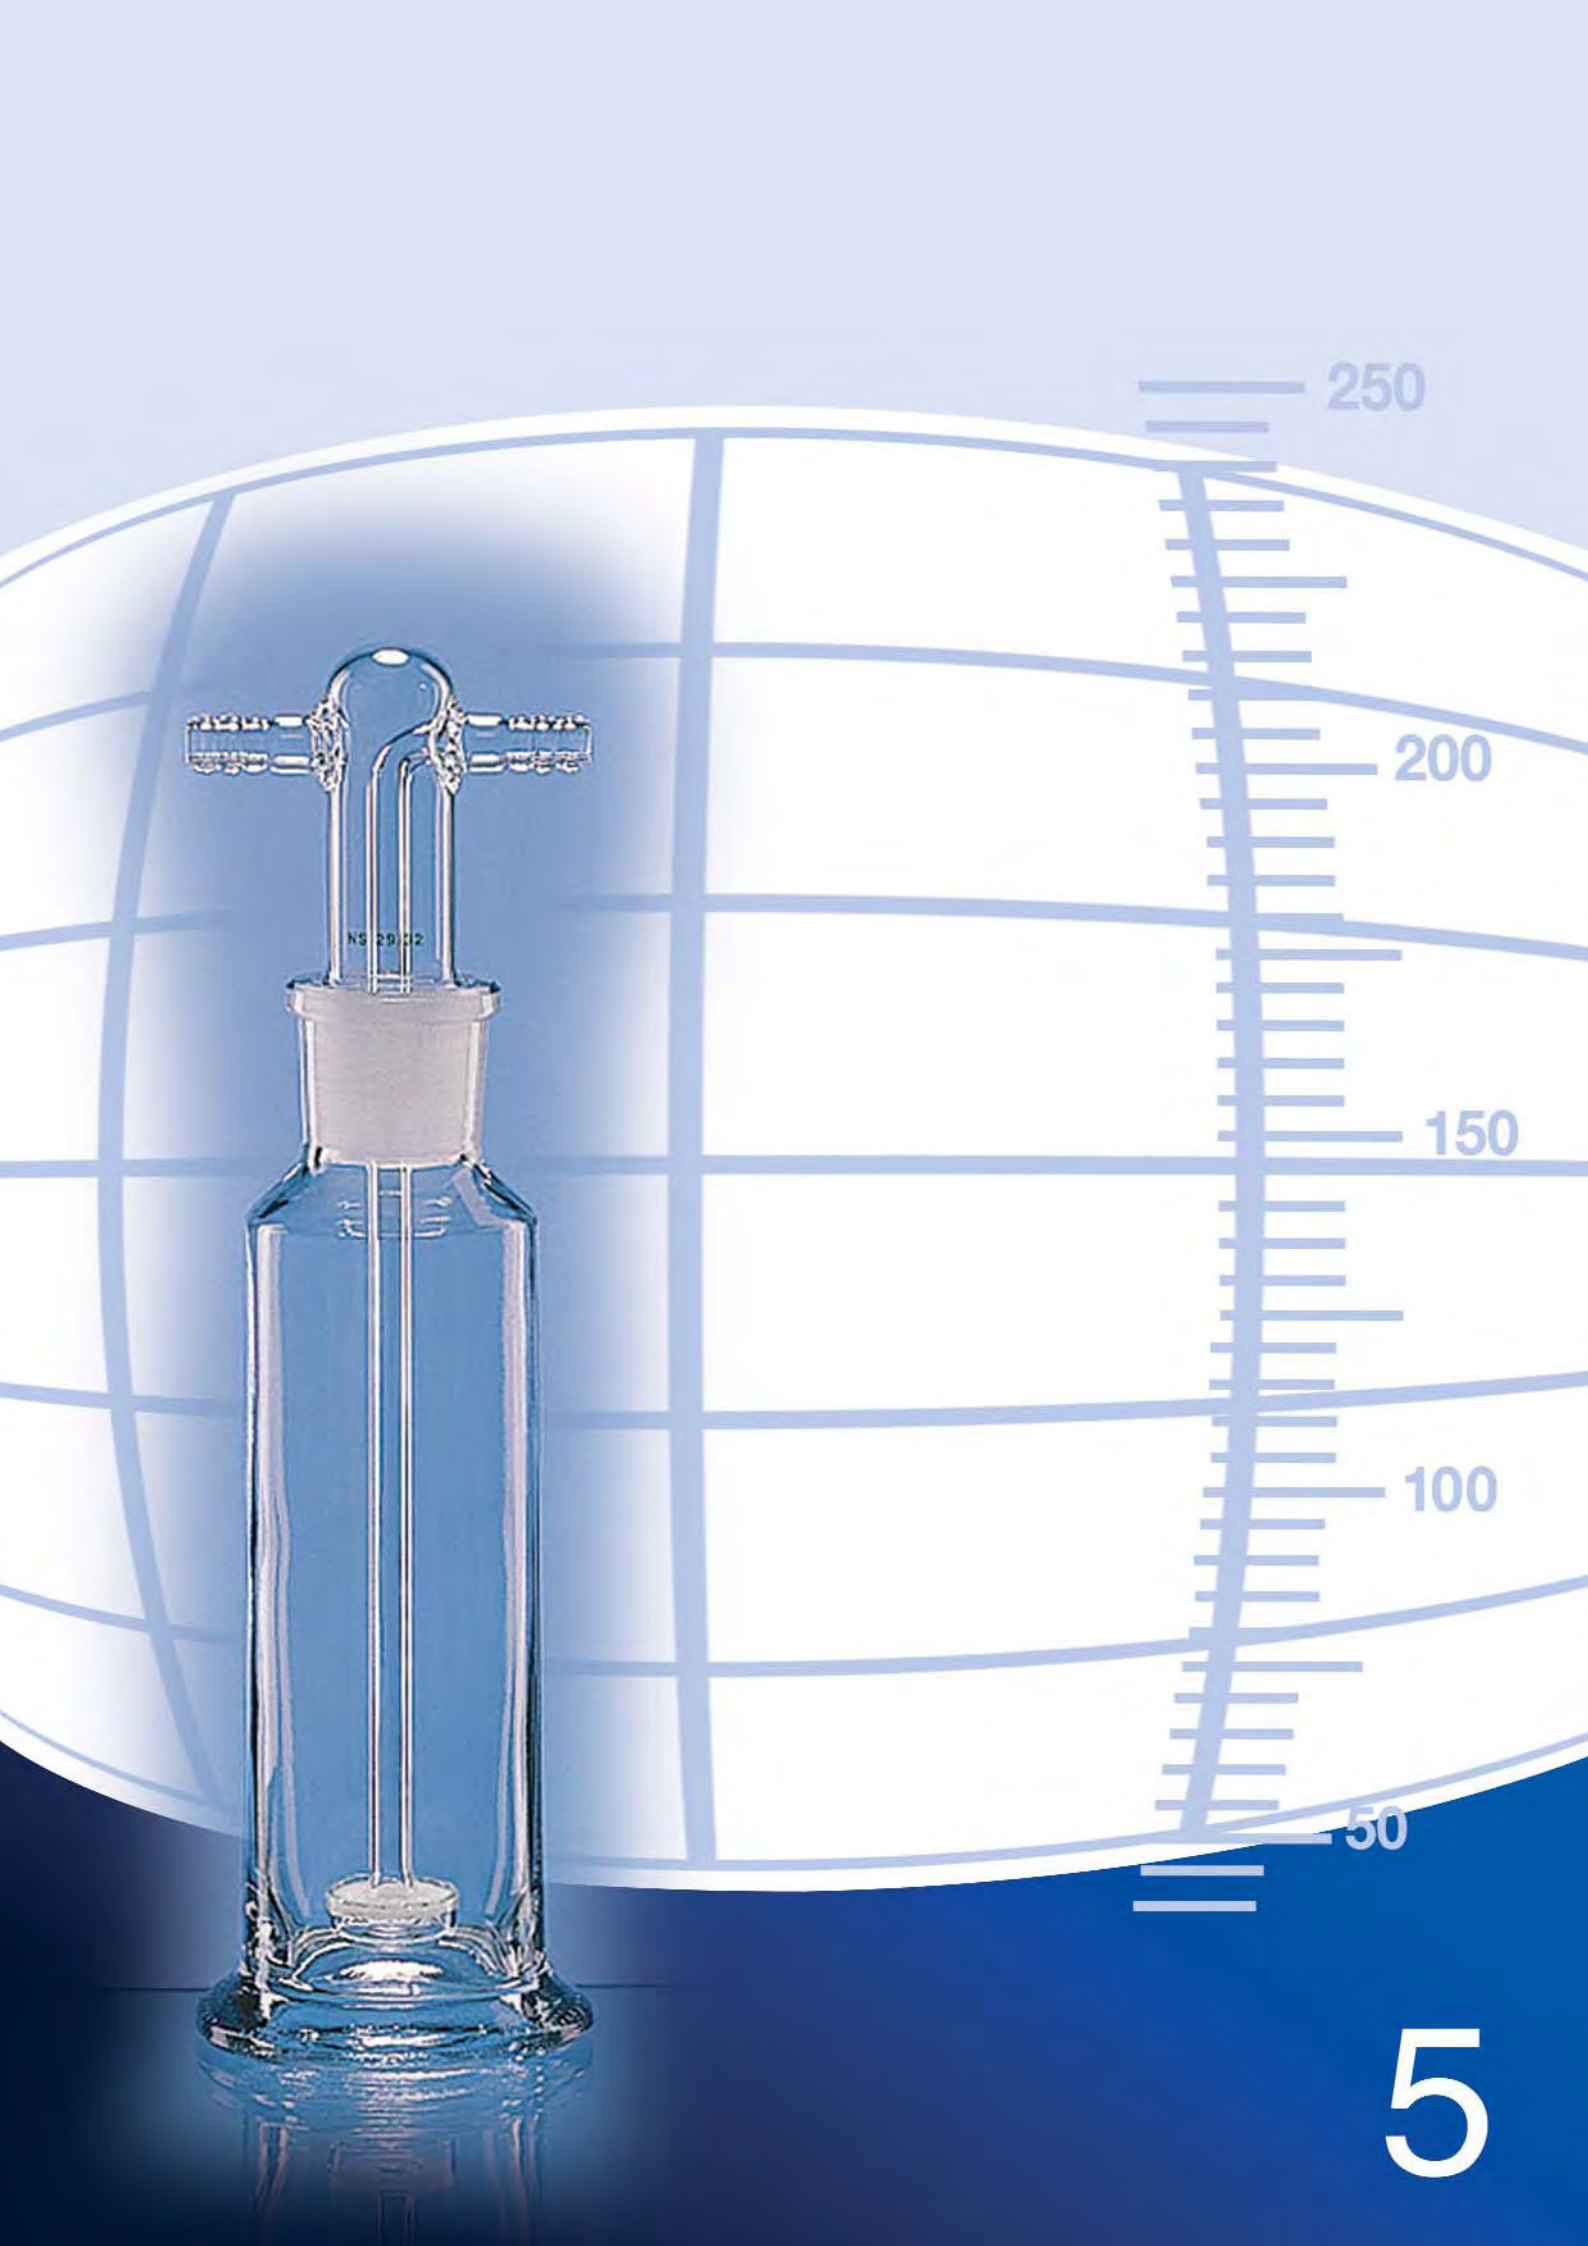

NS 2912

250

200

150

100

50

5

Still Heads

**Multiple Adapters, 2 Necks**

DURAN®. With two sockets and one cone.  
One neck 105° upwards.

Socket vertical	Socket oblique	Cone	SP	Cat. No.
NS	NS	NS	pcs.	
14/23	14/23	14/23	1	5.0001.11
19/26	19/26	19/26	1	5.0002.22
29/32	14/23	29/32	1	5.0004.14
29/32	29/32	29/32	1	5.0004.44



Multi Neck Adapter, 2 Necks



Multi Neck Adapter, 2 Necks

**Multiple Adapters, 2 Necks**

DURAN®. With one socket and two cones.  
One neck 75° downwards.

Cone vertical	Cone oblique	Socket	SP	Cat. No.
NS	NS	NS	pcs.	
14/23	14/23	14/23	1	5.0051.11
29/32	29/32	29/32	1	5.0054.44

**Multiple Adapters, 2 Necks**

DURAN®. With two sockets and one cone.  
With two parallel necks.

Cone	Sockets	SP	Cat. No.
NS	NS	pcs.	
14/23	14/23	1	5.0100.11
19/26	19/26	1	5.0100.22
24/29	19/26	1	5.0100.23
24/29	24/29	1	5.0100.33
29/32	14/23	1	5.0100.14
29/32	29/32	1	5.0100.44



Multi Neck Adapter, 2 Necks



Multi Neck Adapter, 3 Necks

**Multiple Adapters, 3 Necks**

DURAN®. With three sockets and one cone.  
With two parallel necks and one neck 45° upwards.

Cone	Sockets	SP	Cat. No.
NS	NS	pcs.	
14/23	14/23	1	5.0150.11
24/29	19/26	1	5.0150.23
29/32	19/26	1	5.0150.24
24/29	24/29	1	5.0150.33
29/32	29/32	1	5.0150.44

Still Heads

**Bends**

DURAN®. 75° bent. With two cones.

Cones	SP	Cat. No.
NS	pcs.	
14/23	1	5.0200.01
19/26	1	5.0200.02
24/29	1	5.0200.03
29/32	1	5.0200.04



Bend



Bend

**Bends**

DURAN®. 90° bent. With two cones.

Cones	SP	Cat. No.
NS	pcs.	
14/23	1	5.0250.01
19/26	1	5.0250.02
24/29	1	5.0250.03
29/32	1	5.0250.04

**Distilling Heads**

DURAN®. With one socket and two cones at 75°.

For distillation thermometers, 55 mm fitting length.

Socket vertical	Cone vertical	Cone oblique	SP	Cat. No.
NS	NS	NS	pcs.	
14/23	14/23	14/23	1	5.0280.11
14/23	19/26	19/26	1	5.0280.22
14/23	24/29	19/26	1	5.0280.32
14/23	24/29	24/29	1	5.0280.33
14/23	29/32	29/32	1	5.0280.44



Distilling Head



Claisen Head

**Claisen Heads**

DURAN®. With two parallel sockets NS 14/23 and two cones at 75°.

For distillation thermometers, 55 mm fitting length.

Cone vertical	Cone oblique	SP	Cat. No.
NS	NS	pcs.	
14/23	14/23	1	5.0300.11
19/26	19/26	1	5.0300.22
24/29	19/26	1	5.0300.32
24/29	24/29	1	5.0300.33
29/32	14/23	1	5.0300.41
29/32	29/32	1	5.0300.44

Still Heads / Distilling Links



Still Head for Steam Distillation

Still Heads for Steam Distillation			
DURAN®. With two cones, GL 14, for 2000 ml flasks.			
Cone oblique	Flask Conn. Cone	SP	Cat. No.
NS	NS	pcs.	
29/32	29/32	1	5.0330.44



Splash Head, Stutzer, Straight



Splash Head, Stutzer, Bent

Splash Heads to Stutzer				
DURAN®. Two versions available:				
- Straight, with cone and socket				
- Bent with two cones at 75°.				
Splash heads are directly placed onto distillation flasks for separation of drops.				
Cones	Socket	Description	SP	Cat. No.
NS	NS		pcs.	
14/23	14/23	straight	1	5.0350.11
24/29	19/26	straight	1	5.0350.32
29/32	29/32	straight	1	5.0350.44
14/23	14/23	bent	1	5.0370.11
19/26	19/26	bent	1	5.0370.22
24/29	19/26	bent	1	5.0370.32
24/29	24/29	bent	1	5.0370.33
29/32	29/32	bent	1	5.0370.44

5



Distilling Link without Socket

Distilling Links				
DURAN®. Distilling links without condenser, with two vertical cones.				
Without or with socket NS 14/23 for distillation thermometers, 55 mm fitting length.				
Cones	Socket	Jacket Length	SP	Cat. No.
NS	NS	mm	pcs.	
14/23	-	150	1	5.0400.01
19/26	-	200	1	5.0400.02
24/29	-	300	1	5.0400.03
29/32	-	350	1	5.0400.04
14/23	14/23	150	1	5.0470.01
19/26	14/23	200	1	5.0470.02
24/29	14/23	300	1	5.0470.03
29/32	14/23	350	1	5.0470.04



Distilling Link with Socket



## Distilling Links

### Distilling Links with Splash Head

DURAN®. Distilling links with two vertical cones and splash head.


Cones NS	Jacket Length mm	SP pcs.	Cat. No.
14/23	150	1	5.0430.01
19/26	200	1	5.0430.02
24/29	300	1	5.0430.03
29/32	350	1	5.0430.04



Distilling Link with Splash Head



Distilling Link with Liebig Condenser and Nozzle

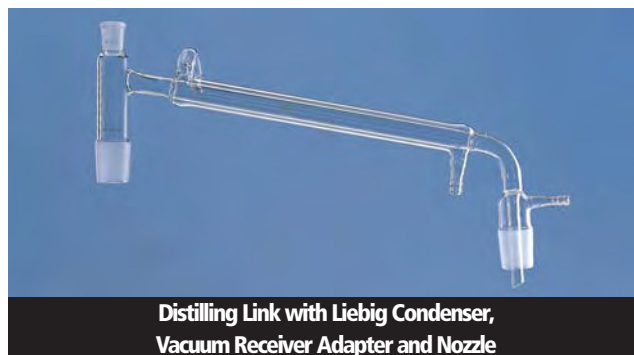

Distilling Link with Liebig Condenser,  
Vacuum Receiver Adapter and Nozzle



Distilling Link with Liebig Condenser and GL Thread



Distilling Link with Liebig Condenser,  
Vacuum Receiver Adapter and GL Thread

### Distilling Links with Liebig Condenser

DURAN®. Distilling links with Liebig condenser and socket NS 14/23 for distillation thermometers, 55 mm fitting length. With cone at the outlet, water connection with nozzle or GL 14.

Cones NS	Water Conn.	Jacket Length mm	SP pcs.	Cat. No.
14/23	nozzle	160	1	5.0502.01
14/23	nozzle	250	1	5.0503.01
29/32	nozzle	250	1	5.0503.04
29/32	nozzle	400	1	5.0504.04
14/23	GL 14	160	1	5.0502.G1
14/23	GL 14	250	1	5.0503.G1
29/32	GL 14	250	1	5.0503.G4
29/32	GL 14	400	1	5.0504.G4

### Distilling Links with Liebig Condenser and Vacuum Receiver Adapter

DURAN®. Distilling links with Liebig condenser and socket NS 14/23, for distillation thermometers, 55 mm fitting length, with vacuum receiver adapter.

Water connection with nozzle or with thread GL 14 and outlet with thread GL 18.

Cones NS	Water Conn.	Vacuum Conn.	Jacket L. mm	SP pcs.	Cat. No.
14/23	nozzle	nozzle	160	1	5.0532.01
14/23	nozzle	nozzle	250	1	5.0533.01
29/32	nozzle	nozzle	250	1	5.0533.04
29/32	nozzle	nozzle	400	1	5.0534.04
14/23	GL 14	GL 18	160	1	5.0532.G1
14/23	GL 14	GL 18	250	1	5.0533.G1
29/32	GL 14	GL 18	250	1	5.0533.G4
29/32	GL 14	GL 18	400	1	5.0534.G1

Distilling Links



Distilling Link, Claisen, with Nozzle



Distilling Link, Claisen, with Vacuum Receiver Adapter and Nozzle



Distilling Link, Claisen, with GL Thread



Distilling Link, Claisen, with Vacuum Receiver Adapter and GL Thread

Distilling Links, Claisen

DURAN®. Distilling links with Liebig condenser and head to Claisen, sockets NS 14/23, for distillation thermometers, 55 mm fitting length. Liebig condenser with straight outlet.

Water connection

- with nozzle
- with GL 14

Cones NS	Water Conn.	Jacket Length mm	SP pcs.	Cat. No.
14/23	nozzle	160	1	5.0552.01
14/23	nozzle	250	1	5.0553.01
29/32	nozzle	250	1	5.0553.04
29/32	nozzle	400	1	5.0554.04
14/23	GL 14	160	1	5.0552.G1
14/23	GL 14	250	1	5.0553.G1
29/32	GL 14	250	1	5.0553.G4
29/32	GL 14	400	1	5.0554.G4

Distilling Links, Claisen

DURAN®. Distilling links with Liebig condenser and head to Claisen, sockets NS 14/23, for distillation thermometers, 55 mm fitting length, with vacuum receiver adapter.

Water connection

- with nozzle
- with thread GL 14 and outlet with thread GL 18

Cones NS	Water Conn.	Vacuum Conn.	Jacket Length mm	SP pcs.	Cat. No.
14/23	nozzle	nozzle	160	1	5.0572.01
14/23	nozzle	nozzle	250	1	5.0573.01
29/32	nozzle	nozzle	250	1	5.0573.04
29/32	nozzle	nozzle	400	1	5.0574.04
14/23	GL 14	GL 18	160	1	5.0572.G1
14/23	GL 14	GL 18	250	1	5.0573.G1
29/32	GL 14	GL 18	250	1	5.0573.G4
29/32	GL 14	GL 18	400	1	5.0574.G4

Distilling Links for Short Path Distillation


DURAN®. Compact design of condenser and vacuum connection guarantee a short path for the condensates. Connections GL 14.

Cones NS	Socket NS	SP pcs.	Cat. No.
14/23	14/23	1	5.0580.01



Distilling Link for Short Path Distillation


Gas Inlet Tubes

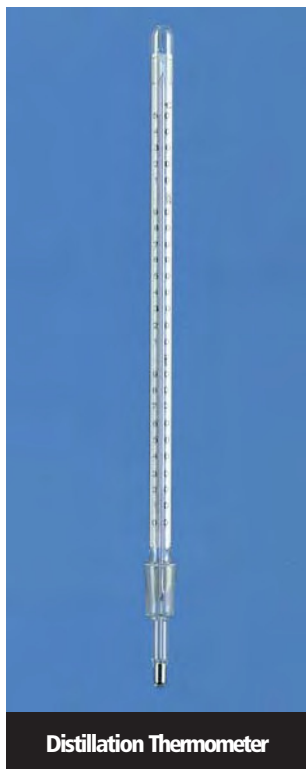

Distillation Thermometer



Gas Inlet Tubes

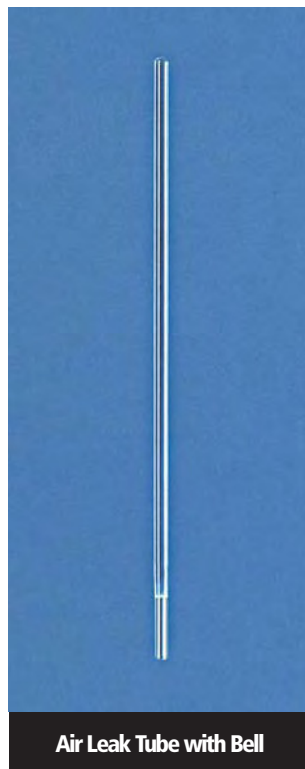

Air Leak Tube with Bell



Gas Inlet Tube with Valve Stopcock

Distillation Thermometers

Thermometers with cone NS 14/23. Top end melted round. Frosted glass scale with black graduation. With blue reflecting Hg-column, suitable for certification.

Note:

fitting length = distance from the top of the joint to the bottom of the mercury reservoir

Range °C	Graduation °C	Fitting Length mm	SP pcs.	Cat. No.
0-150	0,5	55	1	5.0650.01
0-150	0,5	70	1	5.0650.02
0-150	0,5	85	1	5.0650.03
0-250	1	55	1	5.0650.04
0-250	1	70	1	5.0650.05
0-250	1	85	1	5.0650.06
0-360	1	55	1	5.0650.07
0-360	1	70	1	5.0650.08
0-360	1	85	1	5.0650.09

Gas Inlet Tubes / Air Leak Tubes, Straight

DURAN®. With cone. Can be used for cutting or capillarising the tube to the length needed.

Available in two versions

- straight, fitting length 200 mm
- 90° bent, fitting length 250 mm

Cone NS	Description	SP pcs.	Cat. No.
14/23	straight	1	5.0800.01
19/26	straight	1	5.0800.02
24/29	straight	1	5.0800.03
29/32	straight	1	5.0800.04
14/23	bent	1	5.0830.01
19/26	bent	1	5.0830.02
24/29	bent	1	5.0830.03
29/32	bent	1	5.0830.04

Gas Inlet Tubes with Valve Stopcock

DURAN®. With valve stopcock for dosing and 90° nozzle. Tube length from top of the joint approx. 250 mm.

Cone NS	SP pcs.	Cat. No.
14/23	1	5.0860.01

Air Leak Tubes

DURAN®. With bell. To avoid boiling splash.

Size approx. mm	SP pcs.	Cat. No.
180 x 4	1	5.0810.00



Adapter, Straight



Adapter, Bent

### Adapters, Straight

Adapters with cone and straight nozzle.

Cone NS	SP pcs.	Cat. No.
14/23	1	5.0920.01
19/26	1	5.0920.02
24/29	1	5.0920.03
29/32	1	5.0920.04

### Adapters, Bent

Adapters with cone and 90° bent nozzle.

Cone NS	SP pcs.	Cat. No.
14/23	1	5.0950.01
19/26	1	5.0950.02
24/29	1	5.0950.03
29/32	1	5.0950.04

5



Adapter with NS-Stopcock,  
Straight



Adapter with NS-Stopcock,  
Bent

### Adapters with NS-Stopcock, Straight

Adapters with cone and straight nozzle.

With NS stopcock with solid glass plug, bore 2,5 mm.

Cone NS	SP pcs.	Cat. No.
14/23	1	5.0970.01
19/26	1	5.0970.02
24/29	1	5.0970.03
29/32	1	5.0970.04

### Adapters with NS-Stopcock, Bent

Adapters with cone and 90° bent nozzle.

With NS stopcock with solid glass plug, bore 2,5 mm.

Cone NS	SP pcs.	Cat. No.
14/23	1	5.0980.01
19/26	1	5.0980.02
24/29	1	5.0980.03
29/32	1	5.0980.04



Adapter, Straight



Adapter, Bent

**Adapters, Straight**

Adapters with socket and straight nozzle.

Socket	SP	Cat. No.
NS	pcs.	
14/23	1	5.1010.01
19/26	1	5.1010.02
24/29	1	5.1010.03
29/32	1	5.1010.04

**Adapters, Bent**

Adapters with socket and 90° bent nozzle.

Socket	SP	Cat. No.
NS	pcs.	
14/23	1	5.1030.01
19/26	1	5.1030.02
24/29	1	5.1030.03
29/32	1	5.1030.04



Adapter with NS Stopcock, Bent

**Adapters with NS Stopcock, Bent**

Adapters with socket and 90° bent nozzle.

With NS stopcock with solid glass plug, bore 2,5 mm.

Socket	SP	Cat. No.
NS	pcs.	
14/23	1	5.1050.01
19/26	1	5.1050.02
24/29	1	5.1050.03
29/32	1	5.1050.04



Small Flange, Male, with Nozzle



Small Flange, Female, with Nozzle


**Small Flanges, KF, with Nozzle**

Description	KF	Nozzle	SP	Cat. No.
			pcs.	
Small flange, socket	15	10	1	5.1061.10
Small flange, socket	15	16	1	5.1061.16
Small flange, socket	25	16	1	5.1062.16
Small flange, ball	15	10	1	5.1071.10
Small flange, ball	15	16	1	5.1071.16
Small flange, ball	25	16	1	5.1072.16


**Small Flanges with Thread, Steel**

KF-socket, with thread M 16 x 1.


Description	KF	Thread	SP	Cat. No.
			pcs.	
Small flange, socket	15	M16 x 1	1	5.1081.10
Small flange, socket	25	M16 x 1	1	5.1082.16

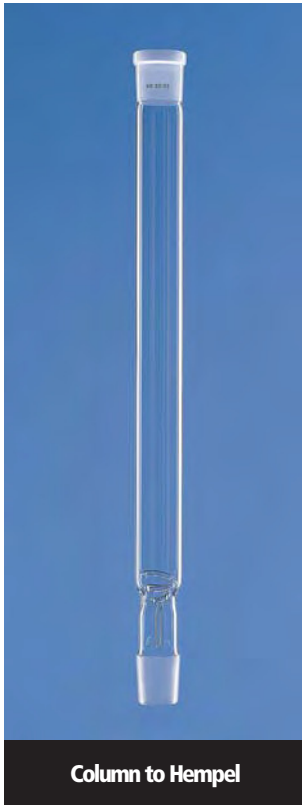

Column to Hempel

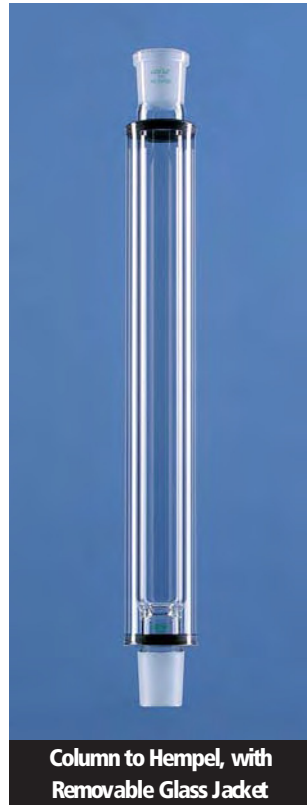

Column to Hempel, with Removable Glass Jacket

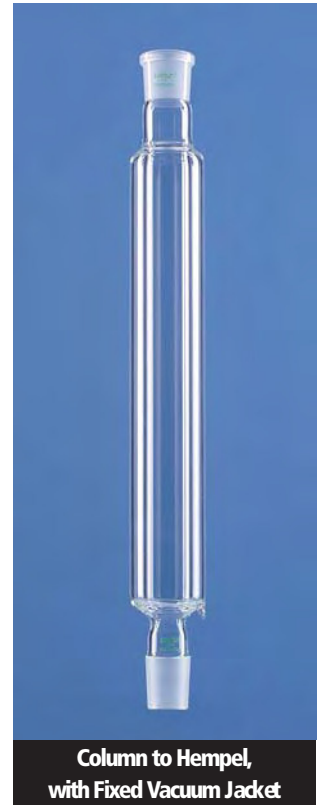

Column to Hempel, with Fixed Vacuum Jacket

**Columns to Hempel**

DURAN®. Without oder with removable glass jacket. For packings like glass rings, Raschig, or glass beads.

Eff. L mm	Socket/Cone NS	Description	SP pcs.	Cat. No.
200	14/23	without jacket	1	5.1152.01
300	14/23	without jacket	1	5.1153.01
300	24/29	without jacket	1	5.1153.03
300	29/32	without jacket	1	5.1153.04
500	24/29	without jacket	1	5.1155.03
500	29/32	without jacket	1	5.1155.04
800	24/29	without jacket	1	5.1158.03
800	29/32	without jacket	1	5.1158.04
200	14/23	with jacket	1	5.1172.01
300	14/23	with jacket	1	5.1173.01
300	29/32	with jacket	1	5.1173.04
500	29/32	with jacket	1	5.1175.04
800	29/32	with jacket	1	5.1178.04

**Columns to Hempel with Vacuum Jacket**

DURAN®. With fixed vacuum jacket. For packings like glass rings, Raschig, or glass beads.

Eff. L mm	Socket/Cone NS	SP pcs.	Cat. No.
200	14/23	1	5.1192.01
300	29/32	1	5.1193.04
500	29/32	1	5.1195.04
800	29/32	1	5.1198.04

**Glass Beads, Solid**


Soda-lime glass.

Ø mm	SP kg	Cat. No.
2	1	5.1240.02
3	1	5.1240.03
4	1	5.1240.04
5	1	5.1240.05
6	1	5.1240.06
8	1	5.1240.08


**Glass Rings, Raschig**

Soda-lime glass.


Ø x H mm	SP kg	Cat. No.
3 x 3	1	5.1270.03
4 x 4	1	5.1270.04
5 x 5	1	5.1270.05
6 x 6	1	5.1270.06
8 x 8	1	5.1270.08
10 x 10	1	5.1270.10

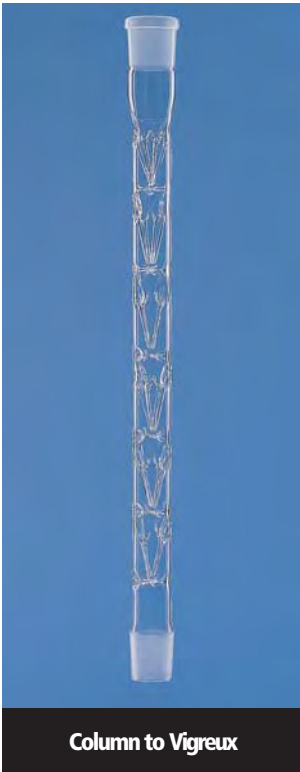

Column to Vigreux

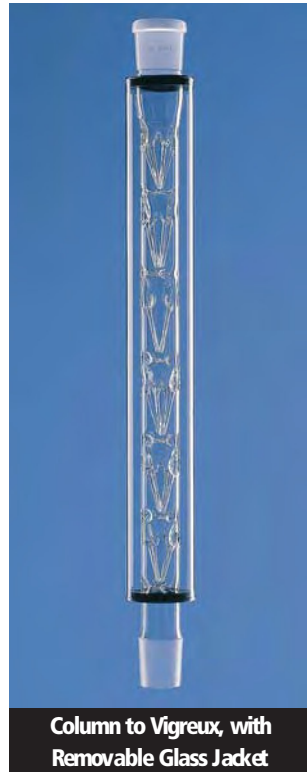

Column to Vigreux, with Removable Glass Jacket

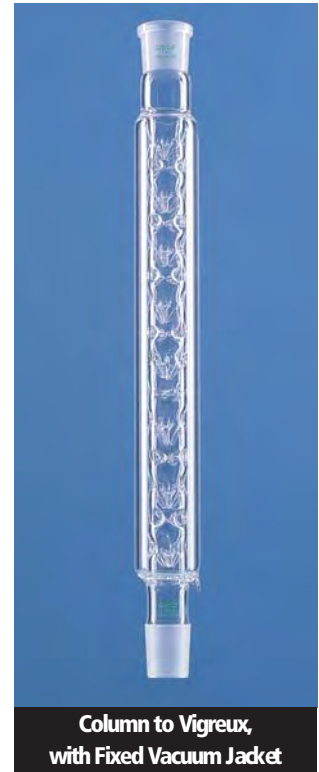

Column to Vigreux, with Fixed Vacuum Jacket

### Columns to Vigreux

DURAN®. Without oder with removable glass jacket. Alterating horizontal and lateral pushed punts.

Eff. Length mm	Socket / Cone NS	Description	SP pcs.	Cat. No.
200	14/23	without jacket	1	5.1302.01
300	14/23	without jacket	1	5.1303.01
300	24/29	without jacket	1	5.1303.03
300	29/32	without jacket	1	5.1303.04
600	24/29	without jacket	1	5.1305.03
600	29/32	without jacket	1	5.1305.04
200	14/23	with jacket	1	5.1332.01
300	14/23	with jacket	1	5.1333.01
300	24/29	with jacket	1	5.1333.03
300	29/32	with jacket	1	5.1333.04
600	24/29	with jacket	1	5.1335.03
600	29/32	with jacket	1	5.1335.04

### Columns to Vigreux


DURAN®. With fixed vacuum jacket

Eff. Length mm	Socket / Cone NS	SP pcs.	Cat. No.
200	14/23	1	5.1362.01
300	14/23	1	5.1363.01
300	24/29	1	5.1363.03
300	29/32	1	5.1363.04
600	24/29	1	5.1365.03
600	29/32	1	5.1365.04

### Column Heads with Valve Stopcock

DURAN®. With PTFE valve for easy and accurate reflux adjustment. Thermometer connection NS 14/23 for thermometers with 55 mm fitting length.

Column NS	Receiver NS	SP pcs.	Cat. No.
14/23	14/23	1	5.1701.11
29/32	29/32	1	5.1701.44

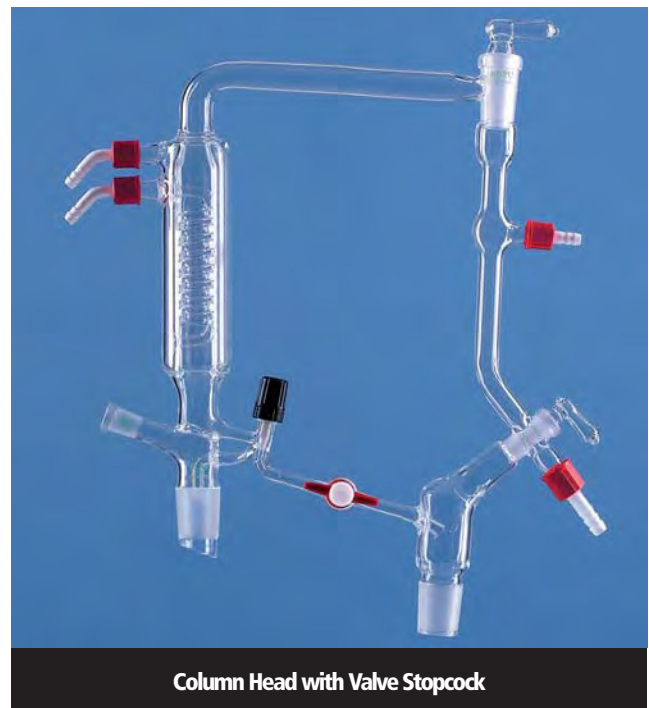


Column Head with Valve Stopcock


Condensers



Air Condenser without Jacket

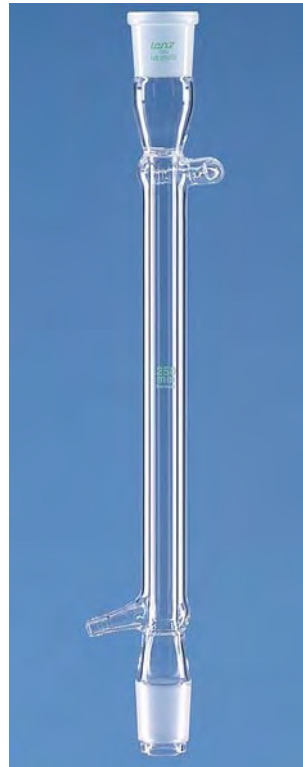

Liebig Condenser with Nozzle

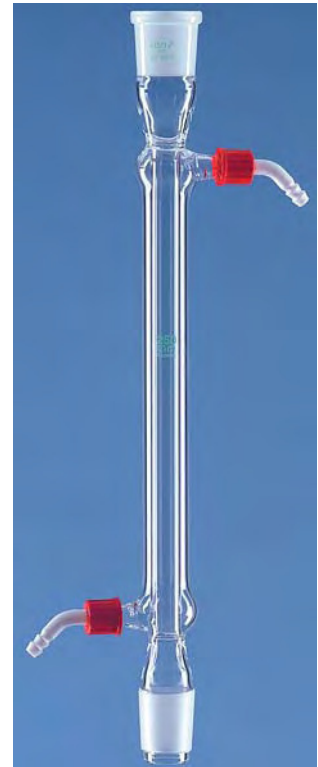

Liebig Condenser with GL Thread

Air Condensers without Jacket

DURAN®. For condensing vapours. With cone and drain ring.

Cone NS	Length mm	SP pcs.	Cat. No.
14/23	700	1	5.2000.01
29/32	1000	1	5.2000.04

Liebig Condensers


DURAN®. DIN 12576. For condensing vapours. With fixed jacket, cone and socket. Water connection with nozzle or thread GL 14, with two threaded plastic nozzles.

Socket/Cone NS	Jacket L mm	Water Conn.	Ausf.	SP pcs.	Cat. No.
14/23	160	nozzle	DIN	1	5.2102.01
19/26	160	nozzle	DIN	1	5.2102.02
14/23	250	nozzle	(1)	1	5.2103.01
19/26	250	nozzle	DIN	1	5.2103.02
24/29	250	nozzle	(1)	1	5.2103.03
29/32	250	nozzle	DIN	1	5.2103.04
14/23	400	nozzle	(1)	1	5.2104.01
19/26	400	nozzle	(1)	1	5.2104.02
24/29	400	nozzle	(1)	1	5.2104.03
29/32	400	nozzle	DIN	1	5.2104.04
29/32	500	nozzle	(1)	1	5.2105.04
29/32	750	nozzle	(1)	1	5.2107.04
14/23	160	GL 14	DIN	1	5.2102.G1
19/26	250	GL 14	DIN	1	5.2103.G2
14/23	250	GL 14	(1)	1	5.2103.G1
19/26	250	GL 14	DIN	1	5.2103.G2
24/29	250	GL 14	(1)	1	5.2103.G3
29/32	250	GL 14	DIN	1	5.2103.G4
14/23	400	GL 14	(1)	1	5.2104.G1
19/26	400	GL 14	(1)	1	5.2104.G2
24/29	400	GL 14	(1)	1	5.2104.G3
29/32	400	GL 14	DIN	1	5.2104.G4
29/32	500	GL 14	(1)	1	5.2105.G4
29/32	750	GL 14	(1)	1	5.2107.G4


(1) in addition to DIN-range




Condensers

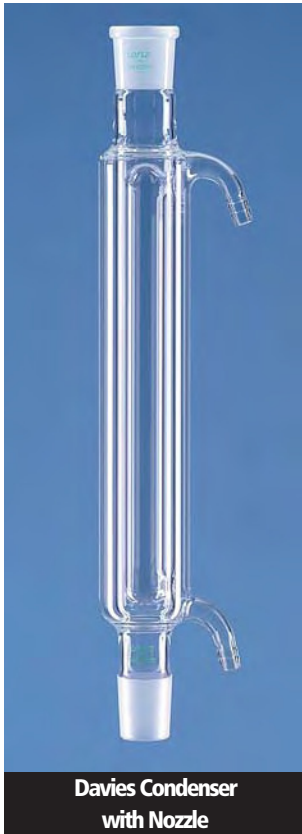


Davies Condenser with Nozzle

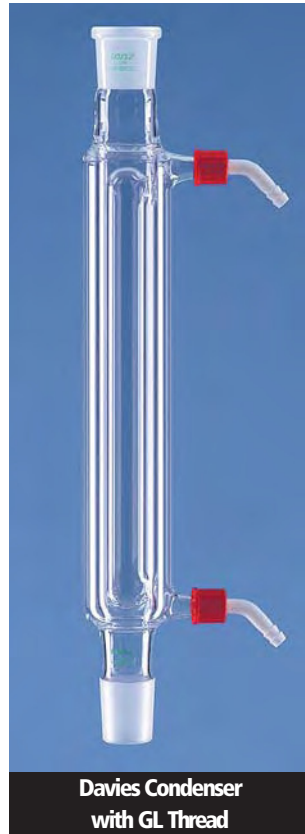

Davies Condenser with GL Thread

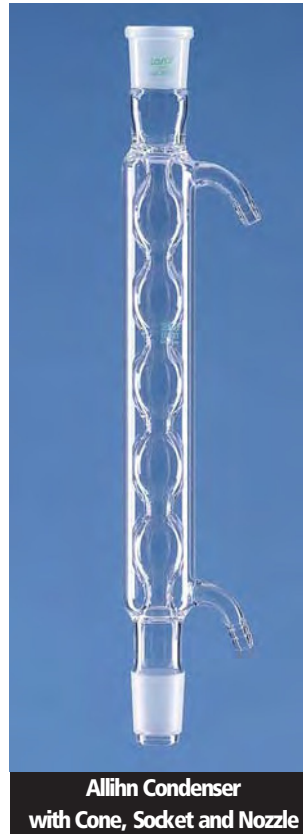

Allihn Condenser with Cone, Socket and Nozzle

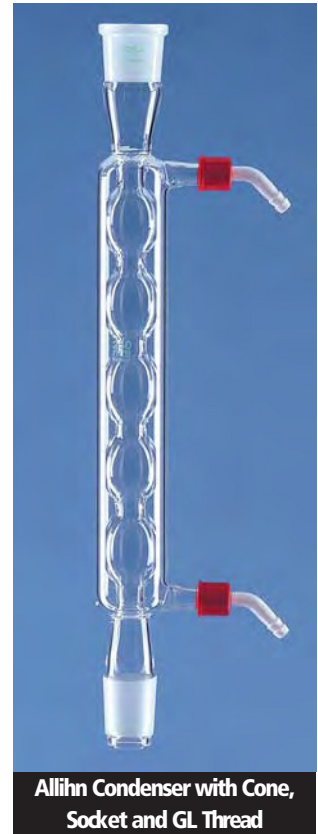

Allihn Condenser with Cone, Socket and GL Thread

Davies Condensers

DURAN®. For condensing vapours. With double sized cooling area, cone and socket. Water connection with nozzle or thread GL 14, with two threaded plastic nozzles.

Socket/Cone NS	Jacket L. mm	Water Conn.	SP pcs.	Cat. No.
24/29	250	nozzle	1	5.2153.03
29/32	250	nozzle	1	5.2153.04
24/29	400	nozzle	1	5.2154.03
29/32	400	nozzle	1	5.2154.04
24/29	250	GL 14	1	5.2153.G3
29/32	250	GL 14	1	5.2153.G4
24/29	400	GL 14	1	5.2154.G3
29/32	400	GL 14	1	5.2154.G4

Allihn Condensers

DURAN®. DIN 12581. For condensing vapours. With cone and socket, water connection with nozzle or thread GL 14, with two thread plastic nozzles.


Socket / Cone NS	Jacket Length mm	No. of Balls	Water Conn.	Desc.	SP pcs.	Cat. No.
14/23	160	5	nozzle	(1)	1	5.2232.01
19/26	160	5	nozzle	DIN	1	5.2232.02
24/29	160	5	nozzle	(1)	1	5.2232.03
29/32	160	5	nozzle	(1)	1	5.2232.04
14/23	250	5	nozzle	(1)	1	5.2233.01
19/26	250	5	nozzle	(1)	1	5.2233.02
24/29	250	5	nozzle	(1)	1	5.2233.03
29/32	250	5	nozzle	DIN	1	5.2233.04
24/29	400	8	nozzle	(1)	1	5.2234.03
29/32	400	8	nozzle	(1)	1	5.2234.04
29/32	500	10	nozzle	(1)	1	5.2235.04
14/23	160	5	GL 14	(1)	1	5.2232.G1
19/26	160	5	GL 14	DIN	1	5.2232.G2
24/29	160	5	GL 14	(1)	1	5.2232.G3
29/32	160	5	GL 14	(1)	1	5.2232.G4
14/23	250	5	GL 14	(1)	1	5.2233.G1
19/26	250	5	GL 14	(1)	1	5.2233.G2
24/29	250	5	GL 14	(1)	1	5.2233.G3
29/32	250	5	GL 14	DIN	1	5.2233.G4
24/29	400	8	GL 14	(1)	1	5.2234.G3
29/32	400	8	GL 14	(1)	1	5.2234.G4
29/32	500	10	GL 14	(1)	1	5.2235.G4

(1) in addition to DIN-range


Condensers




Allihn Condenser  
with Cone and Nozzle

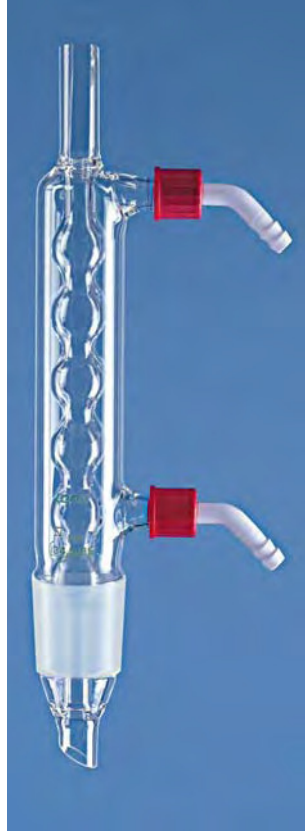

Allihn Condenser  
with Cone and GL Thread

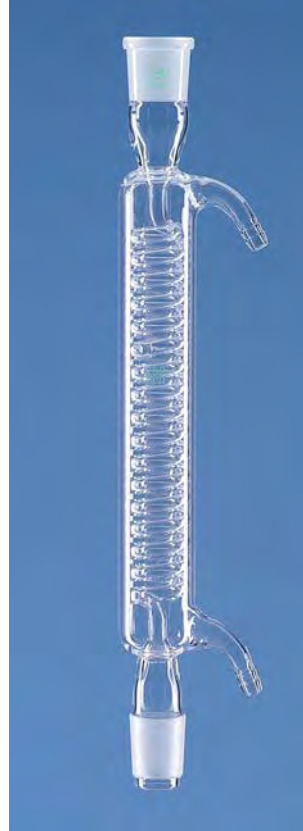

Spiral-condenser  
with Nozzle

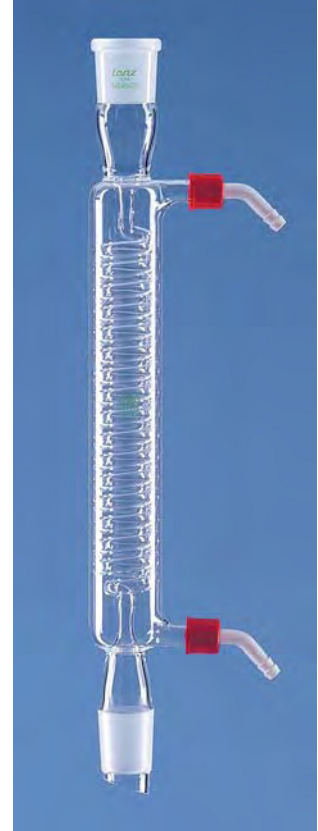

Spiral-condenser  
with GL Thread

Allihn Condensers

DURAN®. For condensing vapours. With cone, water connection with nozzle or thread GL 14, with two thread plastic nozzles.


Cone NS	Extractor ml	Water Conn.	SP pcs.	Cat. No.
29/32	30	Nozzle	1	5.2260.04
34/35	70	Nozzle	1	5.2260.05
45/40	100-250	Nozzle	1	5.2260.06
29/32	30	GL 14	1	5.2260.G4
34/35	70	GL 14	1	5.2260.G5
45/40	100-250	GL 14	1	5.2260.G6

Spiral-condensers


DURAN®. For cooling condensates. With cone and socket. Water connection with nozzle or thread GL 14, with two threaded plastic nozzles.

Socket/Cone NS	Jacket L mm	Water Conn.	SP pcs.	Cat. No.
14/23	160	nozzle	1	5.2332.01
29/32	250	nozzle	1	5.2333.04
29/32	400	nozzle	1	5.2334.04
29/32	500	nozzle	1	5.2335.04
14/23	160	GL 14	1	5.2332.G1
29/32	250	GL 14	1	5.2333.G4
29/32	400	GL 14	1	5.2334.G4
29/32	500	GL 14	1	5.2335.G4

KühlerCondensers

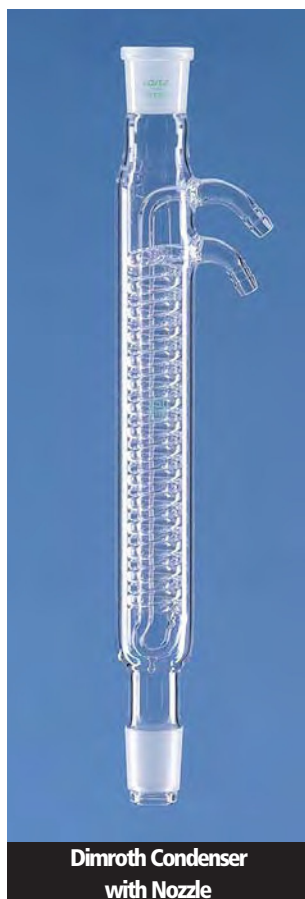


Dimroth Condenser with Nozzle

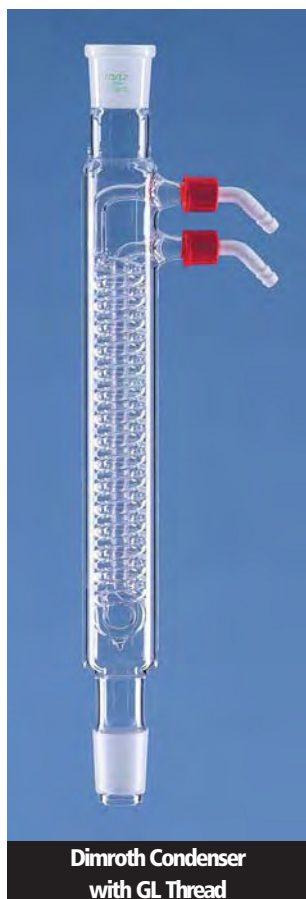

Dimroth Condenser with GL Thread



Dimroth Condenser with Cone, with Nozzle

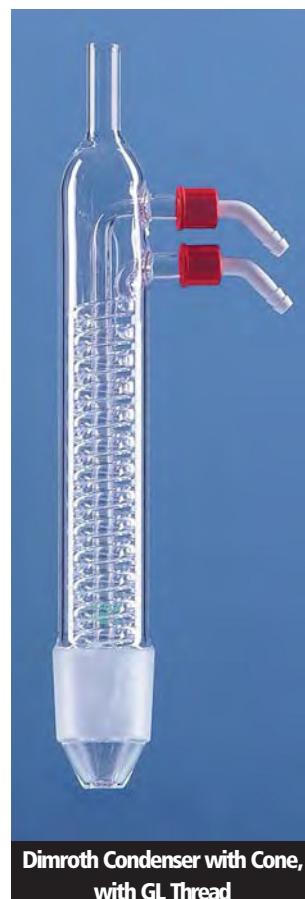

Dimroth Condenser with Cone, with GL Thread

Dimroth Condensers

DURAN®. DIN 12591. For condensing vapours. With cone and socket. Water connection with nozzle or thread GL 14, with two threaded plastic nozzles.


Socket/Cone NS	Jacket L. mm	Water Conn.	Desc.	SP pcs.	Cat. No.
14/23	160	nozzle	(1)	1	5.2402.01
19/26	160	nozzle	(1)	1	5.2402.02
14/23	250	nozzle	(1)	1	5.2403.01
19/26	250	nozzle	(1)	1	5.2403.02
24/29	250	nozzle	(1)	1	5.2403.03
29/32	250	nozzle	DIN	1	5.2403.04
45/40	250	nozzle	(1)	1	5.2403.06
29/32	400	nozzle	DIN	1	5.2404.04
45/40	400	nozzle	(1)	1	5.2404.06
14/23	160	GL 14	(1)	1	5.2402.G1
19/26	160	GL 14	(1)	1	5.2402.G2
14/23	250	GL 14	(1)	1	5.2403.G1
19/26	250	GL 14	(1)	1	5.2403.G2
24/29	250	GL 14	(1)	1	5.2403.G3
29/32	250	GL 14	DIN	1	5.2403.G4
45/40	250	GL 14	(1)	1	5.2403.G6
29/32	400	GL 14	DIN	1	5.2404.G4
45/40	400	GL 14	(1)	1	5.2404.G6

(1) in addition to DIN-range


Dimroth Condensers with Cone

DURAN®. For extractors. For condensing vapours. With cone. Water connection with nozzle or thread GL 14, with two threaded plastic nozzles.

Cone NS	Extractor ml	Water Conn.	SP pcs.	Cat. No.
29/32	30	nozzle	1	5.2460.04
34/35	70	nozzle	1	5.2460.05
45/40	100-250	nozzle	1	5.2460.06
60/46	300-500	nozzle	1	5.2460.07
71/51	1000	nozzle	1	5.2460.08
29/32	30	GL 14	1	5.2460.G4
34/35	70	GL 14	1	5.2460.G5
45/40	100-250	GL 14	1	5.2460.G6
60/46	300-500	GL 14	1	5.2460.G7
71/51	1000	GL 14	1	5.2460.G8

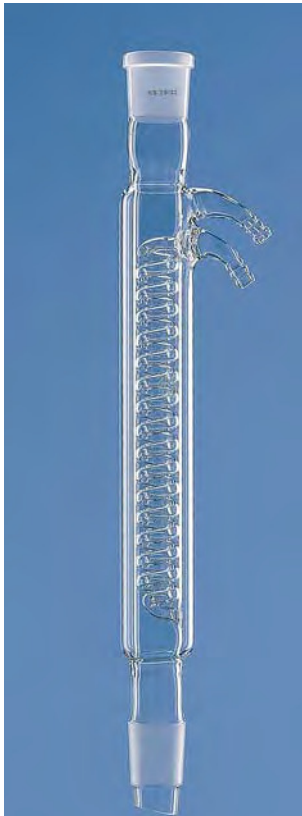

Coil Condenser (double walled) with Nozzle

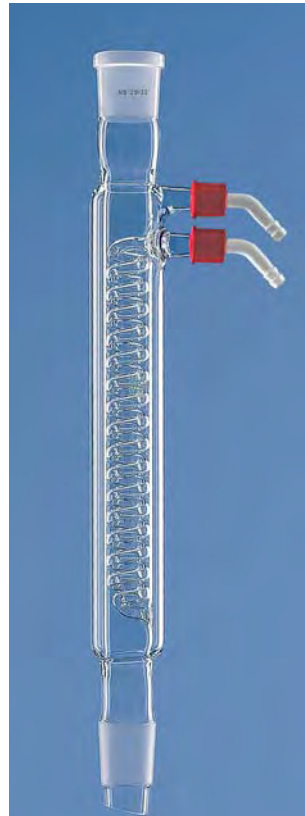

Coil Condenser (double walled) with GL Thread



High Efficient Condenser with 4 Coils

### Coil Condensers (double walled)

DURAN®. DIN 12593. For condensing vapours. With cooling coil and jacket, with cone and socket. Water connection with nozzle or thread GL 14, with two threaded plastic nozzles.

Socket/Cone NS	Jacket L. mm	Water Conn.	Ausf. (1)	SP pcs.	Cat. No.
14/23	160	nozzle	(1)	1	5.2502.01
29/32	160	nozzle	DIN	1	5.2502.04
24/29	250	nozzle	(1)	1	5.2503.03
29/32	250	nozzle	DIN	1	5.2503.04
29/32	400	nozzle	DIN	1	5.2504.04
29/32	500	nozzle	(1)	1	5.2505.04
14/23	160	GL 14	(1)	1	5.2502.G1
29/32	160	GL 14	DIN	1	5.2502.G4
24/29	250	GL 14	(1)	1	5.2503.G3
29/32	250	GL 14	DIN	1	5.2503.G4
29/32	400	GL 14	DIN	1	5.2504.G4
29/32	500	GL 14	(1)	1	5.2505.G4

(1) in addition to DIN-range

### High efficient Condensers with 4 Coils

DURAN®. With 4 cooling coils, cooling area 3000 cm<sup>2</sup>, jacket length 300 mm. Available with cone and socket NS 45/40 and water connections with nozzle or ball and socket KF 50 and water connections ball member KF 15.

Description	Jacket L. mm	Water Conn.	SP pcs.	Cat. No.
NS 45/40	300	nozzle	1	5.2550.00
KF 50	300	KF 15	1	5.2550.50

Delivery Adapters



Delivery Adapter, Bent,  
with Short Tube



Delivery Adapter, Bent,  
with Long Tube

Delivery Adapters, Bent			
DURAN®. With socket and bent tube, 105°, with short tube.			
Socket	Tube Length	SP	Cat. No.
NS	mm	pcs.	
14/23	65	1	5.2600.01
19/26	65	1	5.2600.02
24/29	65	1	5.2600.03
29/32	65	1	5.2600.04

Delivery Adapters, Bent			
DURAN®. With socket and bent tube, 105°, with long tube.			
Socket	Tube Length	SP	Cat. No.
NS	mm	pcs.	
14/23	190	1	5.2630.01
19/26	200	1	5.2630.02
24/29	200	1	5.2630.03
29/32	200	1	5.2630.04



Delivery Adapter, Bent,  
with Drain Tip



Delivery Adapter, Straight,  
with Vacuum Tube

Delivery Adapters, Bent		
DURAN®. With cone and socket, bent, 105°, with drain tip.		
Socket	SP	Cat. No.
NS	pcs.	
14/23	1	5.2650.01
19/26	1	5.2650.02
24/29	1	5.2650.03
29/32	1	5.2650.04

Delivery Adapters, Straight		
DURAN®. With cone and socket, straight, with vacuum tube.		
Socket	SP	Cat. No.
NS	pcs.	
14/23	1	5.2660.01
19/26	1	5.2660.02
24/29	1	5.2660.03
29/32	1	5.2660.04

Delivery Adapters / Receiver Adapters



Delivery Adapter, Bent,  
with Ventilation

Delivery Adapters, Bent

DURAN®. For high boiling liquids, with cone and socket, bent, 105°, with ventilation.

Socket / Cone NS	SP pcs.	Cat. No.
14/23	1	5.2680.01
19/26	1	5.2680.02
24/29	1	5.2680.03
29/32	1	5.2680.04

5



Receiver Adapter, Straight,  
with Nozzle



Receiver Adapter, Straight,  
with GL Thread



Receiver Adapter, Bent,  
with Nozzle



Receiver Adapter, Bent,  
with GL Thread

Receiver Adapters, Straight

DURAN®. With cone and socket, straight. With drain tip and vacuum connection with nozzle or thread GL18.

Socket / Cone NS	Vacuum Conn.	SP pcs.	Cat. No.
14/23	nozzle	1	5.2720.01
19/26	nozzle	1	5.2720.02
24/29	nozzle	1	5.2720.03
29/32	nozzle	1	5.2720.04
14/23	GL 18	1	5.2720.G1
19/26	GL 18	1	5.2720.G2
24/29	GL 18	1	5.2720.G3
29/32	GL 18	1	5.2720.G4

Receiver Adapters, Bent

DURAN®. With cone and socket, bent, 105°. With drain tip and vacuum connection with nozzle or thread GL18.

Socket / Cone NS	Vacuum Conn.	SP pcs.	Cat. No.
14/23	nozzle	1	5.2750.01
19/26	nozzle	1	5.2750.02
24/29	nozzle	1	5.2750.03
29/23	nozzle	1	5.2750.04
14/23	GL 18	1	5.2750.G1
19/26	GL 18	1	5.2750.G2
24/29	GL 18	1	5.2750.G3
29/32	GL 18	1	5.2750.G4

Distilling Receivers



Distilling Receiver to Bredt, Bent




Distilling Receiver to Bredt, Straight

**Distilling Receivers to Bredt, Bent**  
 DURAN®. With 4 flasks NS 14/23. With bent adapter and vacuum connection GL 18.

Socket lateral	Socket / Cone vertical	Flasks	SP	Cat. No.
NS	NS	ml	pcs.	
14/23	19/26	50	1	5.2800.01
29/32	29/32	100	1	5.2800.04

**Distilling Receivers to Bredt, Straight**  
 DURAN®. With 4 flasks NS 14/23. With straight adapter and vacuum connection GL 18.

Socket top	Cone / Socket vertical	Flasks	SP	Cat. No.
NS	NS	ml	pcs.	
14/23	19/26	50	1	5.2850.01
29/32	29/32	100	1	5.2850.04
29/32	29/32	250	1	5.2850.05

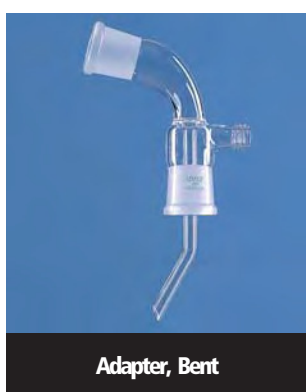

Adapter, Bent



Adapter, Straight



Distributor to Bredt

**Adapters for Distilling Receivers to Bredt**  
 DURAN®. With two sockets, 105° bent, or straight, with vacuum connection GL 18.

Socket lateral	Socket down	Description	SP	Cat. No.
NS	NS		pcs.	
14/23	19/26	bent	1	5.2851.01
29/32	29/32	bent	1	5.2851.04
14/23	19/26	straight	1	5.2851.06
29/32	29/32	straight	1	5.2851.08


**Distributors for Distilling Receivers to Bredt**  
 DURAN®. With 4 cones NS 14/23 for round bottom flasks up to max. 250 ml capacity.

Cone	SP	Cat. No.
NS	pcs.	
19/26	1	5.2852.02
29/32	1	5.2852.04

Distilling Receivers



Distilling Receiver to Bernauer

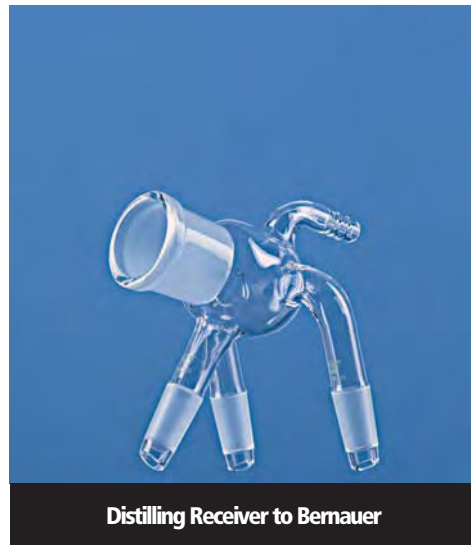

Distilling Receiver to Bernauer

Distilling Receivers to Bernauer

DURAN®. Modified, with vacuum connection, with 3 flasks NS 14/23 or without flasks.

Flask ml	Socket NS	SP pcs.	Cat. No.
50	14/23	1	5.2880.01
100	19/26	1	5.2880.02
100	29/32	1	5.2880.04
without flask	14/23	1	5.2881.01
without flask	19/26	1	5.2881.02
without flask	29/32	1	5.2881.04

5



Distilling Receiver to Anschütz-Thiele, Straight



Distilling Receiver to Anschütz-Thiele, Straight

Distilling Receivers to Anschütz-Thiele, Straight

DURAN®. Receiver with straight adapter, graduated. With cone and socket, vacuum connection GL 18. NS stopcock with glass- or PTFE stopcock.

Capacity ml	Socket / Cone NS	Description	SP pcs.	Cat. No.
25	14/23	glass solid	1	5.2950.01
50	29/32	glass solid	1	5.2950.04
100	29/32	glass solid	1	5.2950.14
25	14/23	PTFE	1	5.2951.01
50	29/32	PTFE	1	5.2951.04
100	29/32	PTFE	1	5.2951.14



Distilling Receivers



Distilling Receiver to Anschütz-Thiele, Bent, Glass Stopcock



Distilling Receiver to Anschütz-Thiele, Straight, with Cooling Jacket, Glass Stopcock



Distilling Receiver to Anschütz-Thiele, Straight, with Cooling Jacket, PTFE Stopcock



Distilling Receiver to Anschütz-Thiele, Bent, PTFE Stopcock

Distilling Receivers to Anschütz-Thiele, Straight, with Cooling Jacket

DURAN®. Receiver with straight adapter, with cooling jacket, graduated. With cone and socket, vacuum connection GL 18. NS stopcock with glass- or PTFE stopcock.

Capacity ml	Socket / Cone NS	Description	SP pcs.	Cat. No.
50	29/32	glass solid	1	5.3050.04
100	29/32	glass solid	1	5.3050.14
50	29/32	PTFE	1	5.3051.04
100	29/32	PTFE	1	5.3051.14

Distilling Receivers to Anschütz-Thiele, Bent

DURAN®. Receiver with bent adapter, graduated. With cone and socket, vacuum connection GL 18.

NS stopcock with glass- or PTFE stopcock.

Capacity ml	Socket / Cone NS	Description	SP pcs.	Cat. No.
25	14/23	glass solid	1	5.2980.01
50	29/32	glass solid	1	5.2980.04
100	29/32	glass solid	1	5.2980.14
25	14/23	PTFE	1	5.2981.01
50	29/32	PTFE	1	5.2981.04
100	29/32	PTFE	1	5.2981.14



Connector with Stopcock



Funnel, Plain

Connectors with Stopcock				
DURAN®. With NS stopcock, cone and socket.				
Cone NS	Socket NS	Bore mm	SP pcs.	Cat. No.
14/23	14/23	2,5	1	5.3100.11
29/32	29/32	8	1	5.3100.44

Funnels, Plain				
Soda-Lime Glass. 60° angle. With short stem.				
Funnel O-Ø mm	Stem O-Ø mm	Stem Length mm	SP pcs.	Cat. No.
30	6	30	10	5.3180.03
35	6	35	10	5.3180.05
40	6	40	10	5.3180.08
45	7	45	10	5.3180.09
50	7	50	10	5.3180.12
55	8	55	10	5.3180.15
60	8	60	10	5.3180.17
70	9	70	10	5.3180.20
80	9	80	10	5.3180.25
100	10	100	10	5.3180.33



Connector Bent

Connectors, Bent				
DURAN®. Bent, with socket NS 14/23 for thermometer or air leak tubes, cone and lateral socket.				
Cone NS	Socket NS		SP pcs.	Cat. No.
29/32	29/32		1	5.3130.44
45/40	29/32		1	5.3130.64



Funnel with Cone

Funnels with Cone				
Solid addition funnels 60° angle, with cone.				
Funnel O-Ø mm	Cone NS		SP pcs.	Cat. No.
45	14/23		1	5.3210.01
55	19/26		1	5.3210.02
70	24/29		1	5.3210.03
80	29/32		1	5.3210.04

Drying Tubes / Cold Traps



Drying Tube, Straight




Drying Tube, Bent



Drying Tube with Cone, Bent

Drying Tubes (Chlorcalcium Tubes)				
DURAN®. DIN 12610. With ball and tubing nozzle, straight or bent.				
Nom. Length mm	I-Ø mm	Description	SP pcs.	Cat. No.
100	13	straight	1	5.3300.10
150	13	straight	1	5.3300.13
100	13	bent	1	5.3330.10
150	13	bent	1	5.3330.13

Drying Tubes with Cone, Bent				
DURAN®. With cone. 75° bent.				
I-Ø mm	Cone NS		SP pcs.	Cat. No.
15	14/23		1	5.3370.01
15	19/26		1	5.3370.02
15	24/29		1	5.3370.03
15	29/32		1	5.3370.04

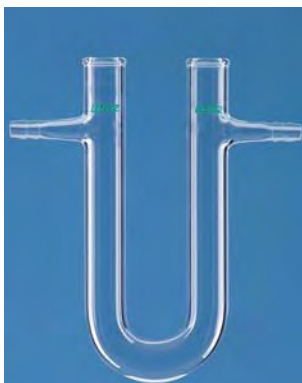

Drying Tube, U-shaped



Drying Tube, U-shaped,  
with NS Stopcocks

Drying Tubes, U-Shaped				
DURAN®. Side tubes with nozzle. Outer diameter 6 mm.				
Nom. Length mm	I-Ø mm		SP pcs.	Cat. No.
100	13		1	5.3390.10
130	13		1	5.3390.13
180	18		1	5.3390.18

Drying Tubes, U-Shaped				
DURAN®. DIN 12616. With removable NS stopcocks. Side tubes with nozzle. Outer diameter 6 mm.				
Nom. Length mm	Socket NS		SP pcs.	Cat. No.
125	14/23		1	5.3420.13
150	19/26		1	5.3420.15



Cold Trap  
without Condensate Drain



Cold Trap  
with Condensate Drain

Cold Traps				
DURAN®. Without oder with valve stopcock. Valve stopcock with retaining device for condensate drain. Can be filled directly with cooling agents. Low consumption of cooling agent due to double walled design. Two connections NS 29/32: Apparatus onto socket, vacuum pump onto cone.				
Coolant Cap. ml	Description		SP pcs.	Cat. No.
200	without condensate drain		1	5.3550.46
500	without condensate drain		1	5.3550.58
1000	without condensate drain		1	5.3550.70
200	with condensate drain		1	5.3555.46
500	with condensate drain		1	5.3555.58
1000	with condensate drain		1	5.3555.70



Soxhlet Extractor  
with Dimroth Condenser



Soxhlet Extractor  
with Allihn Condenser

### Soxhlet Extractors

**DURAN®.** For the extraction from solids with solvents. The solvent is recirculated continuously and distilled from the extracted sample before contacting the solid again. The extract is concentrated in the distillation flask. The method allows an effective separation with relatively small amounts of extracting solvents.

The complete apparatus consists of

- round bottom flask
- compact and robust designed extractor with NS 29/32 flask connection
- Dimroth- or Allihn condenser with thread GL 14

For Dimroth condenser, individually, see page 59.

For Allihn condenser, individually, see page 58.

Extractor ml	Condenser NS	Flask ml	Condenser	SP pcs.	Cat. No.
30	29/32	100	Dimroth	1	5.3600.25
70	34/35	100	Dimroth	1	5.3600.31
100	45/40	250	Dimroth	1	5.3600.37
150	45/40	250	Dimroth	1	5.3600.43
200	45/40	250	Dimroth	1	5.3600.46
250	45/40	500	Dimroth	1	5.3600.49
300	60/46	500	Dimroth	1	5.3600.52
500	60/46	1000	Dimroth	1	5.3600.58
1000	71/51	2000	Dimroth	1	5.3600.70
30	29/32	100	Allihn	1	5.3650.25
70	34/35	100	Allihn	1	5.3650.31
100	45/40	250	Allihn	1	5.3650.37
150	45/40	250	Allihn	1	5.3650.43
200	45/40	250	Allihn	1	5.3650.46
250	45/40	500	Allihn	1	5.3650.49



Soxhlet Extractor Head  
without Stopcock



Soxhlet Extractor Head  
with NS Stopcock

### Soxhlet Extractor Heads

DURAN®. DIN 12602. Available without or with NS glass stopcock.

Extractor ml	Condenser NS	Description	Desc.	SP pcs.	Cat. No.
30	29/32	w/o stopcock	DIN	1	5.3951.25
70	34/35	w/o stopcock	(1)	1	5.3951.31
100	45/40	w/o stopcock	DIN	1	5.3951.37
150	45/40	w/o stopcock	(1)	1	5.3951.43
200	45/40	w/o stopcock	(1)	1	5.3951.46
250	45/40	w/o stopcock	DIN	1	5.3951.49
300	60/46	w/o stopcock	(1)	1	5.3951.52
500	60/46	w/o stopcock	DIN	1	5.3951.58
1000	71/51	w/o stopcock	DIN	1	5.3951.70
70	34/35	NS stopcock	(1)	1	5.4001.31
100	45/40	NS stopcock	DIN	1	5.4001.37
150	45/40	NS stopcock	(1)	1	5.4001.43
250	45/40	NS stopcock	DIN	1	5.4001.49
500	60/46	NS stopcock	DIN	1	5.4001.58

(1) In addition to DIN range.

### Soxhlet Extractors with Flange

DURAN®. Extractor with flange LF 100, head LF 100, with socket NS 45/40. Complete with 2 l round bottom flask and Dimroth condenser. For Dimroth condenser, individually, see page 59.

Extractor ml	Condenser NS	Flask ml	SP pcs.	Cat. No.
2000	45/40	2000	1	5.3670.73

### Soxhlet Extractor Heads with Flange

DURAN®. Extractor head 2000 ml, with flange LF 100.

Extractor ml	SP pcs.	Cat. No.
2000	1	5.3672.01



Soxhlet Extractor with Flange



Thielepape Extractor

### Thielepape Extractors

DURAN®. For the extraction of solids. The vapours pass directly into the condenser. The condensate flows continuously through the extraction sample back into the flask.

The complete apparatus consists of

- round bottom flask
- extractor with glass frit, porosity 0
- Dimroth condenser with thread GL 14

For Dimroth condenser, individually, see page 59.

Extractor ml	Condenser NS	Flask ml	SP pcs.	Cat. No.
30	29/32	100	1	5.3700.25
150	45/40	250	1	5.3700.43
250	45/40	500	1	5.3700.49



Extractor Head



Frit Sleeve

### Thielepape Extractor Heads

DURAN®. With NS stopcock, two-way.

Extractor ml	Condenser NS	SP pcs.	Cat. No.
30	29/32	1	5.4051.25
150	45/40	1	5.4051.43
250	45/40	1	5.4051.49

### Tubes with Sintered Glass for Thielepape Extractors

Glass tube with sintered filter disc, porosity 0.

Extractor ml	SP pcs.	Cat. No.
30	1	5.4052.25
150	1	5.4052.43
250	1	5.4052.49



Jacketed Extractor to Knöfler-Böhm

**Jacketed Extractors, Knöfler-Böhm**  
**DURAN®.** The condensate passes the extraction sample and flows back into the flask continuously without interrupting the extraction process, i.e. the solvent is recirculated continuously.  
 The complete apparatus consists of

- round bottom flask
- Dimroth condenser with thread GL 14
- extractor

For Dimroth condenser individually see page 59.

Extractor ml	Condenser NS	Flask ml	SP pcs.	Cat. No.
30	29/32	100	1	5.3750.25
150	45/40	250	1	5.3750.43
250	45/40	500	1	5.3750.49
500	60/46	1000	1	5.3750.58



Head for Jacketed Extractor

**Heads for Jacketed Extractors, Knöfler-Böhm**

Extractor ml	Condenser NS	SP pcs.	Cat. No.
30	29/32	1	5.4101.25
100	45/40	1	5.4101.37
250	45/40	1	5.4101.49
500	60/46	1	5.4101.58



Twisselmann Extractor

**Twisselmann Extractors**  
**DURAN®. With improved Twisselmann condenser with vacuum jacket and round bottom flask, water connection GL 14.**

Extractor ml	Condenser NS	Flask ml	SP pcs.	Cat. No.
30	29/32	100	1	5.3800.25
70	34/35	100	1	5.3800.31
100	45/40	250	1	5.3800.37
150	45/40	250	1	5.3800.43



Extractor Head with Vacuum Jacket



Condenser with Receiver

**Twisselmann Extractor Heads with Vacuum Jacket**

Extractor ml	Condenser NS	SP pcs.	Cat. No.
30	29/32	1	5.4151.25
70	34/35	1	5.4151.31
100	45/40	1	5.4151.37
150	45/40	1	5.4151.43

**Condensers with Receiver to Twisselmann**  
**With water connection GL 14.**

Cone NS	for Extractor Cap. ml	SP pcs.	Cat. No.
29/32	30	1	5.4201.04
34/35	70	1	5.4201.05
45/40	100-250	1	5.4201.06





Extractor for Solids

### Extractors for Solids

DURAN®. For the extraction of solids (warm). With water connection GL 14.

Extractor ml	Condenser NS	Flask ml	SP pcs.	Cat. No.
70	45/40	250	1	5.4310.31
100	45/40	250	1	5.4310.37
250	45/40	500	1	5.4310.49



Extractor Head for Solids



Extractor Sleeve for Solids

### Extractor Heads for Solids

For the extraction of solids (warm), with glass insert for the extraction sleeve.

Extractor ml	Condenser NS	SP pcs.	Cat. No.
70	45/40	1	5.4311.31
100	45/40	1	5.4311.37
250	45/40	1	5.4311.49

### Glass Inserts with Bores for Solids

Extractor ml	SP pcs.	Cat. No.
70	1	5.4312.01
100	1	5.4312.02
250	1	5.4312.03



Extractor for Specific Light Solvents

### Extractors for Specific Light Solvents

DURAN®. Extraction apparatus consisting of:

Extractor head with insert filter (frit, porosity 0) and PTFE valve stopcock

- Dimroth condenser with thread GL 14


- round bottom flask.

For Dimroth condenser individually see page 59.

Extractor ml	Condenser NS	Flask ml	SP pcs.	Cat. No.
100	45/40	250	1	5.4320.37
250	45/40	500	1	5.4320.49
500	60/46	1000	1	5.4320.58



Extractor Head for  
Specific Light Solvents

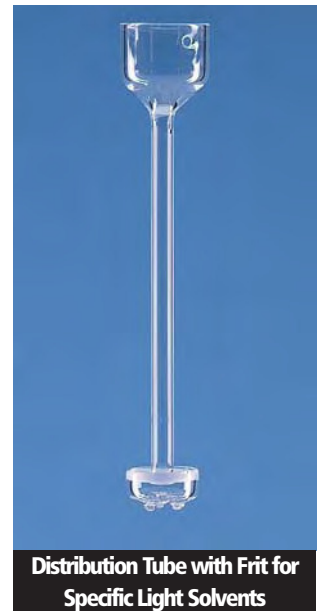

Distribution Tube with Frit for  
Specific Light Solvents

### Extractor Heads for Specific Light Solvents

For the extraction of liquids light solvents, with insert filter (frit, porosity 0).

Extractor ml	Condenser NS	SP pcs.	Cat. No.
100	45/40	1	5.4321.37
250	45/40	1	5.4321.49
500	60/46	1	5.4321.58

### Distribution Tubes with Frit (Porosity 0) for Specific Light Solvents

Extractor ml	SP pcs.	Cat. No.
100	1	5.4322.02
250	1	5.4322.03
500	1	5.4322.04



**Extractors  
for Specific Heavier Solvents**

Extraction apparatus consisting of:

- Extractor head with insert filter (frit, porosity 0) and PTFE valve stopcock
- Dimroth condenser
- round bottom flask

For Dimroth condenser individually see page 59

Extractor ml	Condenser NS	Flask ml	SP pcs.	Cat. No.
100	45/40	250	1	5.4330.37
250	45/40	500	1	5.4330.49
500	60/46	1000	1	5.4330.58



**Extractor Heads  
for Specific Heavier Solvents**


For the extraction of liquids with specific heavier solvents. With insert filter (frit, porosity 0).

Extractor ml	Condenser NS	SP pcs.	Cat. No.
100	45/40	1	5.4331.37
250	45/40	1	5.4331.49
500	60/46	1	5.4331.58


**Distribution Tubes with Frit (Porosity 0)  
for Specific Heavier Solvents**

Extractor ml	SP pcs.	Cat. No.
100		5.4332.02
250		5.4332.03
500		5.4332.04

Chromatographic Columns

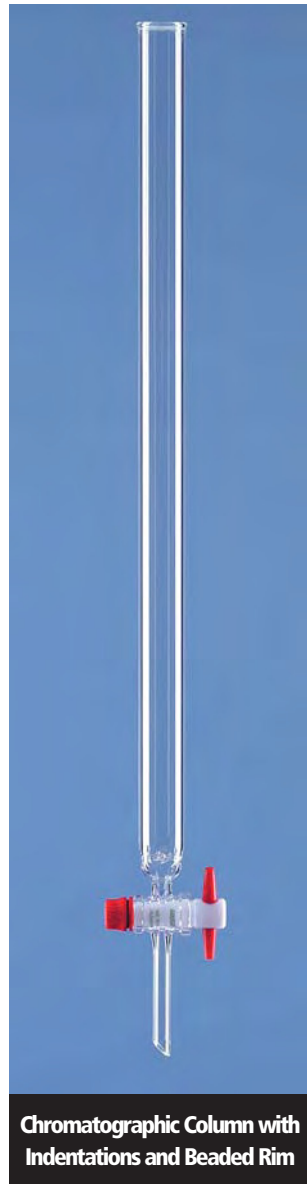

Chromatographic Column with Indentations and Beaded Rim

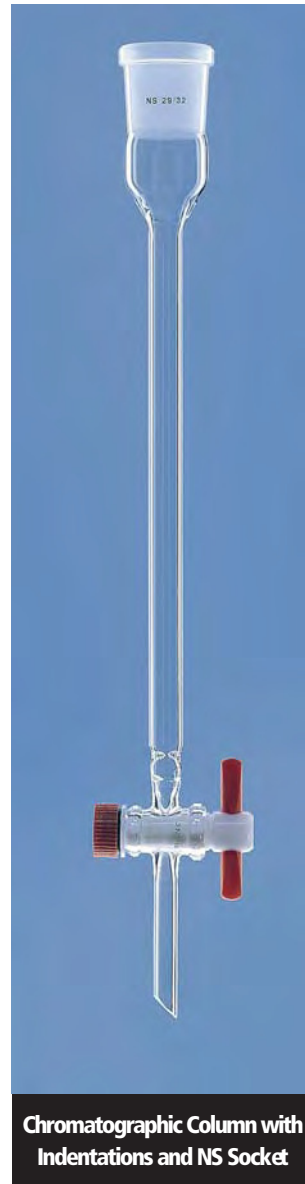

Chromatographic Column with Indentations and NS Socket

**Chromatographic Columns with Indentations and PTFE Stopcock**


Basic chromatographic columns with indentations above the stopcock for placing a cotton plug.  
With PTFE stopcock and retaining device.

Available in two versions:

- with beaded rim
- with NS socket

Eff. Length mm	Column-Ø mm	Capacity ml	Description	SP pcs.	Cat. No.
200	10	15	beaded rim	1	5.4357.01
200	15	35	beaded rim	1	5.4357.02
400	20	125	beaded rim	1	5.4357.04
600	30	430	beaded rim	1	5.4357.06
800	40	1000	beaded rim	1	5.4357.08
200	10	15	socket NS 14/23	1	5.4407.01
200	15	35	socket NS 14/23	1	5.4407.02
400	20	125	socket NS 29/32	1	5.4407.04
600	30	430	socket NS 29/32	1	5.4407.06
800	40	1000	socket NS 29/32	1	5.4407.08


Chromatographic Columns

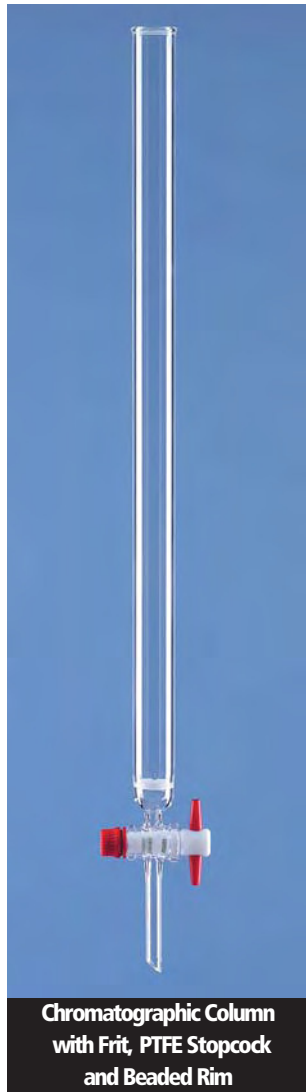

Chromatographic Column with Frit, PTFE Stopcock and Beaded Rim



Chromatographic Column with Frit, PTFE Stopcock and NS Socket

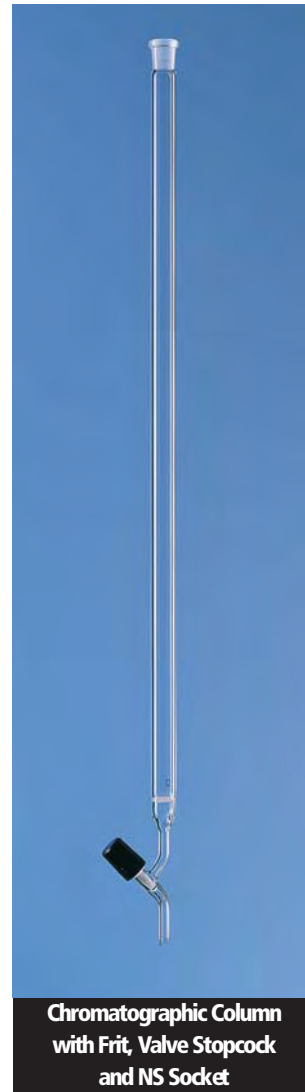

Chromatographic Column with Frit, Valve Stopcock and NS Socket

Chromatographic Columns with Frit, PTFE- or Valve Stopcock



Chromatographic columns with sintered frit, porosity 0.

Available in three versions:

- with beaded rim and PTFE stopcock
- with NS socket and PTFE stopcock
- with NS socket and valve stopcock (bore 0-2,5 mm)

Eff. Length mm	Column-Ø mm	Capacity ml	Description	Stopcock	SP pcs.	Cat. No.
200	10	15	beaded rim	PTFE	1	5.4457.01
200	15	35	beaded rim	PTFE	1	5.4457.02
400	20	125	beaded rim	PTFE	1	5.4457.04
600	30	430	beaded rim	PTFE	1	5.4457.06
800	40	1000	beaded rim	PTFE	1	5.4457.08
100	10	8	socket NS 14/23	PTFE	1	5.4507.00
200	10	15	socket NS 14/23	PTFE	1	5.4507.01
300	10	23	socket NS 14/23	PTFE	1	5.4507.02
200	15	35	socket NS 14/23	PTFE	1	5.4507.03
400	20	125	socket NS 29/32	PTFE	1	5.4507.04
600	30	430	socket NS 29/32	PTFE	1	5.4507.06
100	10	8	socket NS 14/23	valve	1	5.4508.00
200	10	15	socket NS 14/23	valve	1	5.4508.01
300	10	23	socket NS 14/23	valve	1	5.4508.02
200	15	35	socket NS 14/23	valve	1	5.4508.03
400	20	125	socket NS 29/32	valve	1	5.4508.04
600	30	430	socket NS 29/32	valve	1	5.4508.06

Chromatographic Columns

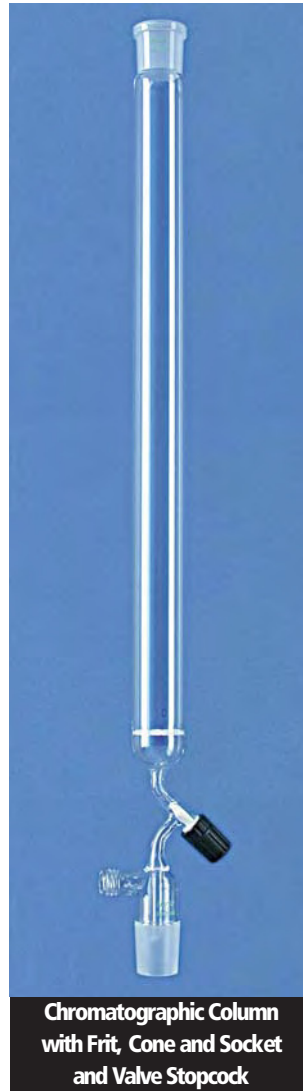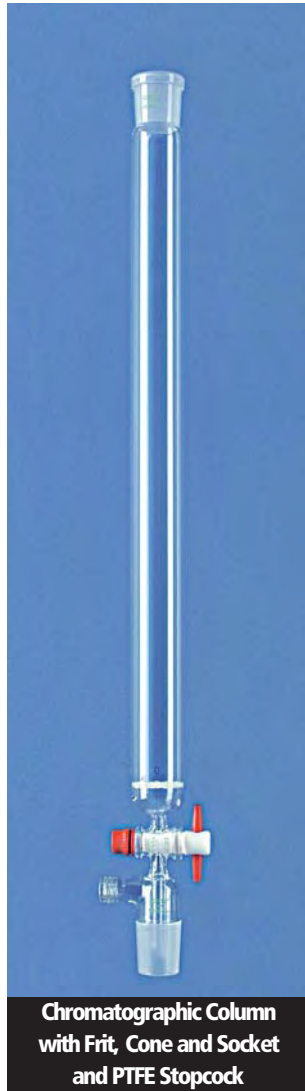

5

**Chromatographic Columns with Frit, Cone and Socket**

Chromatographic columns with sintered frit, porosity 0, suction tube thread GL 18.  
 Available in two versions:  
 - with PTFE stopcock  
 - with valve stopcock (bore 0-2,5 mm)

Eff. Length mm	Column-Ø mm	Capacity ml	Socket/Cone NS	Stopcock	SP pcs.	Cat. No.
200	15	35	14/23	PTFE	1	5.4509.01
400	20	120	14/23	PTFE	1	5.4509.02
400	30	280	29/32	PTFE	1	5.4509.04
600	30	430	29/32	PTFE	1	5.4509.06
200	15	35	14/23	valve	1	5.4509.11
400	20	120	14/23	valve	1	5.4509.12
400	30	280	29/32	valve	1	5.4509.14
600	30	430	29/32	valve	1	5.4509.16

Sprayer - Wash Bottles - Kipp Dispensers



Sprayer, Complete



Test Tube Sprayer



Wash Bottle



Wash Bottle Head

Sprayers

DURAN®. Consists of an Erlenmeyer flask, 100 ml, with NS 19/26, sprayer head, clamp and rubber bulb.

Description	SP pcs.	Cat. No.
Sprayer, complete	1	5.4700.00
Erlenmeyer flask, 100 ml, NS 19/26	1	3.0219.37
Sprayer head, NS 19/26	1	5.4700.04
Rubber bulb	1	5.4700.05
Clamp, NS 19/26	1	1.1037.18

Wash Bottles

DURAN®. Consists of a flat bottom flask, 500 resp. 1000 ml, to DIN 12348, with NS 29/32 and wash bottle head.

Description	Capacity ml	SP pcs.	Cat. No.
Wash bottle, complete	500	1	5.4750.58
Wash bottle, complete	1000	1	5.4750.70
Wash bottle head	500	1	5.4751.58
Wash bottle head	1000	1	5.4751.70

Test Tube Sprayers

DURAN®. Consists of a test tube NS 14/23 resp. 19/26, sprayer head, clamp and rubber bulb.

Description	Capacity ml	Joint NS	SP pcs.	Cat. No.
Sprayer, complete	6	14/23	1	5.4706.00
Sprayer, complete	12	19/26	1	5.4712.00
Sprayer head	6	14/23	1	5.4706.05
Sprayer head	12	19/26	1	5.4712.05
Test tube	6	14/23	1	5.4706.06
Test tube	12	19/26	1	5.4712.06
Rubber bulb			1	5.4700.05
Clamp		14/23	1	1.1037.14
Clamp		19/26	1	1.1037.19



Kipp Dispenser



Kipp Dispenser Head

Kipp Dispensers

Dispenser head with 1 l bottle with NS 29/32.

Capacity ml	SP pcs.	Cat. No.
1	1	5.4760.01
2	1	5.4760.04
3	1	5.4760.07
5	1	5.4760.10
10	1	5.4760.13
20	1	5.4760.19
25	1	5.4760.22
50	1	5.4760.28
100	1	5.4760.37

Kipp Dispenser Heads

DURAN®.

Capacity ml	SP pcs.	Cat. No.
1	1	5.4761.01
2	1	5.4761.04
3	1	5.4761.07
5	1	5.4761.10
10	1	5.4761.13
20	1	5.4761.19
25	1	5.4761.22
50	1	5.4761.28
100	1	5.4761.37

Gas Washbottles

Bottles and Heads to DIN 12596.  
 Supplied with oder without filter disc, porosity 1.  
 The heads correspond with the safety requirements of DIN.

**Gas Washbottles to Drechsel  
 without Filter Disc**

Conical joint NS 29/32.  
 Available with hose nozzle O-Ø 11 mm or thread GL 14.

Capacity ml	Description	SP pcs.	Cat. No.
100	nozzle	1	5.5005.37
250	nozzle	1	5.5005.49
500	nozzle	1	5.5005.58
1000	nozzle	1	5.5005.70
100	GL 14	1	5.5005.G1
250	GL 14	1	5.5005.G2
500	GL 14	1	5.5005.G3
1000	GL 14	1	5.5005.G4



Gas Washbottle to Drechsel  
 without Filter Disc



Gas Washbottle Head to  
 Drechsel without Filter Disc

**Gas Washbottle Heads without Filter Disc**

Cone NS 29/32. For all bottle sizes to DIN 12463.  
 Available with hose nozzle O-Ø 11 mm or thread GL 14.

Description	SP pcs.	Cat. No.
Nozzle	1	5.5006.00
GL 14	1	5.5006.G0

**Gas Washbottles to Drechsel  
 with Filter Disc**

Conical joint NS 29/32.  
 Available with hose nozzle O-Ø 11 mm or thread GL 14.

Capacity ml	Porosity	Description	SP pcs.	Cat. No.
100	0	nozzle	1	5.5100.37
250	0	nozzle	1	5.5100.49
500	0	nozzle	1	5.5100.58
1000	0	nozzle	1	5.5100.70
100	1	nozzle	1	5.5101.37
250	1	nozzle	1	5.5101.49
500	1	nozzle	1	5.5101.58
1000	1	nozzle	1	5.5101.70
100	2	nozzle	1	5.5102.37
250	2	nozzle	1	5.5102.49
500	2	nozzle	1	5.5102.58
1000	2	nozzle	1	5.5102.70
100	0	GL 14	1	5.5100.G1
250	0	GL 14	1	5.5100.G2
500	0	GL 14	1	5.5100.G3
1000	0	GL 14	1	5.5100.G4
100	1	GL 14	1	5.5101.G1
250	1	GL 14	1	5.5101.G2
500	1	GL 14	1	5.5101.G3
1000	1	GL 14	1	5.5101.G4
100	2	GL 14	1	5.5102.G1
250	2	GL 14	1	5.5102.G2
500	2	GL 14	1	5.5102.G3
1000	2	GL 14	1	5.5102.G4



Gas Washbottle  
 to Drechsel  
 with Filter Disc and Hose Nozzle



Gas Washbottle Head  
 to Drechsel  
 with Filter Disc and Hose Nozzle

**Gas Washbottle Heads with Filter Disc**

Cone NS 29/32. Fits all bottle sizes to DIN 12463.  
 Available with hose nozzle O-Ø 11 mm or thread GL 14.

Description	Porosity	SP pcs.	Cat. No.
Nozzle	0	1	5.5104.00
Nozzle	1	1	5.5104.01
Nozzle	2	1	5.5104.02
GL 14	0	1	5.5104.G0
GL 14	1	1	5.5104.G1
GL 14	2	1	5.5104.G2



Gas Washbottles



Gas Washbottle without Head

Gas Washbottles without Head					
DURAN®. NS 29/32, to DIN 12463.					
Capacity ml	Ø mm	Height mm	Description	SP pcs.	Cat. No.
100	40	200	with base	1	5.5150.37
250	55	200	with base	1	5.5150.49
500	75	200	without base	1	5.5150.58
1000	107	200	without base	1	5.5150.70

Gas Washbottles to Drechsel with Screw Connections					
DURAN®. With screw connections.					
Available with or without filter disc porosity 1, insert height adjustable.					
Capacity ml	thread GL	Description	SP pcs.	Cat. No.	
500	45	without filter disc	1	5.5300.58	
500	45	with filter disc	1	5.5301.58	



Gas Washbottle to Drechsel  
without Filter Disc



Gas Washbottle to Drechsel  
with Filter Disc

Spare Parts for Gas Washbottles with Screw Connections			
Description	SP pcs.	Cat. No.	
Gas washbottle to Drechsel without filter disc	1	5.5303.00	
Gas washbottle to Drechsel with filter disc porosity 1	1	5.5303.01	
Laboratory bottle 500 ml with thread GL 45	1	7.1000.58	
Plastic nozzle, straight	1	1.3500.00	
Screw-cap GL 14	1	1.3210.14	
Screw-cap GL 45	1	1.3210.45	
Silicone ring, 26 x 42 x 5 mm	1	5.5303.05	



Gas Washbottle Head to  
Drechsel without Filter Disc




Gas Washbottle Head to  
Drechsel with Filter Disc

## Analytical Apparatus



**Weighing Bottles with NS Stopper**

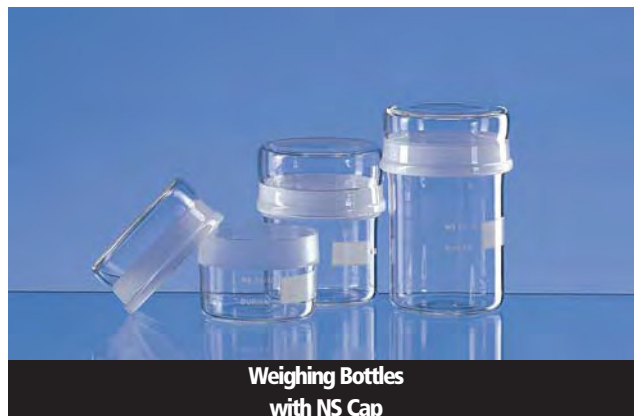

**Weighing Bottles with NS Cap**

### Weighing Bottles with NS Stopper

With interchangeable NS stopper. With white inscription label. Burned-in imprint of capacity and size. Available in high or tall shape.

Ø x H mm	Joint NS	Shape	SP pcs.	Cat. No.
20 x 40	19/12	high	6	5.5600.02
25 x 40	24/12	high	6	5.5600.05
30 x 50	29/12	high	6	5.5600.08
35 x 50	34/12	high	6	5.5600.12
40 x 50	40/12	high	6	5.5600.15
40 x 65	40/12	high	6	5.5600.19
35 x 70	34/12	high	6	5.5600.22
40 x 80	40/12	high	6	5.5600.25
50 x 80	50/12	high	6	5.5600.28
25 x 25	24/12	tall	6	5.5605.02
40 x 25	40/12	tall	6	5.5605.04
35 x 30	34/12	tall	6	5.5605.09
50 x 30	50/12	tall	6	5.5605.13
60 x 30	60/12	tall	6	5.5605.16
80 x 30	80/12	tall	6	5.5605.21

### Weighing Bottles with NS Cap

DURAN®. With interchangeable NS cap. With white inscription label. Available in tall, medium or high shape.

Ø x H mm	Joint NS	Shape	SP pcs.	Cat. No.
30 x 30	34/12	tall	6	5.5653.34
38 x 35	40/12	tall	6	5.5653.40
48 x 35	50/12	tall	6	5.5653.50
75 x 35	80/12	tall	1	5.5653.80
30 x 50	34/12	medium	6	5.5655.34
38 x 50	40/12	medium	6	5.5655.40
48 x 50	50/12	medium	6	5.5655.50
75 x 50	80/12	medium	1	5.5655.80
30 x 70	34/12	high	6	5.5657.34
38 x 70	40/12	high	6	5.5657.40
48 x 70	50/12	high	6	5.5657.50
75 x 95	80/12	high	1	5.5657.80

5



**Weighing Scoop, Glass, round**

### Weighing Scoops, Glass

Borosilicate glass. Due to the tube design of the stem the scoop works as a weighing funnel and allows complete emptying without losses. Available with round or pointed shape.

Eff. Length mm	Capacity mm	Shape	SP pcs.	Cat. No.
82	3	round	1	5.5680.03
95	6	round	1	5.5680.06
116	10	round	1	5.5680.10
65	3	pointed	1	5.5690.03
70	6	pointed	1	5.5690.06
80	10	pointed	1	5.5690.10



**Weighing Scoop, Glass, pointed**

Analytical Apparatus



Bubble Counter



Melting Point Apparatus to Thiele

Bubble Counters

DURAN®. For controlling the gas flow in distilling apparatus.

Height mm	SP pcs.	Cat. No.
100	1	5.5960.00

Melting Point Determination Apparatus to Thiele

Description	SP pcs.	Cat. No.
without side tubes	1	5.4850.00
with side tubes	1	5.4850.01

Water Estimators to Dean Stark

DURAN®. DIN 12420. Xylol method. With round bottom flask, 500 ml, NS 29/32 and Liebig condenser, jacket length 400 mm, cone and socket NS 29/32. Measuring tube with or without stopcock, capacity 10:0,1 ml.

Volumen ml	Zero Point	Description	SP pcs.	Cat. No.
10: 0,1	at the stopcock	with stopcock	1	5.6000.00
10: 0,1	above the stopcock	with stopcock	1	5.6000.02
10: 0,1	at the top	w/o stopcock	1	5.6000.04

Spare Parts for Water Estimators to Dean Stark

Description	SP pcs.	Cat. No.
Measuring tube with stopcock, 10: 0,1 ml, zero point at the stopcock	1	5.6003.01
Measuring tube with stopcock, 10: 0,1 ml, zero point above the stopcock	1	5.6003.03
Measuring tube without stopcock, 10: 0,1 ml, zero point at the top	1	5.6003.05
Round bottom flask, 500 ml, NS 29/32	1	3.0029.58
Liebig condenser, jacket length 400 mm, cone and socket NS 29/32	1	5.2104.G4



Water Estimator to Dean Stark



Pycnometer to Gay-Lussac, unadjusted



Pycnometer to Gay-Lussac, adjusted



Pycnometer to Gay-Lussac, adjusted, with Thermometer and Side Capillary

### Pycnometers to Gay-Lussac, unadjusted

DURAN®. DIN 12797 and ISO 3507. Stopper NS 10/19 with capillary. The top end of the stopper is grounded and polished. The nominal capacity is printed at the bottom.

Nom. Cap. cm <sup>3</sup>	Description	SP pcs.	Cat. No.
5	(1)	1	5.6300.10
10	DIN	1	5.6300.13
25	DIN	1	5.6300.22
50	DIN	1	5.6300.28
100	(1)	1	5.6300.37

(1) in addition to DIN-range.

### Pycnometers to Gay-Lussac, adjusted

DURAN®. DIN 12 797 and ISO 3507. Stopper NS 10/19 with capillary. The top end of the stopper is grounded and polished. The actual capacity is engraved with an accuracy of 0,001 cm<sup>3</sup>. Adjusted to In, i.e. the loaded amount of liquid corresponds with the engraved capacity.

Nom. Cap. cm <sup>3</sup>	Description	SP pcs.	Cat. No.
5	(1)	1	5.6302.10
10	DIN	1	5.6302.13
25	DIN	1	5.6302.22
50	DIN	1	5.6302.28
100	(1)	1	5.6302.37

(1) in addition to DIN-range.

### Pycnometers to Gay-Lussac, adjusted, with Thermometer and Side Tube

DURAN®. DIN 12809 and ISO 3507. Side capillary with conical joint cap NS 7/16. Thermometer with frosted glass scale, with NS 10/19, measuring range 10 to 35 °C, subdivisions 0,2 °C, filled with mercury. The actual capacity is engraved with an accuracy of 0,001 cm<sup>3</sup>.

Nom. Cap. cm <sup>3</sup>	Description	SP pcs.	Cat. No.
10	DIN	1	5.6400.13
25	DIN	1	5.6400.22
50	DIN	1	5.6400.28
100	(1)	1	5.6400.37

(1) in addition to DIN-range.

### Pycnometer Heads with Wide-Neck Bottle with Conical Shoulder

For density determinations (raw density) of bitumen-like materials and mineral materials. Consists of wide-neck bottle, conical shoulder, 500 resp. 1000 ml with NS joint and pycnometer head.


Description	Capacity ml	Joint NS	SP pcs.	Cat. No.
Pycnometer head with conical shoulder bottle	500	45/27	1	5.6600.06
Pycnometer head with conical shoulder bottle	1000	60/37	1	5.6600.07
Pycnometer head without conical shoulder bottle		45/27	1	5.6602.06
Pycnometer head without conical shoulder bottle		60/37	1	5.6602.07




Pycnometer Head with Wide-Neck Bottle with Conical Shoulder



Sedimentation Cone to Imhoff  
without Stopcock

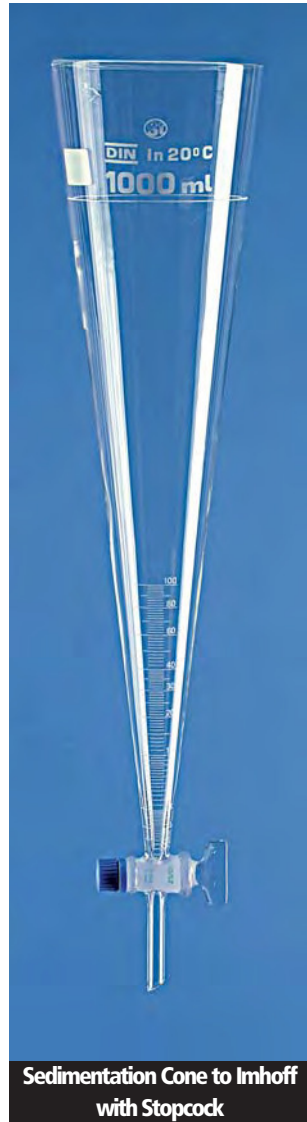

Sedimentation Cone to Imhoff  
with Stopcock

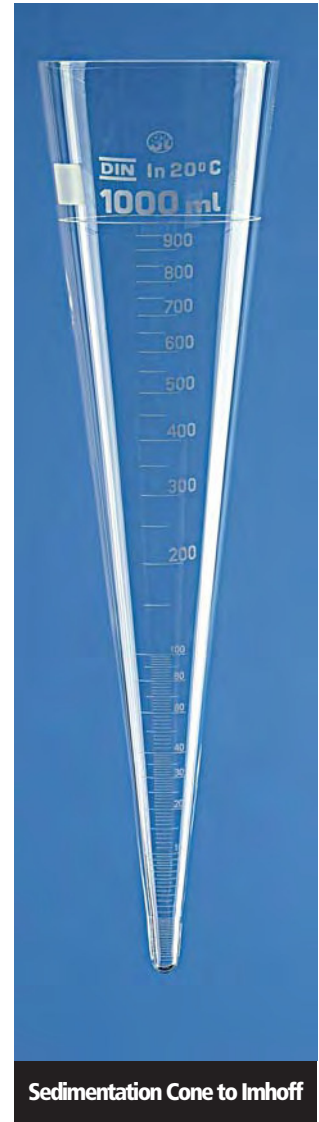

Sedimentation Cone to Imhoff

### Sedimentation Cones to Imhoff

Borosilicate glass 3.3. DIN 12672. Graduation up to 100 ml, ring mark at 1000 ml, available with or without stopcock.

Graduation (ml)	Subdivision (ml)	Description	SP	Cat. No.
0- 2	0,1			
2- 10	0,5			
10- 40	1,0			
40-100	2,0			
ring mark	1000			
		without stopcock	1	5.6700.01
		with stopcock	1	5.6700.05

### Sedimentation Cones to Imhoff

Borosilicate glass 3.3. DIN 12672. Graduation up to 1000 ml, without stopcock.

Graduation (ml)	Subdivision (ml)	Description	SP	Cat. No.
0- 2	0,1			
2- 10	0,5			
10- 40	1,0			
40- 100	2,0			
100-1000	50			
		without stopcock	1	5.6700.03




Oxygen Determination Bottle to Winkler

### Oxygen Determination Bottles to Winkler

For the determination of the solved oxygen in water. The capacity is engraved at the bottle with an accuracy of  $\pm 0,01$  ml . With white inscription label. Solid, oblique grounded NS stopper, which can be fixed with a clamp. Each bottle is individually adjusted with its stopper, which is not interchangeable. An identical serial number at the bottle and the stopper prevents accidentally mistakes.

Description	Capacity ml	Joint NS	SP pcs.	Cat. No.
Oxygen det. bottle to Winkler	100-150	14/23	1	5.6050.37
Oxygen det. bottle to Winkler	250-300	19/26	1	5.6050.49
Clamp		14/23	1	5.6055.00
Clamp		19/26	1	5.6055.01



Clamp for Oxygen Determination Bottles




Gauge to Bennert

### Gauges to Bennert

For measuring the absolute pressure. With adjustable mirror scale on a hard-wood stand. With mercury transportation filling. Measuring range 2-180 mbar.

Description	SP pcs.	Cat. No.
Gauge to Bennert, complete	1	5.8020.00
Glass part for gauge to Bennert, with mercury transportation filling	1	5.8021.00

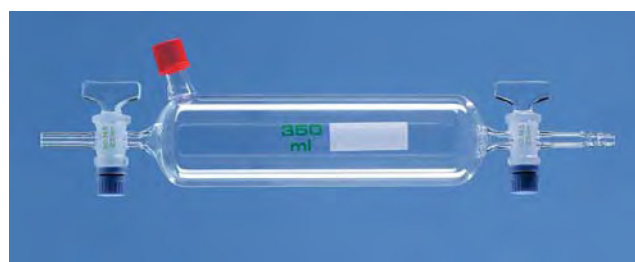

Gas Collecting Tube with Distributor Tube

### Gas Collecting Tubes

DURAN®. DIN 12473-1. With 2 stopcocks, one-way, 3NS/14, with retaining device. With capillary tube at one end (I-Ø 2,7 mm, O-Ø 8 mm) and nozzle (O-Ø 8 mm) at the other end. With inscription label. Available without or with distributor tube with thread GL 14.

Capacity ml	Description	SP pcs.	Cat. No.
150	without nozzle	1	5.6800.43
350	without nozzle	1	5.6800.52
500	without nozzle	1	5.6800.58
1000	without nozzle	1	5.6800.70
150	with nozzle	1	5.6801.43
350	with nozzle	1	5.6801.52
500	with nozzle	1	5.6801.58
1000	with nozzle	1	5.6801.70

Water Jet Pumps



Water Jet Pump to Friedrichs-Antlinger



Water Jet Pump

**Water Jet Pumps to Friedrichs-Antlinger**  
 DURAN®. Friedrichs-Antlinger, with spiral ejector.  
 High suction capacity.  
 Specifications at 4 bar water pressure:

- water consumption 10 l/min
- flow rate 400 ml/sec
- no return safety up to 1 kg/cm<sup>2</sup>
- ultimate pressure 16 mbar

Description	SP pcs.	Cat. No.
Water jet pump to Friedrichs-Antlinger	1	5.5800.03

**Water Jet Pumps**  
 DURAN®. Robust design. GL 18 male thread for water connector with hose nozzle Ø 11 mm.  
 Specifications at 4,5 bar water pressure and 12°C water temperature:

- water consumption approx. 340l/h
- ultimate pressure 16 mbar
- flow rate against atmospheric pressure: 950 l air/h

Description	SP pcs.	Cat. No.
Water jet pump	1	5.5860.00



Water Jet Pump to Wetzel, without No-return Valve




Water Jet Pump to Wetzel, with No-return Valve

**Water Jet Pumps to Wetzel**  
 DURAN®. Wetzel. Without or with no-return valve.  
 Specifications:

- water pressure min. 1,2 bar
- water consumption 300 l/h

Description	SP pcs.	Cat. No.
without no-return valve	1	5.5850.00
with no-return valve	1	5.5852.00



Water Connector

**Water Connectors**  
 With male thread GL 18 with sleeve nut R 3/4", PP and O-ring sealings 15 x 3 mm and 10 x 3 mm, nitrile rubber (NBR).

Description	SP pcs.	Cat. No.
Water Connector	1	5.5861.00



No-return Valve

**No-return Valves**  
 DURAN®. Standard design, no removable parts.

Description	SP pcs.	Cat. No.
No-return valve	1	5.5900.00


Centrifuge Tubes

**Centrifuge Tubes, ASTM, Cylindrical**

DURAN®. DIN 51793. ASTM D91 and ASTM D96. Capacity 100 ml (8"). Can be used up to RCA 700 (relative centrifuge acceleration). With conical bottom.

Graduation ml	Subdivision ml
0 - 0,5	0,1
0,5 - 2	0,1
2 - 3	0,2
3 - 5	0,5
5 - 10	1,0
10 - 25	5,0
25 - 100	25,0

Description	SP	Cat. No.
	pcs.	
Centrifuge tube, cylindrical	1	5.6750.00

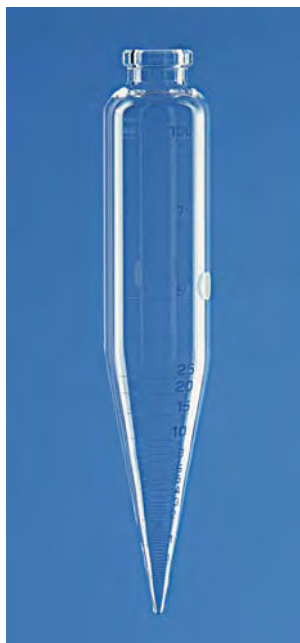

Centrifuge Tube, ASTM, Cylindrical

**Centrifuge Tubes, ASTM, Cylindrical**

DURAN®. ASTM D96. Capacity 100 ml (6"). Can be used up to RCA 700 (relative centrifuge acceleration). With conical bottom.

Graduation ml	Subdivision ml
0 - 0,5	0,1
0,5 - 2	0,1
2 - 3	0,2
3 - 5	0,5
5 - 10	1,0
10 - 25	5,0
25 - 100	25,0

With marks at 50 and 100 ml

Description	SP	Cat. No.
	pcs.	
Centrifuge tube, cylindrical	1	5.6750.03



Centrifuge Tube, ASTM, Cylindrical

**Centrifuge Tubes, ASTM, Pear-shaped**

DURAN®. ASTM D96. Capacity 100 ml. Can be used up to RCA 700 (relative centrifuge acceleration). With cylindrical bottom.

Graduation ml	Subdivision ml
0 - 1,5	0,1
1,5 - 3	0,5
3 - 5	0,5
5 - 10	1,0
10 - 25	5,0
25 - 100	25,0

With marks at 50 and 100 ml

Description	SP	Cat. No.
	pcs.	
Centrifuge tube, pear-shaped	1	5.6750.05




Centrifuge Tube, ASTM, Pear-shaped



Test Tubes



Test Tube, Round Bottom

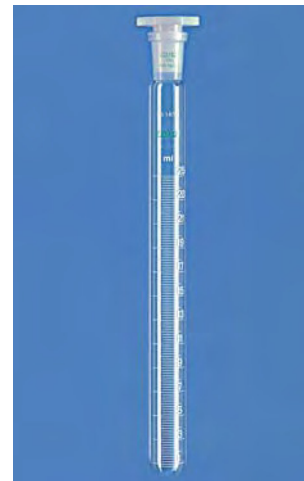

Test Tube with Ground Joint

Test Tubes, Round Bottom with NS

DURAN®. With NS-Socket. Available without stopper, with PE-stopper or hexagonal hollow glass stopper.

Socket NS	Ø x Height mm	Description	SP pcs.	Cat. No.
14/23	16 x 100	without stopper	1	5.7000.07
14/23	16 x 125	without stopper	1	5.7000.10
14/23	16 x 160	without stopper	1	5.7000.14
14/23	18 x 150	without stopper	1	5.7000.26
14/23	18 x 180	without stopper	1	5.7000.30
19/26	22 x 150	without stopper	1	5.7000.34
24/29	28 x 150	without stopper	1	5.7000.38
24/29	28 x 200	without stopper	1	5.7000.42
14/23	16 x 100	PE stopper	1	5.7001.07
14/23	16 x 125	PE stopper	1	5.7001.10
14/23	16 x 160	PE stopper	1	5.7001.14
14/23	18 x 150	PE stopper	1	5.7001.26
14/23	18 x 180	PE stopper	1	5.7001.30
19/26	22 x 150	PE stopper	1	5.7001.34
24/29	28 x 150	PE stopper	1	5.7001.38
24/29	28 x 200	PE stopper	1	5.7001.42
14/23	16 x 100	hexag. hollow stopper	1	5.7002.07
14/23	16 x 125	hexag. hollow stopper	1	5.7002.10
14/23	16 x 160	hexag. hollow stopper	1	5.7002.14
14/23	18 x 150	hexag. hollow stopper	1	5.7002.26
14/23	18 x 180	hexag. hollow stopper	1	5.7002.30
19/26	22 x 150	hexag. hollow stopper	1	5.7002.34
24/29	28 x 150	hexag. hollow stopper	1	5.7002.38
24/29	28 x 200	hexag. hollow stopper	1	5.7002.42

Test Tubes with Ground Joint

DURAN®. Graduation and inscription in high contrast enamel. With NS socket and PE stopper.

Socket NS	Ø x Height mm	Capacity ml	Subdiv. ml	SP pcs.	Cat. No.
12/21	15 x 165	10	0,1	1	5.7060.01
14/23	17 x 200	20	0,2	1	5.7060.02
14/23	17 x 220	25	0,2	1	5.7060.03
14/23	19 x 220	30	0,5	1	5.7060.04



Test Tube, Conical Bottom

Test Tubes, Conical Bottom with Ground Joint

DURAN®. With NS socket. Available without stopper, with PE stopper or hexagonal hollow glass stopper.

Socket NS	Ø x Height mm	Description	SP pcs.	Cat. No.
14/23	17 x 115	without stopper	1	5.7050.15
14/23	17 x 120	without stopper	1	5.7050.16
14/23	17 x 115	PE stopper	1	5.7051.15
14/23	17 x 120	PE stopper	1	5.7051.16
14/23	17 x 115	hexag. hollow stopper	1	5.7052.15
14/23	17 x 120	hexag. hollow stopper	1	5.7052.16

## Water Stills MonoDest

Lenz water stills guarantee optimum specifications:

- simple operation
- easy to clean without dismantling the apparatus
- compact design
- stainless steel heaters
- separate circuits for feed and cooling water
- low water consumption
- thermostatically controlled heating cutoff switch provides a high level of safety if the water supply is interrupted

How conductivity values are obtained:

The freshly produced distillate was measured directly at the outlet, in a closed system, during continuous flow, at a temperature of  $96 \pm 1^\circ\text{C}$ , without access of atmospheric air, temperature-compensated to  $25^\circ\text{C}$ . The conductivity of the feeding water was approx.  $800 \mu\text{S}/\text{cm}$ .

Scope of delivery MonoDest

- Basic unit with mains cable
- PVC tubing, 7 m, I-Ø 10 mm
- Tubing pinchcock for the PVC tubing



Water Still MonoDest 3000 E



Water Still MonoDest 3000 N

### Water Still MonoDest 3000 E

Ideal for applications requiring small quantities of pure water  
The particularly high water quality level with a conductivity of  $0,7 \mu\text{S}/\text{cm}$  is obtained by the special design of the condenser.  
The freshly obtained distillate is virtually free of dissolved gases, metals, salts and pyrogens.

Description	SP	Cat. No.
	pcs.	
MonoDest 3000 E	1	5.9000.40

### Water Still MonoDest 3000 N

The low-cost alternative to the MonoDest 3000 E.  
Recommended for applications where conductivity of  $1,5 \mu\text{S}/\text{cm}$  is sufficient.

Description	SP	Cat. No.
	pcs.	
MonoDest 3000 N	1	5.9000.30


## Water Stills MonoDest

Specifications	MonoDest 3000 E	MonoDest 3000 N
Power consumption	3000 W	3000 W
Rated current	14 A	14 A
Voltage	220-240 V/50-60 Hz	220-240 V/50-60 Hz
<b>Tab water connection:</b>		
- Minimum pressure	2 bar	2 bar
<b>Distillate output</b>		
- with tap water	4,2 l/h	4,2 l/h
- with deionized water	4,0 l/h	-
Conductivity of distillate referred to 25°C	0,7 µS/cm	1,5 µS/cm
Distillate temperature	96 °C	96 °C
<b>Cooling water consumption</b>		
- with tap water	45 l/h	45 l/h
- with deionized water	55 l/h	-
<b>Cooling water temperature:</b>		
- Inlet	16 °C	16 °C
- Outlet		
- with tap water	64 °C	64 °C
- with deionized water	48 °C	-
Heater	stainless steel 1.4529	stainless steel 1.4529
Glass parts	DURAN®	DURAN®
Height required (without distillate bottle)	750 mm	600 mm
Weight	6 kg	6 kg

### Accessories and Spare Parts for Water Stills MonoDest 3000

Description	SP pcs.	Cat. No.
Glass part only, DURAN®, MonoDest 3000 E	1	5.9010.40
Glass part only, DURAN®, MonoDest 3000 N	1	5.9010.30
O-ring, silicone, 100 x 5 mm for glass part	1	5.9015.00
Flange clamp (metal), aperture angle 60°, NW 90/10, for glass part	1	5.9015.02
Screw-cap GL 14	1	1.3200.14
Base complete with heater and mains cable	1	5.9020.00
Receiver bottle for distillate, 5 l, complete with stopcock (PTFE plug), joint clip and PTFE ground joint sleeve	1	5.9006.00
Receiver bottle only, borosilicate glass, 5 l, neck NS 45/40, socket NS 29/32	1	5.9006.01
Stopcock DURAN®, cone NS 29/32, PTFE plug, nominal size 4 NS, bore 4 mm	1	5.9006.03
PTFE ground joint sleeves NS 29/32	10	1.1015.29
Joint clip NS 29/32	1	1.1032.29
Bottle top for receiver bottle, complete	1	5.9007.00
Glass part only, DURAN®, NS 45/40 for bottle top	1	5.9007.01
PTFE ground joint sleeves NS 45/40	10	1.1015.45
Joint clip NS 45/40	1	1.1032.45
Silicone tubing, 100 mm, I-Ø 10 mm	1	5.9007.03
Silicone tubing, length according to order, I-Ø 10 mm	1	5.9008.03
PVC tubing, length according to order, I-Ø 10 mm	1	5.9008.01
Hosecock tubing clamp for tubing with O-Ø to 18 mm	1	5.9008.05
Funnel, polypropylene, Ø 120 mm	1	5.9008.06



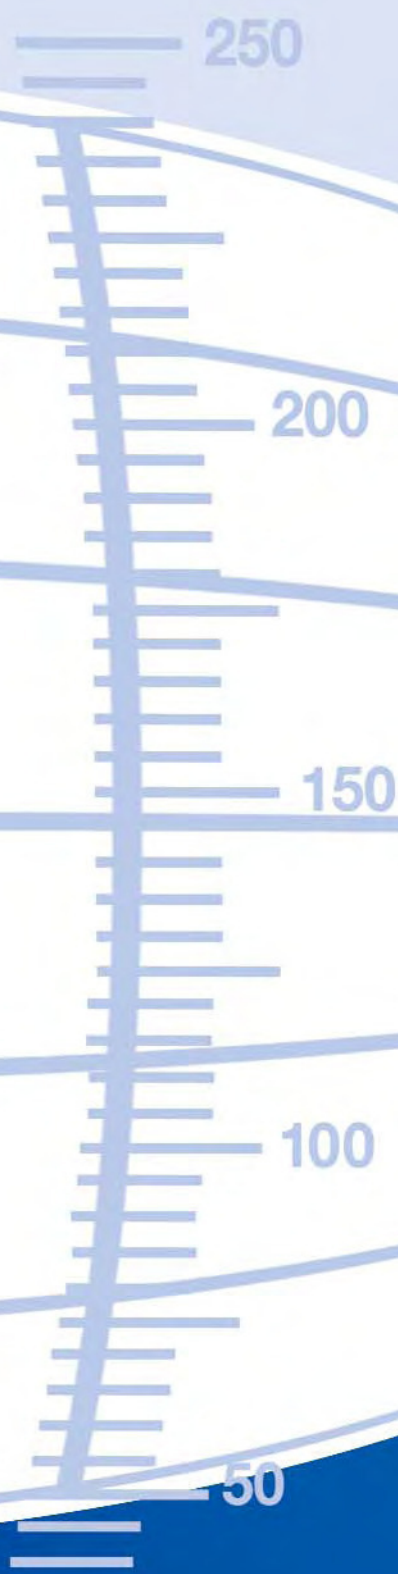


Beakers / Flasks with Beaded Rim




Beaker, Low Form



Beaker, High Form

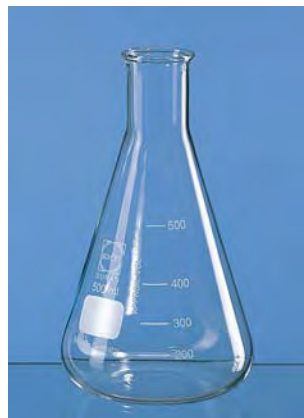

Erlenmeyer Flask, Narrow Neck

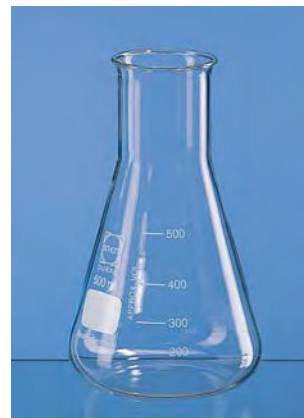

Erlenmeyer Flask, Wide Neck

Beakers, Low Form

DURAN®. DIN 12331/ ISO 3819. With graduation and spout.

Capacity ml	Ø x H mm	Description	SP pcs.	Cat. No.
5	22 x 30	(1)	10	7.0010.10
10	26 x 35	(1)	10	7.0010.13
25	34 x 50	DIN/ISO	10	7.0010.22
50	42 x 60	DIN/ISO	10	7.0010.28
100	50 x 70	DIN/ISO	10	7.0010.37
150	60 x 80	DIN/ISO	10	7.0010.43
250	70 x 95	DIN/ISO	10	7.0010.49
400	80 x 110	DIN/ISO	10	7.0010.55
600	90 x 125	DIN/ISO	10	7.0010.61
800	100 x 135	DIN/ISO	10	7.0010.67
1000	105 x 145	DIN/ISO	10	7.0010.70
2000	132 x 185	DIN/ISO	10	7.0010.73
3000	152 x 210	DIN/ISO	4	7.0010.76
5000	170 x 270	DIN/ISO	1	7.0010.82
10000	217 x 350	(1), (2)	1	7.0010.88

(1) without graduation

(2) not to DIN and ISO

Erlenmeyer Flasks, Narrow Neck

DURAN®. DIN 12380/ ISO 1773. With graduation.

Capacity ml	Flask-Ø mm	Neck-Ø mm	Height mm	SP pcs.	Cat. No.
25	42	22	75	10	7.0200.22
50	51	22	90	10	7.0200.28
100	64	22	105	10	7.0200.37
200	79	34	131	10	7.0200.46
250	85	34	145	10	7.0200.49
300	87	34	156	10	7.0200.52
500	105	34	180	10	7.0200.58
1000	131	42	220	10	7.0200.70
2000	166	50	280	10	7.0200.73
3000	187	51	310	2	7.0200.76
5000	220	51	365	1	7.0200.82

Beakers, High Form

DURAN®. DIN 12331/ ISO 3819. With graduation and spout.


Capacity ml	Ø x H mm	SP pcs.	Cat. No.
50	38 x 70	10	7.0040.28
100	48 x 80	10	7.0040.37
150	54 x 95	10	7.0040.43
250	60 x 120	10	7.0040.49
400	70 x 130	10	7.0040.55
600	80 x 150	10	7.0040.61
800	90 x 175	10	7.0040.67
1000	95 x 185	10	7.0040.70
2000	120 x 240	10	7.0040.73
3000	135 x 280	2	7.0040.76

Erlenmeyer Flasks, Wide Neck

DURAN®. DIN 12380/ ISO 1773. With graduation.

Capacity ml	Flask-Ø mm	Neck-Ø mm	Height mm	SP pcs.	Cat. No.
25	43	31	70	10	7.0250.22
50	51	34	85	10	7.0250.28
100	64	34	105	10	7.0250.37
200	79	50	131	10	7.0250.46
250	85	50	140	10	7.0250.49
300	87	50	156	10	7.0250.52
500	105	50	175	10	7.0250.58
1000	131	50	220	10	7.0250.70
2000	153	72	276	10	7.0250.73

Flasks with Beaded Rim

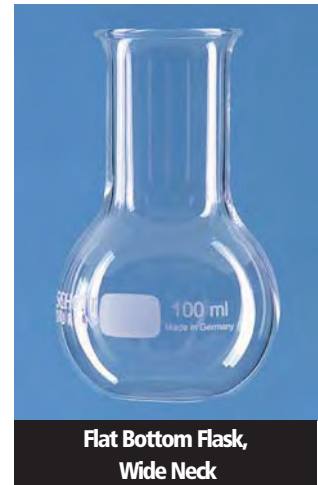

**Round Bottom Flasks, Narrow Neck**  
DURAN®. DIN 12347/ ISO 1773. With beaded rim.

Capacity ml	Flask-Ø mm	Neck-Ø mm	Description	SP pcs.	Cat. No.
50	51	26	DIN/ISO	10	7.0300.28
100	64	26	DIN/ISO	10	7.0300.37
250	85	34	DIN/ISO	10	7.0300.49
500	105	34	(1)	10	7.0300.58
1000	131	42	DIN/ISO	10	7.0300.70
2000	166	42	(1)	10	7.0300.73
3000	185	50	(1)	1	7.0300.76
4000	207	50	(1)	1	7.0300.79
5000	223	50	(1)	1	7.0300.82
6000	236	51	(1)	1	7.0300.85
10000	279	65	(1)	1	7.0300.88
20000	345	76	(2)	1	7.0300.94

(1) not to ISO  
(2) in addition to DIN and ISO range

**Flat Bottom Flasks, Narrow Neck**  
DURAN®. DIN 12347/ ISO 1773. With beaded rim.

Capacity ml	Flask-Ø mm	Neck-Ø mm	Description	SP pcs.	Cat. No.
50	51	34	DIN/ISO	10	7.0450.28
100	64	22	(1)	10	7.0450.37
250	85	35	DIN/ISO	10	7.0450.49
500	105	34	(1)	10	7.0450.58
1000	131	42	DIN/ISO	10	7.0450.70
2000	166	42	(1)	10	7.0450.73
3000	185	50	(1)	1	7.0450.76
4000	207	50	(1)	1	7.0450.79
5000	223	50	(1)	1	7.0450.82
6000	237	65	(1), (2)	1	7.0450.85
10000	280	65	(1), (2)	1	7.0450.88

(1) in addition to DIN range  
(2) with strengthened rim

**Round Bottom Flasks, Wide Neck**  
DURAN®. DIN 12347. With beaded rim.

Capacity ml	Flask-Ø mm	Neck-Ø mm	SP pcs.	Cat. No.
50	51	34	10	7.0350.28
100	64	35	10	7.0350.37
250	85	51	10	7.0350.49
500	105	50	10	7.0350.58
1000	131	50	10	7.0350.70
1000	131	65	10	7.0350.71
2000	166	76	10	7.0350.72
2000	166	50	10	7.0350.73
3000	185	65	10	7.0350.76
4000	206	76	10	7.0350.79
5000	223	65	1	7.0350.82
6000	236	89	1	7.0350.84
6000	236	65	1	7.0350.85
10000	279	89	1	7.0350.88
20000	345	89	1	7.0350.94

**Flat Bottom Flasks, Wide Neck**  
DURAN®. DIN 12347. With beaded rim.

Capacity ml	Flask-Ø mm	Neck-Ø mm	Description	SP pcs.	Cat. No.
50	51	35	DIN/ISO	10	7.0500.28
100	64	34	DIN/ISO	10	7.0500.37
250	85	50	DIN/ISO	10	7.0500.49
500	103	50	DIN/ISO	10	7.0500.58
1000	131	50	DIN/ISO	10	7.0500.70
2000	166	50	(1), (2)	10	7.0500.73
2000	166	76	DIN/ISO	10	7.0500.74

(1) in addition to DIN range  
(2) with strengthened rim

Laboratory Bottles

Laboratory Bottles

DURAN®. With DIN thread, ISO 4796. Studded base for stability and abrasion resistance. With graduation and inscription label. With screw cap and pouring ring, PP, blue.

Capacity ml	Ø x H mm	Thread GL	SP pcs.	Cat. No.
25	36 x 70	25	10	7.1050.22
50	46 x 87	32	10	7.1050.28
100	56 x 100	45	10	7.1050.37
250	70 x 138	45	10	7.1050.49
500	86 x 176	45	10	7.1050.58
1000	101 x 225	45	10	7.1050.70
2000	136 x 260	45	10	7.1050.73
5000	182 x 330	45	1	7.1050.82
10000	227 x 410	45	1	7.1050.88
15000	268 x 445	45	1	7.1050.91
20000	288 x 505	45	1	7.1050.94



Laboratory Bottle



Screw-cap



Screw-cap

Screw-caps

PP, blue, with lip sealing.  
Resistant up to 140 °C.

Thread GL	SP pcs.	Cat. No.
25	1	7.1051.00
32	1	7.1052.00
45	1	7.1053.00


Screw-caps

PBT, red, with PTFE coated sealing.  
Resistant up to 180 °C.

Thread GL	SP pcs.	Cat. No.
25	1	7.1055.02
32	1	7.1055.01
45	1	7.1055.00



Pouring Ring



Pouring Ring

Pouring Rings

PP, blue. Resistant up to 140 °C.

Thread GL	SP pcs.	Cat. No.
32	1	7.1054.01
45	1	7.1054.00

Pouring Rings

ETFE, red. Resistant up to 180 °C.

Thread GL	SP pcs.	Cat. No.
32	1	7.1056.01
45	1	7.1056.00



Glass Filtration Instruments



Filter Plates



Filter Crucible

Filter Plates

Centralised, rim not fused.

Filter Plate-Ø mm	Porosity	SP pcs.	Cat. No.
10	0	10	7.1800.10
10	1	10	7.1801.10
10	2	10	7.1802.10
10	3	10	7.1803.10
10	4	10	7.1804.10
20	0	10	7.1800.20
20	1	10	7.1801.20
20	2	10	7.1802.20
20	3	10	7.1803.20
20	4	10	7.1804.20
30	0	10	7.1800.30
30	1	10	7.1801.30
30	2	10	7.1802.30
30	3	10	7.1803.30
30	4	10	7.1804.30
40	0	10	7.1800.40
40	1	10	7.1801.40
40	2	10	7.1802.40
40	3	10	7.1803.40
40	4	10	7.1804.40
50	0	10	7.1800.50
50	1	10	7.1801.50
50	2	10	7.1802.50
50	3	10	7.1803.50
50	4	10	7.1804.50
60	0	10	7.1800.60
60	1	10	7.1801.60
60	2	10	7.1802.60
60	3	10	7.1803.60
60	4	10	7.1804.60

Filter Crucibles

Capacity ml	Porosity	Filter Plate-Ø mm	SP pcs.	Cat. No.
8	2	20	1	7.1852.20
8	3	20	1	7.1853.20
8	4	20	1	7.1854.20
15	1	23	1	7.1851.23
15	2	23	1	7.1852.23
15	3	23	1	7.1853.23
15	4	23	1	7.1854.23
30	1	30	1	7.1851.30
30	2	30	1	7.1852.30
30	3	30	1	7.1853.30
30	4	30	1	7.1854.30
50	1	40	1	7.1851.40
50	2	40	1	7.1852.40
50	3	40	1	7.1853.40
50	4	40	1	7.1854.40



Rubber Sleeves

Rubber Sleeves

Natural rubber. Fits filter crucibles.

O-Ø mm	SP pcs.	Cat. No.
26	1	7.1870.26
33	1	7.1870.33
41	1	7.1870.41
49	1	7.1870.49

Glass Filtration Instruments



Filter Adapter



Filter Funnel

Filter Adapters

Fits filter crucibles.

I-Ø top mm	Height mm	SP pcs.	Cat. No.
27	110	1	7.1890.27
34	110	1	7.1890.34
41	125	1	7.1890.41
50	132	1	7.1890.50

Filter Funnels

Capacity ml	Porosity	Filter Plate-Ø mm	Height mm	SP pcs.	Cat. No.
50	1	35	130	1	7.1951.28
50	2	35	130	1	7.1952.28
50	3	35	130	1	7.1953.28
50	4	35	130	1	7.1954.28
75	1	45	130	1	7.1951.34
75	2	45	130	1	7.1952.34
75	3	45	130	1	7.1953.34
75	4	45	130	1	7.1954.34
125	1	60	140	1	7.1951.40
125	2	60	140	1	7.1952.40
125	3	60	140	1	7.1953.40
125	4	60	140	1	7.1954.40
500	1	95	200	1	7.1951.58
500	2	95	200	1	7.1952.58
500	3	95	200	1	7.1953.58
500	4	95	200	1	7.1954.28
1000	1	120	320	1	7.1951.70
1000	2	120	320	1	7.1952.70
1000	3	120	320	1	7.1953.70
1000	4	120	320	1	7.1954.79
4000	1	175	400	1	7.1951.79
4000	2	175	400	1	7.1952.79
4000	3	175	400	1	7.1953.79
4000	4	175	400	1	7.1954.79



Micro Filter Funnel

Micro Filter Funnels

Capacity ml	Porosity	Tube O-Ø mm	Filter Plate-Ø mm	SP pcs.	Cat. No.
2	0	6	10	1	7.1900.10
2	1	6	10	1	7.1901.10
2	2	6	10	1	7.1902.10
2	3	6	10	1	7.1903.10
2	4	6	10	1	7.1904.10



Filter Funnel, Conical


Filter Funnels, Conical					
Capacity ml	Porosity	Filter Plate-Ø mm	Height mm	SP pcs.	Cat. No.
25	3	25	100	1	7.2003.25
25	4	25	100	1	7.2004.25



Filter Plug


Filter Plugs			
Cylindrical, without tube.			
Porosity	Plug-Ø x Length mm	SP pcs.	Cat. No.
0	9 x 20	1	7.2050.20
1	9 x 20	1	7.2051.20
2	9 x 20	1	7.2052.20
3	9 x 20	1	7.2053.20
4	9 x 20	1	7.2054.20
0	13 x 25	1	7.2060.25
1	13 x 25	1	7.2061.25
2	13 x 25	1	7.2062.25
3	13 x 25	1	7.2063.25
4	13 x 25	1	7.2064.25

Filter Plugs			
Cylindrical, with tube. Tube-Ø 8 mm.			
Total length 210 mm.			
Porosity	Plug-Ø x Length mm	SP pcs.	Cat. No.
0	9 x 20	1	7.2080.20
1	9 x 20	1	7.2081.20
2	9 x 20	1	7.2082.20
3	9 x 20	1	7.2083.20
4	9 x 20	1	7.2084.20
0	13 x 25	1	7.2090.25
1	13 x 25	1	7.2091.25
2	13 x 25	1	7.2092.25
3	13 x 25	1	7.2093.25
4	13 x 25	1	7.2094.25

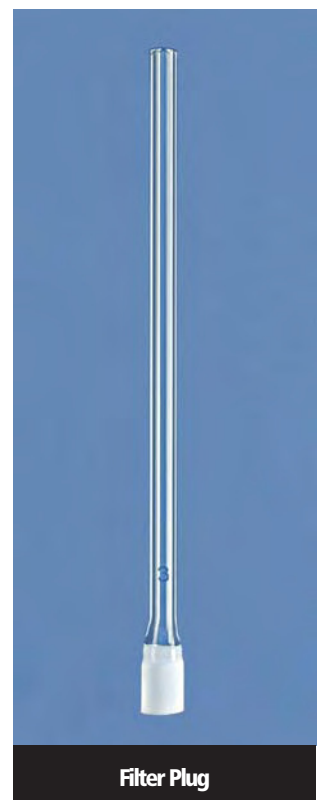


Filter Plug

Glass Filtration Instruments

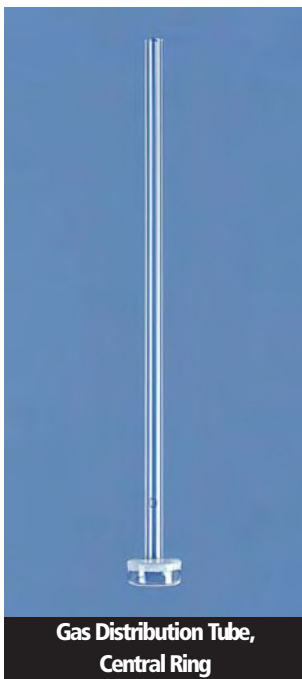


Gas Distribution Tubes, Lateral Ring					
Ring-Ø mm	Porosity	Tube O-Ø mm	Height mm	SP pcs.	Cat. No.
22	0	6	250	1	7.2110.25
22	1	6	250	1	7.2111.25
22	2	6	250	1	7.2112.25

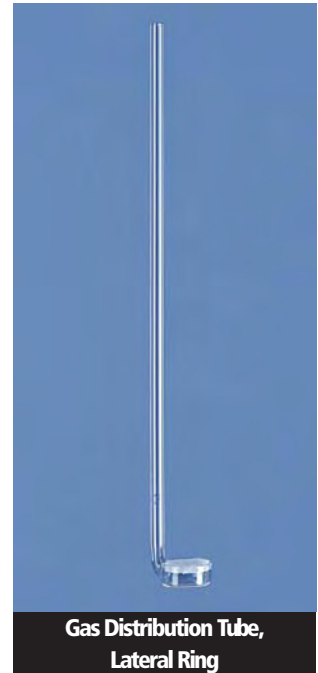

Gas Distribution Tubes, Central Ring					
Ring-Ø mm	Porosity	Tube O-Ø mm	Height mm	SP pcs.	Cat. No.
25	0	9	250	1	7.2120.25
25	1	9	250	1	7.2121.25
25	2	9	250	1	7.2122.25



Filter Tubes to Allihn					
Porosity	Capacity ml	Tube O-Ø mm	Filter Plate-Ø mm	SP pcs.	Cat. No.
1	30	9	20	1	7.2200.01
2	30	9	20	1	7.2200.02
3	30	9	20	1	7.2200.03
4	30	9	20	1	7.2200.04

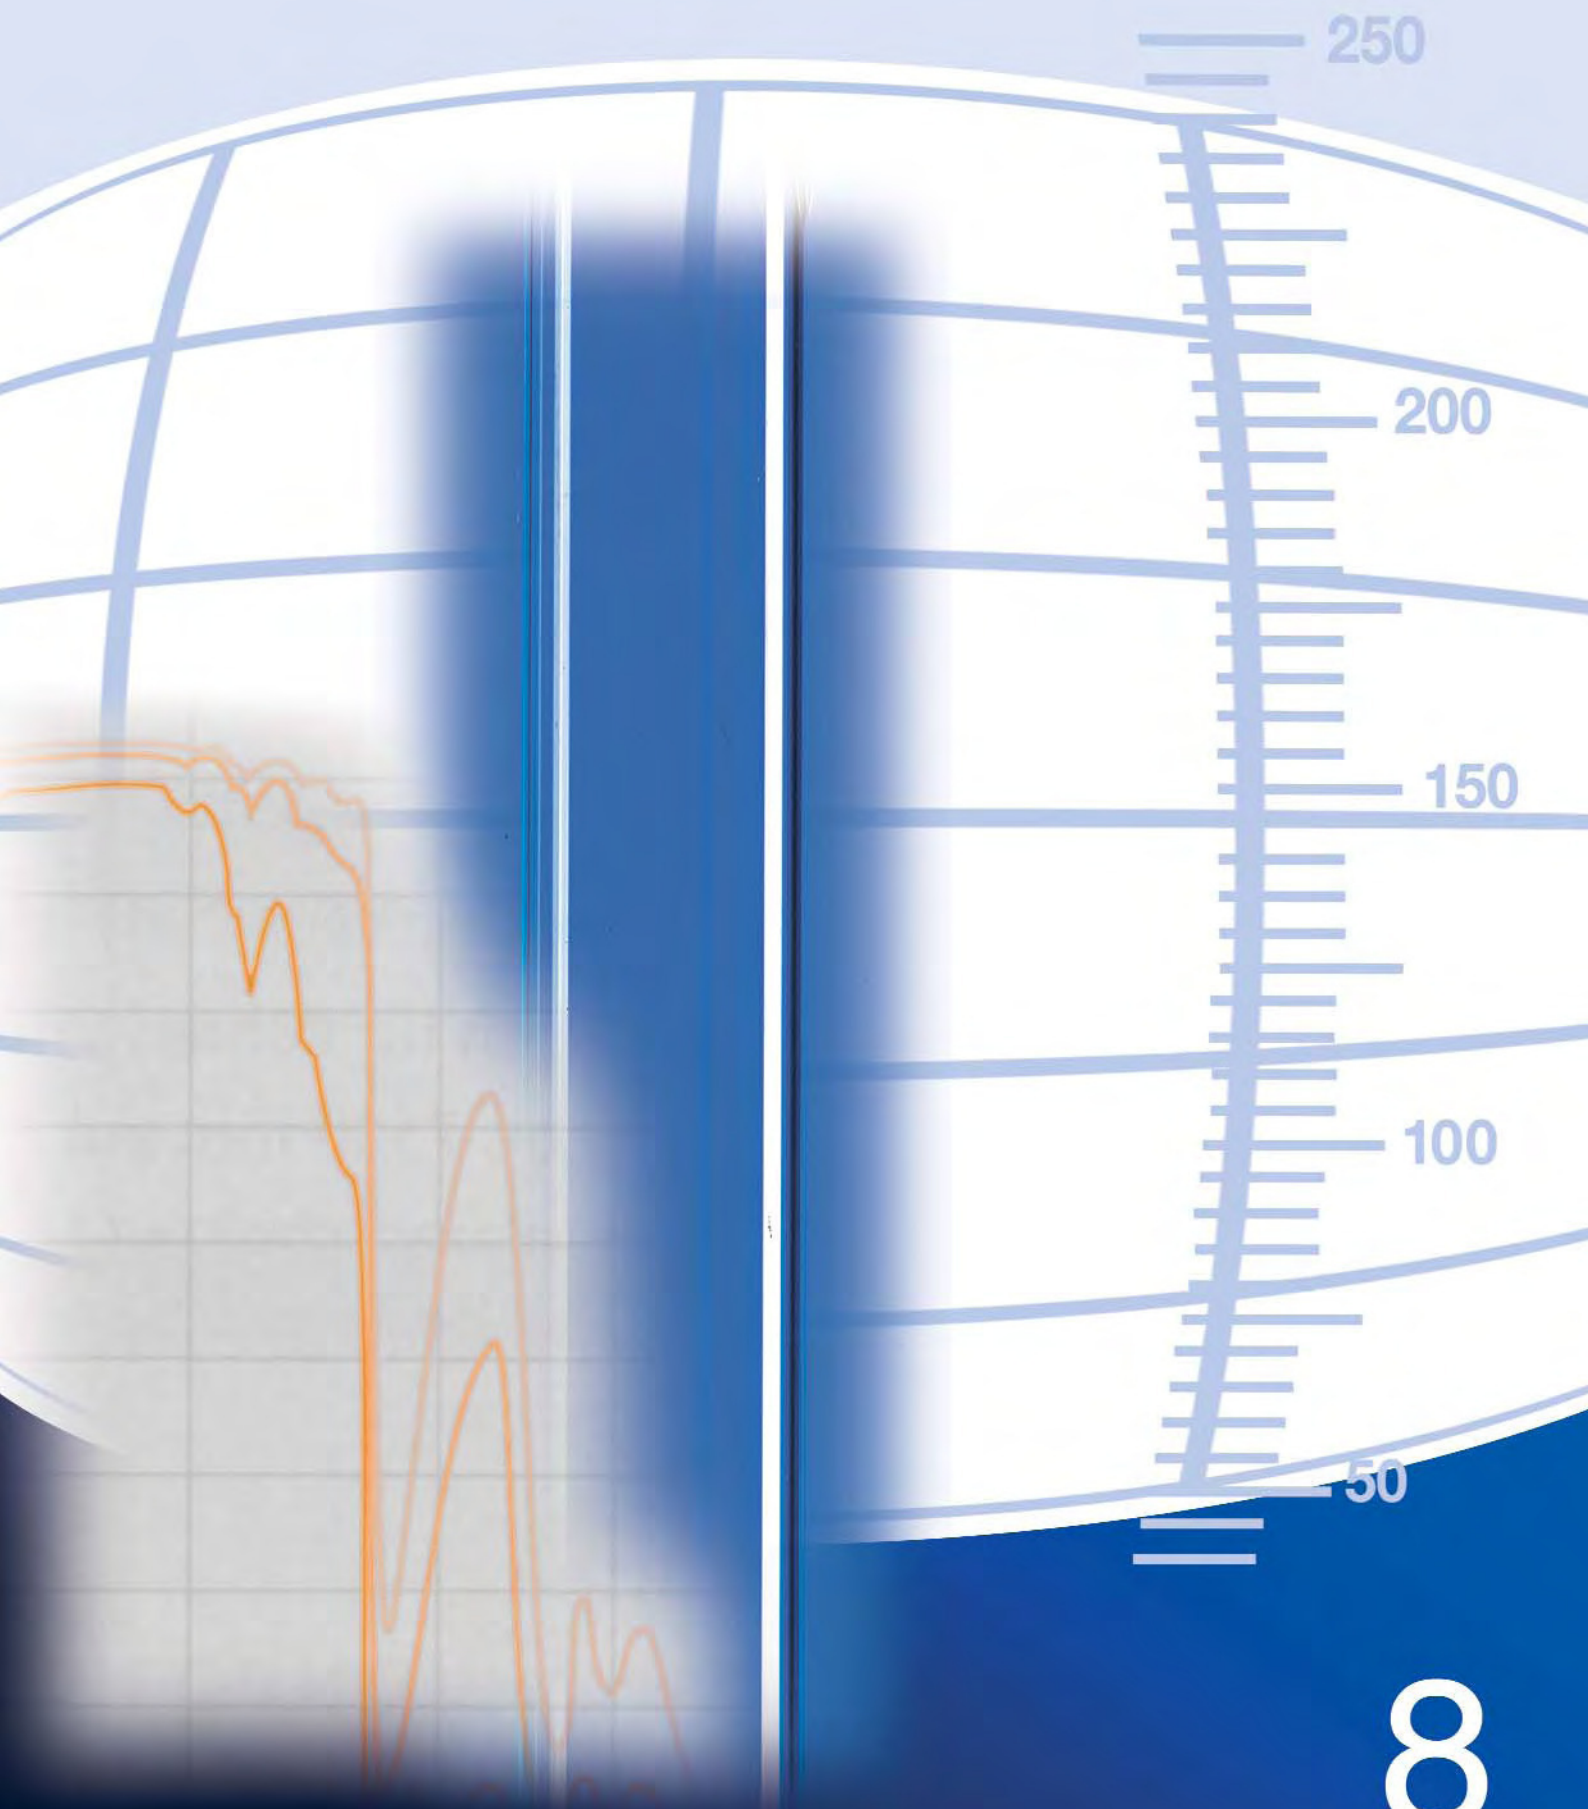

## Information about Filter Plates and Glass Filtration Instruments

### Production Process

Glass filters are made of borosilicate glass 3.3 (DURAN®), according to DIN/ISO 3585. Base material for filter discs is sintered glass grit. By a special grinding procedure, at first accurately defined grit sizes are pre-processed. In an afterwards applied high-temperature sintering-process, all surfaces of the separate glass-bodies are melted at their points of contact

### Properties

The sintering-process produces a porous filter product with a homogeneous appearance and a large inner surface. This product has excellent mechanical properties and a high thermal capacity, as well as a high resistance against most chemicals.







### Excellent Purity

All glass filters are made of pure, high-grade borosilicate glass 3.3 without additional binding agents and can be smelt with all known laboratory glasses in this quality.

### Porosity Classes

Glass filters are characterized by their pore-size in porosity classes from 0 to 5. Measurement of the porosity takes place through a bubble point process according to Bechthold. The following table provides an overview of porosity areas as well as their main fields of application. The denoted pore size refers to the respective largest pore of a disc. Pore sizes mark also the minimum diameter of particles which can just be held back during filtration.

### Porosity Classes - Technical Information

	Porosity	ISO 4793	Nominal pore size	Examples of application
	0	P 250	160-250 µm	Gas distribution, filtration of coarse deposits, gas distribution in liquids.
	1	p 160	100-160 µm	Filtration of coarse deposits, gas distribution in liquids, rough gas filtration, extractors for coarse materials, mats for filterlayers against gelatinous deposits.
	2	P 100	40-100 µm	Preparative fine filtration, mercury filtration, preparative operations with crystalline deposits.
	3	P 40	13-40 µm	Analytical filtration, preparative operations with fine deposits, filtration in cellulose chemistry, refined gas filtration, extraction instruments for fine-grained materials.
	4	P 16	10-16 µm	Analytical precision filtration and operations with very fine deposits, as check and stop valve for mercury.
	5	P 1,6	1,0-1,6 µm	Filtration of bacteria, sterile filtration.

### Flow Rates and Pressure Drop

The flow rates of liquids and the pressure drop of gases depend on:

- filter size
- filter porosity
- pressure and vacuum properties of the apparatus
- physical properties of the sample.

Flow rates of liquids and drop in pressure of gases are functions of:

- diameter of the filter
- porosity of the filter
- relation of pressure/vacuum in the apparatus
- physical properties of the medium to be filtered.

To determine the possible applications of glass filter instruments and to choose the best apparatus for the work intended, it is necessary to know the flow rates of liquids and gases. Please use the diagrams on the next page which show data for water and air. The data apply to filter discs of 30 mm diameter with average properties and usually effective filter area

and thickness, as well as pore sizes. The flow rates for other diameters can easily be calculated by multiplying this data by the conversion factor.


### Flow Rates

Filter disc Ø mm	Conversion factor
10	0.13
20	0.55
30	1.00
40	1.50
50	2.50
60	4.30
90	6.80
120	9.70
175	15.00


### Informations for the Application of Glass Filters and Instruments

## Information about Filter Plates and Glass Filtration Instruments

Flow rate of dry air [ml/min] through a filter plate of Ø 30 mm in relation to the pressure difference [mbar].

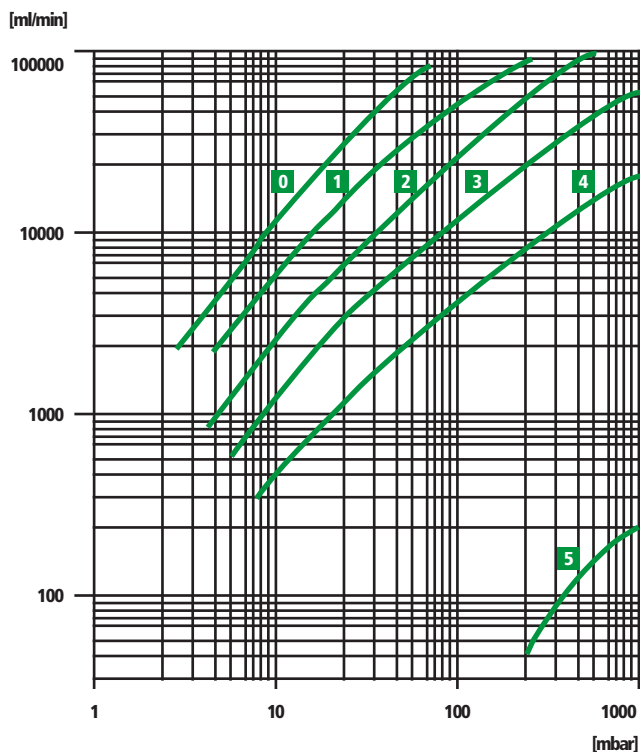

Flow rate of water [ml/min] through a filter plate of Ø 30 mm in relation to the pressure difference [mbar].

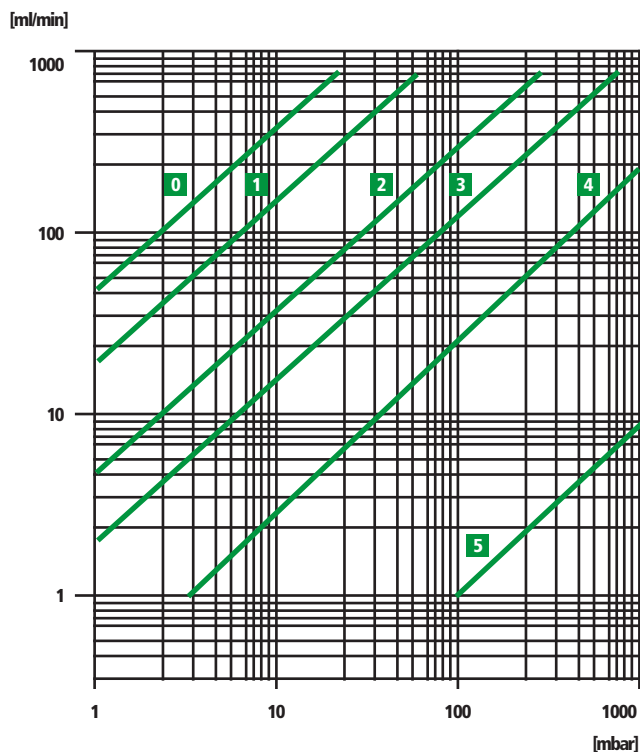

### Prime Cleaning

Before using a glass filter apparatus for the first time, it should be cleared of all dust and dirt particles. For that you use hot hydrochloric acid, followed by several steps of distilled water sucked under good vacuum through the filter disc..

### Mechanical Cleaning

Glass filter instruments have to be cleaned at once after usage, to increase their life-span. If the pores of the filter disc are clean, it is sufficient to spray the surface with water and to clean it with a brush or rubber spatula. If the pores are contaminated, a cleaning with water or rinsing solution in reverse filtration direction is absolutely necessary. 1 bar must not be exceeded. After that a reverse sparging with pure air dries and cleans the filter disc additionally.

### Chemical Cleaning

If there are still clogged pores after a mechanical cleaning, a careful chemical cleaning is advisable. Depending on the contamination different solutions may have to be used. Afterwards you should carefully rinse the filter discs with water.

### Drying and Sterilization

To prevent tensions between filter and vessel, you have to avoid temperature shocks, which can lead to breakages in the filter apparatus. Heating and cooling of glass filter instruments have to be slow and even.

### Pressure- and Vacuum Resistance

Pressure- and vacuum resistance cannot be guaranteed because of the material. Even smallest surface damage of the glass, like scratches, can lead to a stability loss.

### Temperature Resistance

The maximum temperature is 500°C. Glass filter instruments must never be subjected to sudden temperature changes. Furthermore, it is necessary to observe the designated heating and cooling rates for borosilicate glass 3.3 to prevent permanent tension in the glass.

### Special Notes

An increase in pore size is unavoidable with filtration of phosphoric acid, hydrofluoric acid and hot bases. These media corrode the surface and must not be used as cleaning solutions. Their usage decreases the life-span of glass filter instruments immensely.

## Technical Information about Laboratory Glass DURAN®

Beakers, Erlenmeyer flasks, round bottom flasks and test tubes, assemblies of flasks, coolers, distillation links and other well known glass components characterise the image of the chemical laboratory. Fuming liquids in different colours bubble and sizzle in vessels and tubes. Glass has a long tradition in laboratories and was continuously improved to fulfill the growing demands of chemical laboratories:

- excellent chemical resistance
- minimum ion transfer
- maximum constancy of shape and volume
- heat resistance and temperature shock resistance
- transparency

### What is glass?

Glass is an anorganic melting product which solidifies without crystallisation. The basic components are network forming and network changing components. Typical forming components are  $\text{SiO}_2$ ,  $\text{B}_2\text{O}_3$ ,  $\text{P}_2\text{O}_5$  and depending on certain conditions  $\text{Al}_2\text{O}_3$ . These components are able to embed a certain concentration of metal oxides without influencing the glass character. The metal oxides define and modify the specific properties of the type of glass.

Chemical substances which solidify glass-like show mixed types of chemical bindings (atom binding and ion binding). Already when melted they show a tendency to link diffuse without any crystalline net. The amorphous network of glass is constructed by the network forming components and the embedded network changing components (ions).

### Types of glass

For the special demands of laboratories different glasses are developed which belong to two main classes:

- Borosilicate glass and
- Soda-lime glass

Depending on the composites of the raw material the chemical and physical properties can be varied.

Soda-lime glass (e.g. AR®-Glass) provides good chemical resistance and physical properties. It is applicable for products with short-term contact with chemicals and in cases where no extreme temperatures are applied (e.g. pipettes, test tubes).

Borosilicate glass with its optimised properties is almost universal applicable. Glass types like e.g. SUPRAX® and DURAN® borosilicate glass. Because of the extraordinary heat resistance, temperature shock resistance and mechanical stability as well as the excellent chemical resistance DURAN® - laboratory glass is well known in almost any laboratory worldwide since decades of years.

The following table shows the main properties of different types of typical laboratory glass brands:

	DURAN® Boro 3.3	FOLAX® Boro 4.1	AR-GLAS® Soda-lime
Lin. coefficient of expansion 20/300 °C, 10 <sup>-6</sup> K <sup>-1</sup>	3,3	4,1	9,1
Transformation Temperature °C	525	555	525
Water resistance DIN-ISO 719	1	1	3
Acid resistance DIN12116	1	1	1
Alkali resistance DIN 52322 / ISO 695	2	2	2

### DURAN®

Due to its unsurpassed chemical, physical and thermal properties, DURAN® laboratory glass gained a solid and dominant position in laboratories. Considering DURAN® as example its material properties are described below.

DURAN® is a borosilicate glass type 3.3 as specified in international standard (DIN-ISO 3585).

### Chemical Composition:


$\text{SiO}_2$	81 % by weight
$\text{B}_2\text{O}_3$	13 % by weight
$\text{Na}_2\text{O}/\text{K}_2\text{O}$	4 % by weight
$\text{Al}_2\text{O}_3$	2 % by weight

Choice raw materials guarantee that DURAN® is virtually free from contamination, especially heavy metals. Even with analyses in the ppm-range, contaminations are eliminated.

### Chemical Properties:

Exposure to water and acids only result in the leaching out of very small amounts of mainly univalent ions from the glass. The resultant very thin layer of silica with few pores in it that is formed on the glass surface, inhibits further attacks.

DURAN® has very high resistance against water, neutral and acid salt solutions, strong acids and mixtures thereof, and also chlorine, bromine, iodine and organic substances. Only hydrofluoric acid, solutions containing fluorides such as ammonium fluoride, very hot phosphoric acid and strongly alkaline solutions attack the surface of the glass to an increasing extent at higher concentrations and temperatures.

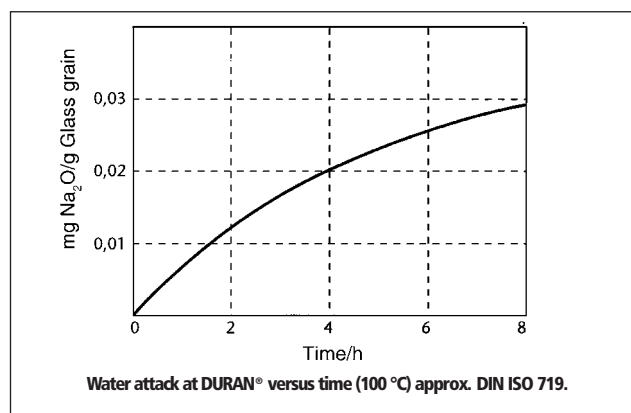

### Hydrolytic Resistance:

DURAN® is classified in the highest hydrolytic resistance class 1. Hydrolytic resistance is determined by two methods at 98°C and 121°C:

1. Hydrolytic resistance according to DIN-ISO 719 (98°C)  
DURAN® belongs to glass grain method class ISO 719-HGB 1, since there is used only up to 0.026 ml HCl (0.01 mol) of 1 g DURAN® glass grain after one hour heating at 98 °C in water, according to the grain-titration method DIN 12111/ISO 719. This corresponds to an alkali release of 0.008 mg Na<sub>2</sub>O per 1 g glass grain.

2. Hydrolytic resistance according to DIN-ISO 720 (121°C). Grain hydrolytic resistance class ISO 720 HGA 1, method at 121°C

DURAN® is a neutral glass with a high hydrolytic resistance of glass type 1, and according to DAB 10 of the European Pharmacopoe and USP 23, DURAN® is food safe.



## Technical Information about Laboratory Glass DURAN®

### Acid Resistance:


DURAN® is classified in the highest acid class 1. Acid resistance can be determined by two methods.:

#### 1. Acid resistance according to DIN-ISO 12116

The acid removal is measured at fire finished glass surfaces, as a time dependent weight loss under the exposure of 18% hydrochloric acid. After a boiling period of three hours this removal with DURAN® is only 0,3 mg/dm<sup>2</sup>.

#### 2. Acid resistance according to DIN-ISO 1776

The attacked layer thickness of the glass is examined in dependency of the type of acid and its concentration. The results for four acids are shown in the diagram below. The maximum attack occurs at acid ranges of 4-7n. At higher concentrations, the reaction rate decreases significantly, so that the layer thicknesses which are attacked are only in the range of a few thousand µm after years. Thus, the mechanisms of acid attack are not relevant for the wall thicknesses of laboratory glasses used in practice.

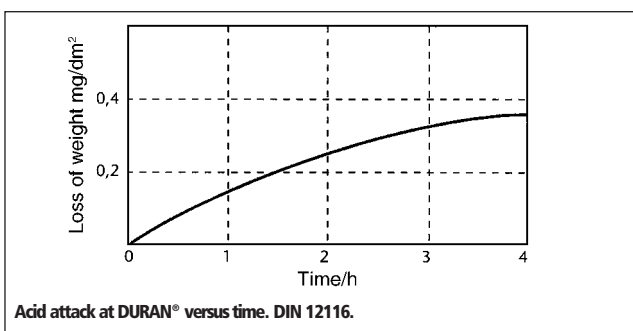




ing hoods and DURAN® is suitable for use in microwaves. DURAN® can be cooled down to -192 °C, which means that it is also suitable for use in liquid air. Generally DURAN® products are recommended for use down to -70 °C.

When freezing substances in e.g. DURAN® bottles or test tubes, the container should only be filled to a maximum of 3/4 of its capacity and it must be frozen on the slant (45°).

With all thermal processes the threshold value of the thermal shock resistance (below) has to be taken into account.

### Thermal Shock Resistance:

DURAN® resists sudden temperature changes from hot to cold and vice versa up to  $\Delta T = 100K$ . DURAN® does not break when boiling water is poured into it at room temperature. The thermal shock resistance exceeds that of ordinary glass (e.g. soda-lime-silicate glass) by a factor of three.

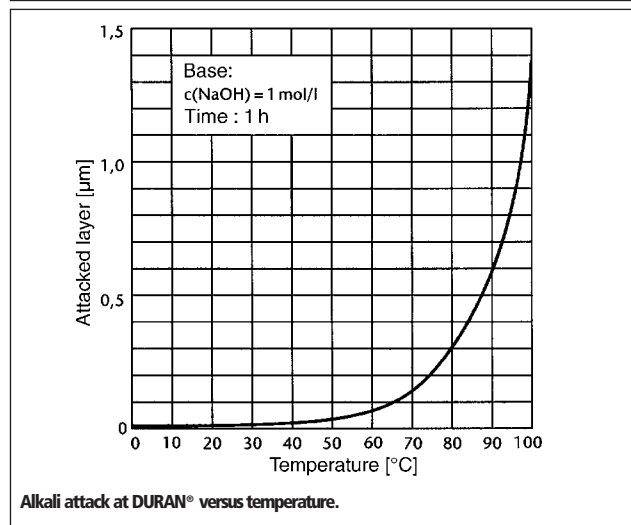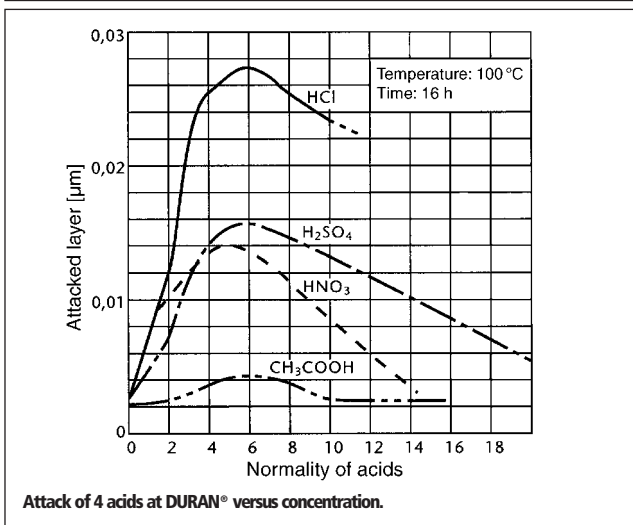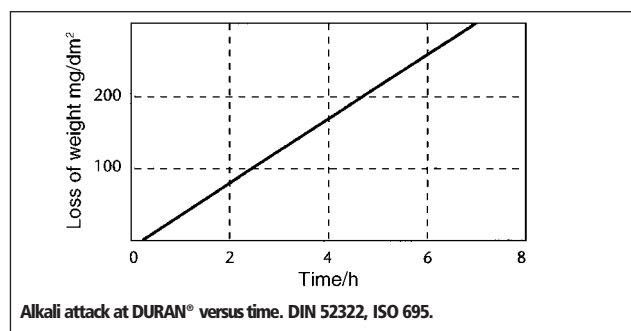

### Alkali Resistance:

DURAN® is classified in alkali resistance class ISO 695-A2.

The test takes place according to DIN 52322, ISO 695 at fire finished DURAN® surfaces, which are boiled in a mixture of a sodium hydroxide solution, 1 mol/L and sodium carbonate solution, 0.5 mol/L, of the same volume. After three hours a weight loss of only 134 mg/dm<sup>2</sup> can be observed at DURAN®. The surface removal through alkali is directly proportional to time. A visible attack on the glass surface takes place only at temperatures above 60°C, at lower temperatures the reaction rates are so low that hardly any reduction of the wall thickness takes place over a period of years. Long-term tests have shown that the use of NaOH having a concentration of 1 mol/L at an operating temperature of 50 °C produces a glass surface removal of 1 mm after 25 years in a continuous flow through a DURAN® glass pipeline.

### Temperature Resistance:

The maximum permissible operating temperature of DURAN® exceeds clearly those of plastics usually used in laboratories. The maximum operating temperature of DURAN® is 500°C. DURAN® starts to „soften“ above 525°C. DURAN® can be heated directly with heating coils or heat-

### Linear Coefficient of Expansion:

The linear coefficient of expansion of DURAN® (20 to 300 °C) is  $3.3 \times 10^{-6}/K$ . That means that for an increase in temperature of 1 K a 1 m long pipeline expands its length only by 3.3 µm. Therefore, the thermal shock resistance of DURAN® (above) is so outstanding. The volume of DURAN® glass ware and volumetric instruments keeps constant even under the influence of extreme temperatures.


### Optical Properties:

DURAN® is transparent and colourless. In spectral ranges from 310 to 2200 nm the absorption is negligibly low.

For work with light sensitive substances the DURAN® surface can be tinted brown with a diffusion colour. This results in a strong absorption in the short wave range. The absorption margin of tinted glass is at about 500 nm.

Photochemical reactions in the UV-range like chlorinations and sulfochlorinations can be carried out well. The chlorine molecule absorbs in the 280 to 400 nm range and thus serves as a carrier for the radiation energy.

## Technical Information about Laboratory Glass DURAN®

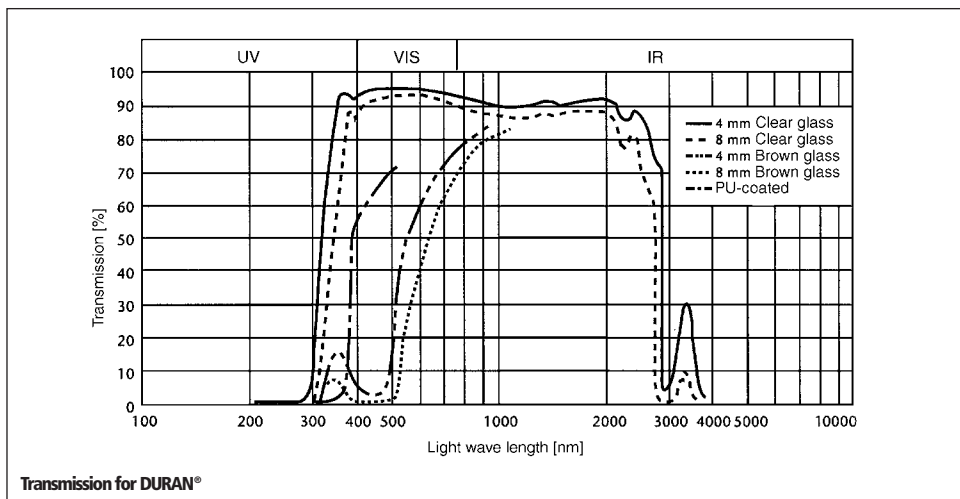

### Cleaning of Laboratory Glass:

Laboratory glass apparatus should be cleaned immediately after use at low temperatures, a short residence time and low alkalinity.

#### 1. Manual Cleaning

Laboratory glass must never be treated with abrasive scouring agents or sponges which would damage the surface. In the dipping bath procedure, laboratory glass is placed into a cleaning solution at room temperature for 20 to 30 minutes, then rinsed with tap water and followed by distilled water.

Lengthen the time and increase the temperature only with persistent impurities. However, this can result in destruction of the print.

#### 2. Machine Cleaning

The machine cleaning of laboratory glass in laboratory dishwashers is a milder treatment than cleaning in a dipping bath, since the glass comes only in contact with cleaning solutions during a relatively short period of time. This conserves glass surfaces and prints. Use the customary cleaning solutions for laboratory dishwashers.

### Disinfection of Laboratory Glass:

Laboratory glass instruments can be disinfected. With manual cleaning use a disinfectant cleaning solution. With machine cleaning use physical thermal processes (10 minutes residence time at 93 °C according to BGA) or chemo-thermal processes. After that laboratory instruments can be autoclaved.

### Autoclaving of Laboratory Glass:

According to DIN 58900, part 1 and DIN 58946, part 1/2, 1987, hot air sterilisation is the „killing resp. irreversible disabling of all augmentable microorganisms“ under the influence of „saturated steam of at least 120°C and 2 bar“. As minimum residence time (time to kill + excess time) are considered  $t_g = 20$  minutes at 121°C.

A raised vapour temperature of 121°C is only possible with a raised pressure of 2 bar. Vessels must only be hot air sterilised with open closures, to avoid additional pressure build-up and resulting breakage.

The hygienic manager is responsible for proper sterilisation and biological safety (DIN 58946, part 3).

### Notes concerning Sterilisation:

- Contaminated laboratory instruments must be cleaned before sterilisation.

Dirt particles bake and enclose microorganisms, so that they are protected by the dirt particles and cannot be effectively killed.

Chemicals embedded in dirt particles can attack the surface because of the high temperatures during the sterilisation process.

- Open closed vessels to avoid pressure build-up.

- Effective sterilisation is only possible with saturated vapour which can reach unhindered any part of the contaminated vessel.

### Disposal:

Contaminated glass has to be disposed of according to waste material key No. 17 01 99 D1, „Wood, Glass and Plastics with Dangerous Contaminations“. DURAN® may not be disposed of in common recycling glass containers, since the high melting point of DURAN® shards leads to considerable problems during the recycling process.

### Safe Handling of DURAN®

#### Important Safety Tips for Users

- Previous to handling DURAN® laboratory glass, it has to be tested for suitability and function.
- Damaged laboratory glass provides a source for danger which must not be underestimated.
- Damaged volumetric instruments of glass must not be repaired, since the risk of breakage increases dramatically.
- Prevent glass instruments from sudden temperature changes.
- Apparatus must always be built up safe and without tensions with appropriate tripods.
- Pressurized or evacuated glass apparatus must never be touched to avoid surface damage.
- To avoid tensions in the glass, never heat up evacuated or pressurized glasswares with a single-sided heat source or open flame.
- Previous to evacuating or pressurizing glass instruments, there has to be a visual check to secure proper conditions.
- Glassware must never be subjected to sudden pressure changes, like sudden venting.

Alphabetical Index

Accessories and Spare Parts for Water Still		with Valve Stopcock	55	Distribution Tubes with Frit for Specific Light Solvents	74	Funnels	66
MonoDest 3000	91	Columns	54	Distributors for Distilling Receivers to Bredt	63	Funnels, Plain	66
Accessories for Conical Ground Joints	13	Columns to Hempel	54	Dropping Funnels	43	Funnels with Cone	66
Accessories for Reaction Vessels	104	Columns to Hempel with Vacuum Jacket	54	Dropping Funnels, Cylindrical	43	Gas Collecting Tubes, Central Ring	116
Adapters	19	Columns to Vigreux	55	Dropping Funnels, Cylindrical, with Pressure Equalizing Tube	43	Gas Distribution Tubes, Lateral Ring	116
Adapters	52	Condensers	56	Dropping Funnels, Conical	44	Gas Inlet Tubes / Air Leak Tubes, Straight	51
Adapters, Bent	52	Condensers with Receiver to Twisselmann	72	Drying Tubes	67	Gas Inlet Tubes with Valve Stopcock	51
Adapters, Bent	53	Cones	10	Drying Tubes (Chlorcalcium Tubes)	67	Gas Washbottle Heads with Filter Disc	80
Adapters for Distilling Receivers to Bredt	63	Cones, Full Length	11	Drying Tubes, U-Shaped	67	Gas Washbottle Heads without Filter Disc	80
Adapters, NS Cone to Spherical Joint Socket	19	Cones, Full Length, with Cone Tip	11	Drying Tubes, U-Shaped	67	Gas Washbottles	80
Adapters, NS Socket to Spherical Joint Ball	19	Cones with Angle Drip	10	Drying Tubes with Cone, Bent	67	Gas Washbottles to Drechsel with Filter Disc	80
Adapters, Straight	52	Cones with Cone Tip	10	Erlenmeyer Flasks, Narrow Neck	110	Gas Washbottles to Drechsel without Filter Disc	80
Adapters, Straight	53	Cones with Cone Tip and Special Tube Dimensions	11	Erlenmeyer Flasks, Wide Neck	110	Gas Washbottles to Drechsel with Screw Connections	81
Adapters with NS Stopcock, Bent	53	Cones with Short Tip	10	Erlenmeyer Flasks with Conical Joint	31	Gas Washbottles to Drechsel without Filter Disc	80
Adapters with NS-Stopcock, Bent	52	Conical Joint Clips Type „Keck“	14	Erlenmeyer Flasks with DIN-Thread	32	Gas Washbottles without Head	81
Adapters with NS-Stopcock, Straight	52	Conical Joint Clips Type „Safety Clip“	14	Evaporating Flasks	33	Gauges to Bennert	86
Air Condensers without Jacket	56	Connectors	66	Extractor Head for Specific Heavier Solvents	75	Glass Beads, Solid	54
Air Leak Tubes	51	Connectors, Bent	66	Extractor Heads for Solids	73	Glass Filtration Instruments	113
Allihn Condensers	57	Connectors with Stopcock	66	Extractor Heads for Specific Light Solvents	74	Glass Inserts with Bores for Solids	73
Allihn Condensers	58	Davies Condensers	57	Extractors	68	Glass Rings, Raschig	54
Alu-Rings with Hooks	13	Delivery Adapters	61	Extractors for Solids	73	Ground Joint Sleeves with Grip Collar, PTFE	13
Analytical Apparatus	82	Delivery Adapters, Bent	61	Extractors for Specific Heavier Solvents	75	Heads for Jacketed Extractors, Knöfler-Böhm	71
Anchor Stirrers	108	Delivery Adapters, Bent	61	Extractors for Specific Light Solvents	74	High efficient Condensers with 4 Coils	60
Ball Members, Inch Range	15	Delivery Adapters, Bent	62	Filter Adapters	114	Hollow Stoppers, Hexagonal Plate, Flat Bottom	18
Beakers	110	Delivery Adapters, Straight	61	Filter Crucibles	113	Hollow Stoppers, Hexagonal Plate, Pointed Bottom	18
Beakers, High Form	110	Dimroth Condensers	59	Filter Funnels	114	Iodine Determination Flasks	32
Beakers, Low Form	110	Dimroth Condensers with Cone	59	Filter Funnels, Conical	115	Jacketed Extractors, Knöfler-Böhm	71
Bends	47	Disposable Ground Joint Sleeves, PTFE	13	Filter Plates	113	Kipp Dispenser Heads	79
Bends	47	Distillation Thermometers	51	Filter Plugs	115	Kipp Dispensers	79
Bubble Counters	83	Distilling Heads	47	Filter Plugs	115	Kjeldahl Flasks	33
Burette Needle-valve Stopcocks	26	Distilling Links	48	Filter Tubes to Allihn	116	KPG Shafts	105
Burette Stopcocks, Lateral	26	Distilling Links	48	Flasks, Multi-neck	34	KPG Stirrer Bearings	105
Burette Stopcocks, Straight	25	Distilling Links, Claisen	50	Flasks, Single-neck	30	KPG Stirrer Guides (Stirrer Bearings)	105
Centrifuge Tubes, ASTM, Cylindrical	88	Distilling Links, Claisen	50	Flasks with Beaded Rim	110	KPG Stirrer Guides (Stirrer Bearings)	105
Centrifuge Tubes, ASTM, Cylindrical	88	Distilling Links for Short Path Distillation	50	Flasks with Beaded Rim	111	KPG Stirrers	107
Centrifuge Tubes, ASTM, Pear-shaped	88	Distilling Links with Liebig Condenser	49	Flat Bottom Flasks	111	KPG Stirrers with Teflon Blades	108
Chromatographic Columns	76	Distilling Links with Liebig Condenser and Vacuum Receiver Adapter	49	Flat Bottom Flasks, Narrow Neck	111	Laboratory Bottles	112
Chromatographic Columns with Frit, Cone and Socket	78	Distilling Links with Splash Head	49	Flat Bottom Flasks, Wide Neck	111	Laboratory Bottles	112
Chromatographic Columns with Frit, PTFE- or Valve Stopcock	77	Distilling Receivers	63	Flat Bottom Flasks with Conical Joint	31	Liebig Condensers	56
Chromatographic Columns with Indentations and PTFE Stopcock	76	Distilling Receivers to Anschütz-Thiele, Bent	65	Flat Flange Lids	102	Melting Point Determination Apparatus to Thiele	83
Claisen Heads	47	Distilling Receivers to Anschütz-Thiele, Straight	64	Flat Flange Lids, Center Neck, One Oblique Side Neck	102	Micro Filter Funnels	114
Clamps	104	Distilling Receivers to Anschütz-Thiele, Straight, with Cooling Jacket	65	Flat Flange Lids, Center Neck, Three Oblique Side Necks and One Vertical Side Neck	103	Multiple Adapters, 2 Necks	46
Clamps for Stand Grids	104	Distilling Receivers to Bernauer	64	Flat Flange Lids, Center Neck, Two Oblique Side Necks	103	Multiple Adapters, 2 Necks	46
Clamps for Stand Rods	104	Distilling Receivers to Bredt, Bent	63	Flat Flange Lids, Center Neck, Two Oblique Side Necks and One Vertical Side Neck	103	Multiple Adapters, 3 Necks	46
Clips	14	Distilling Receivers to Bredt, Bent	63	Fork Clamps for NS	14	Needle-valve Stopcocks	22
Coil Condensers (double walled)	60	Distribution Tubes with Frit for Specific Heavier Solvents	75	Fork Clamps for Spherical Joints	15	Needle-valve Stopcocks for	

Alphabetical Index

Desiccators	27	Round-bottom Flasks		with Female Thread	106	Water Jet Pumps to Friedrichs-Antlinger	87
Needle-valve Stopcocks, Right-angled	23	with Conical Joint	30	Stirrer Guides		Water Jet Pumps to Wetzel	87
Needle-valve Stopcocks, Straight	23	Round-bottom Flasks with Conical Joint, Amber	30	with GL Male Thread	106	Water Still MonoDest 3000 E	90
Nitrogen Round-bottom Flasks (Schlenk-Flasks)	35	Rubber Sleeves	113	Stirrers	106	Water Still MonoDest 3000 N	90
Nitrogen Tubes (Schlenk-Tubes)	35	Screw-caps	112	Stirrers with Paddles	107	Water Stills MonoDest	90
No-return Valves	87	Screw-caps	112	Stirrers with Stirrer Bearing	106	Weighing Bottles with NS Cap	82
O-ring Seals	104	Screw-Caps for Screwthread Tubes	16	Stopcocks, Straight Bore with Hollow Glass Plug	22	Weighing Bottles with NS Stopper	82
Oxygen Determination Bottles to Winkler	86	Screw-Caps with Aperture for Screwthread Tubes	16	Stopcocks, Straight Bore with PTFE Plug	22	Weighing Scoops, Glass	82
Pear-shape Flasks, Single-neck	32	Screwthread Couplings for Screwthread Tubes	17	Stopcocks, Straight Bore with Solid Glass Plug	22		
Pear-shape Flasks, Two-neck	35	Screwthread Tubes for Glassblowers	16	Stopcocks, Three Way, to Czako	25		
Plastic Hose Connections	17	Screwthread Tubes with NS Cone	16	Stopcocks, Three Way with PTFE Plug	24		
Pouring Rings	112	Sedimentation Cones to Imhoff	85	Stopcocks, Three Way with Solid Glass Plug	24		
Pouring Rings	112	Sedimentation Cones to Imhoff	85	Stopcocks, Two Way with PTFE Plug	24		
Powder Flasks	33	Separating Funnels, Conical	40	Stopcocks, Two Way with Solid Glass Plug	24		
PTFE Paddles	107	Separating Funnels, Cylindrical	42	Stoppers	18		
Pycnometer Heads with Wide-Neck Bottle		Separating Funnels, Gilson	42	Stoppers, Octagonal Plate, Glass	18		
with Conical Shoulder	84	Separating Funnels, Squibb	41	Stoppers, Octagonal Plate, Plastic	18		
Pycnometers to Gay-Lussac, adjusted	84	Set Screws for NS Fork Clamps	14	Tabs	27		
Pycnometers to Gay-Lussac, adjusted, with Thermometer and Side Tube	84	Silicone Rubber Sealings with Bore	17	Tabs for Aspirator Bottles	27		
Pycnometers to Gay-Lussac, unadjusted	84	Silicone Rubber Seals, Septa	17	Teflon Blades for KPG Stirrers	108		
Reaction Vessels	94	Small Flanges, KF, with Nozzle	53	Test Tube Sprayers	79		
Reaction Vessels, Cylindrical	94	Small Flanges with Thread, Steel	53	Test Tubes, Conical Bottom with Ground Joint	89		
Reaction Vessels, Cylindrical, with Thermostatic Jacket	96	Socket Members, Inch Range	15	Test Tubes, Round Bottom with NS	89		
Reaction Vessels, Cylindrical, with Thermostatic Jacket and Withdrawal Valve	97	Sockets	12	Test Tubes with Ground Joint	89		
Reaction Vessels, Cylindrical, with Withdrawal Valve	95	Sockets, Full Length	12	Thielepape Extractor Heads	70		
Reaction Vessels, Spherical	98	Sockets with Special Tube Dimensions	12	Thielepape Extractors	70		
Reaction Vessels, Spherical, with Thermostatic Jacket	100	Soxhlet Extractor Heads	69	Tubes with Sintered Glass for Thielepape Extractors	70		
Reaction Vessels, Spherical, with Thermostatic Jacket and Withdrawal Valve	101	Soxhlet Extractor Heads with Flange	69	Tubes with Socket and Cone	12		
Reaction Vessels, Spherical, with Withdrawal Valve	99	Soxhlet Extractor with Flange	69	Tubing Connectors	20		
Receiver Adapters, Bent	62	Soxhlet Extractors	68	Tubing Connectors, straight	20		
Receiver Adapters, Straight	62	Spare Parts for Gas Washbottles with Screw Connections	81	Tubing Connectors, T-shape	20		
Receiving Flasks	33	Spare Parts for KPG Stirrers with Lateral Blade	107	Tubing Connectors, Y-shape	20		
Reduction and Expansion Adapters with Ground Joint	19	Spare Parts for Stirrer Guides	106	Twisselmann Extractor Heads with Vacuum Jacket	72		
Round Bottom Flasks, Narrow Neck	111	Spare Parts for Water Estimators to Dean Stark	83	Twisselmann Extractors	72		
Round Bottom Flasks, Wide Neck	111	Spare Plugs for Stopcocks, Straight Bore	22	Universal Tubing Connectors	20		
Round-bottom Flasks, Four-neck	38	Spherical Joints	15	Vacuum Stopcocks	28		
Round-bottom Flasks, Three-neck, Side Necks Angled	37	Spiral-condensers	58	Vacuum-stopcocks, One Way, Parallel	28		
Round-bottom Flasks, Three-neck, Side Necks Parallel	36	Splash Heads to Stutzer	48	Vacuum-Stopcocks, One Way, Right-angled	28		
		Sprayers	79	Vacuum-stopcocks, One Way, Straight	28		
		Springs	13	Vacuum-Stopcocks, Two Way, Right-angled	28		
		Still Heads	46	Valve Keys for Needle-valve Stopcocks	23		
		Still Heads for Steam Distillation	48	Wash Bottles	79		
		Stirrer Bearings	105	Water Connectors	87		
		Stirrer Guides					
		with Cooling Jacket	105				
		Stirrer Guides					

Number Index

1.1001.05	12	1.1012.05	11	1.3000.45	16	1.4010.24	18	2.1621.06	22	3.0014.28	30	3.0245.70	31	3.2144.79	34	3.3444.70	38
1.1001.07	12	1.1014.11	12	1.3114.14	16	1.4010.29	18	2.1624.08	22	3.0014.37	30	3.0245.73	31	3.2211.22	35	3.3444.73	38
1.1001.10	12	1.1014.14	12	1.3114.19	16	1.4010.34	18	2.1629.10	22	3.0014.49	30	3.0245.76	31	3.2211.28	35	3.3444.76	38
1.1001.12	12	1.1014.22	12	1.3114.24	16	1.4010.45	18	2.1712.01	22	3.0019.22	30	3.0245.82	31	3.2211.37	35	3.3444.79	38
1.1001.14	12	1.1014.44	12	1.3114.29	16	1.5012.14	19	2.1712.02	22	3.0019.28	30	3.0251.37	32	3.2211.49	35	3.3444.85	38
1.1001.19	12	1.1015.14	13	1.3118.14	16	1.5014.12	19	2.1714.02	22	3.0019.37	30	3.0251.49	32	3.2221.22	35	3.3454.70	38
1.1001.24	12	1.1015.19	13	1.3118.19	16	1.5014.19	19	2.1714.04	22	3.0019.49	30	3.0251.58	32	3.2221.28	35	3.3454.73	38
1.1001.29	12	1.1015.24	13	1.3118.24	16	1.5014.24	19	2.1718.04	22	3.0019.58	30	3.0251.70	32	3.2221.37	35	3.3454.76	38
1.1001.34	12	1.1015.29	13	1.3118.29	16	1.5014.29	19	2.1718.06	22	3.0024.28	30	3.0260.37	32	3.2221.49	35	3.3454.79	38
1.1001.40	12	1.1015.45		1.3125.14	16	1.5019.14	19	2.1721.06	22	3.0024.37	30	3.0260.49	32	3.3032.37	36	3.3454.82	38
1.1001.45	12	13, 91		1.3125.19	16	1.5019.24	19	2.1724.08	22	3.0024.49	30	3.0260.52	32	3.3032.49	36	3.3454.85	38
1.1001.50	12	1.1017.14	13	1.3125.24	16	1.5019.29	19	2.1729.10	22	3.0024.58	30	3.0260.58	32	3.3032.58	36	3.3454.88	38
1.1001.55	12	1.1017.19	13	1.3125.29	16	1.5019.34	19	2.2212.01	22	3.0024.70	30	3.0260.70	32	3.3032.70	36	3.3601.22	35
1.1001.60	12	1.1017.24	13	1.3200.14		1.5024.14	19	2.2214.02	22	3.0024.73	30	3.0262.37	32	3.3032.73	36	3.3601.28	35
1.1001.71	12	1.1017.29	13	16, 91		1.5024.19	19	2.2412.01	22	3.0029.28	30	3.0262.49	32	3.3041.37	36	3.3601.37	35
1.1001.85	12	1.1017.45	13	1.3200.18	16	1.5024.29	19	2.2414.02	22	3.0029.37	30	3.0262.58	32	3.3041.49	36	3.3601.49	35
1.1002.05	10	1.1025.14	13	1.3200.25		1.5024.34	19	2.2700.02	23	3.0029.49	30	3.0314.10	32	3.3041.58	36	3.3604.28	35
1.1002.07	10	1.1025.19	13	16, 112		1.5024.45	19	2.2700.04	23	3.0029.58		3.0314.13	32	3.3041.70	36	3.3604.37	35
1.1002.10	10	1.1025.29	13	1.3200.32		1.5029.14	19	2.2700.06	23	30, 83		3.0314.22	32	3.3041.73	36	3.3604.49	35
1.1002.12	10	1.1025.45	13	16, 112		1.5029.19	19	2.2702.02	23	3.0029.70	30	3.0314.28	32	3.3041.76	36	3.3604.58	35
1.1002.14	10	1.1028.25	13	1.3200.45		1.5029.24	19	2.2702.04	23	3.0029.73	30	3.0314.37	32	3.3041.79	36	3.3604.70	35
1.1002.19	10	1.1028.35	13	16, 112		1.5029.34	19	2.2702.06	23	3.0029.76	30	3.0314.49	32	3.3041.85	36	3.3701.13	35
1.1002.24	10	1.1028.40	13	1.3210.14		1.5029.45	19	2.2800.02	23	3.0029.79	30	3.0319.22	32	3.3042.37	36	3.3701.22	35
1.1002.29	10	1.1028.60	13	16, 81		1.5029.60	19	2.2800.04	23	3.0029.82	30	3.0319.28	32	3.3042.49	36	3.3701.28	35
1.1002.34	10	1.1028.70	13	1.3210.18	16	1.5029.71	19	2.2800.06	23	3.0029.85	30	3.0319.37	32	3.3042.58	36	3.3701.37	35
1.1002.40	10	1.1032.14	14	1.3210.25	16	1.5034.19	19	2.4014.01	24	3.0029.88	30	3.0319.49	32	3.3042.70	36	3.3701.49	35
1.1002.45	10	1.1032.19	14	1.3210.32	16	1.5034.24	19	2.4014.02	24	3.0029.94	30	3.0329.28	32	3.3042.73	36	3.3702.13	35
1.1002.50	10	1.1032.24	14	1.3210.45		1.5034.29	19	2.4018.04	24	3.0031.28	30	3.0329.37	32	3.3044.37	36	3.3702.22	35
1.1002.55	10	1.1032.29		16, 81		1.5045.29	19	2.4314.01	24	3.0031.37	30	3.0329.49	32	3.3044.49	36	3.3702.28	35
1.1002.60	10	14, 91		1.3215.14	17	1.5045.34	19	2.4314.02	24	3.0031.49	30	3.0429.28	33	3.3044.58	36	3.3702.37	35
1.1002.71	10	1.1032.45		1.3215.18	17	1.5045.60	19	2.4318.04	24	3.0031.58	30	3.0429.37	33	3.3044.70	36	3.3702.49	35
1.1002.85	10	14, 91		1.3215.25	17	1.5045.71	19	2.4614.01	24	3.0031.70	30	3.0429.49	33	3.3044.73	36	4.0000.28	40
1.1003.07	10	1.1035.14	14	1.3215.32	17	1.5060.29	19	2.4614.02	24	3.0045.49	30	3.0429.58	33	3.3044.76	36	4.0000.37	40
1.1003.10	10	1.1035.19	14	1.3314.06	17	1.5060.45	19	2.4914.01	24	3.0045.58	30	3.0429.70	33	3.3044.79	36	4.0000.49	40
1.1003.12	10	1.1035.24	14	1.3318.06	17	1.5071.29	19	2.4914.02	24	3.0045.70	30	3.0429.73	33	3.3044.82	36	4.0000.58	40
1.1003.14	10	1.1035.29	14	1.3318.08	17	1.5071.45	19	2.5014.01	24	3.0045.73	30	3.0429.76	33	3.3044.85	36	4.0000.70	40
1.1003.19	10	1.1035.45	14	1.3318.10	17	1.5219.14	19	2.5014.02	24	3.0045.76	30	3.0430.37	33	3.3044.88	36	4.0000.73	40
1.1003.24	10	1.1035.99	14	1.3325.08	17	1.5219.29	19	2.5018.02	24	3.0045.79	30	3.0430.49	33	3.3054.70	36	4.0020.28	40
1.1003.29	10	1.1037.10	14	1.3325.10	17	1.5229.29	19	2.5018.04	24	3.0045.82	30	3.0430.58	33	3.3054.73	36	4.0020.37	40
1.1003.34	10	1.1037.12	14	1.3325.12	17	1.5235.29	19	2.5024.04	24	3.0045.85	30	3.0430.70	33	3.3054.76	36	4.0020.49	40
1.1003.40	10	1.1037.14		1.3332.10	17	1.5314.19	19	2.5029.06	24	3.0045.88	30	3.0430.73	33	3.3054.79	36	4.0020.58	40
1.1003.45	10	14, 79		1.3332.12	17	1.5329.29	19	2.5414.01	24	3.0045.94	30	3.0519.28	33	3.3054.82	36	4.0020.70	40
1.1003.50	10	1.1037.18	79	1.3332.14	17	1.5329.35	19	2.5414.02	24	3.0119.28	31	3.0519.37	33	3.3054.85	36	4.0020.73	40
1.1003.55	10	1.1037.19		1.3332.16	17	1.5329.41	19	2.5418.02	24	3.0119.37	31	3.0529.49	33	3.3054.88	36	4.0041.28	40
1.1003.60	10	14, 79		1.3332.18	17	1.6000.08	20	2.5418.04	24	3.0119.49	31	3.0529.58	33	3.3054.94	36	4.0041.37	40
1.1003.71	10	1.1037.24	14	1.3345.26	17	1.6000.09	20	2.5424.04	24	3.0119.58	31	3.0529.64	33	3.3111.28	37	4.0041.49	40
1.1003.85	10	1.1037.29	14	1.3345.32	17	1.6000.10	20	2.5429.06	24	3.0124.28	31	3.0529.70	33	3.3111.37	37	4.0041.58	40
1.1004.14	10	1.1037.34	14	1.3412.14	17	1.6005.08	20	2.6114.01	25	3.0124.37	31	3.0635.37	33	3.3131.37	37	4.0041.70	40
1.1004.19	10	1.1037.40	14	1.3416.18	17	1.6005.10	20	2.6118.04	25	3.0124.49	31	3.0635.49	33	3.3131.49	37	4.0041.73	40
1.1004.24	10	1.1037.45	14	1.3422.25	17	1.6007.08	20	2.6314.01	25	3.0124.58	31	3.0635.58	33	3.3131.58	37	4.0061.28	40
1.1004.29	10	1.1038.10	14	1.3429.32	17	1.6007.10	20	2.6318.04	25	3.0124.70	31	3.0635.70	33	3.3131.70	37	4.0061.37	40
1.1005.14	10	1.1038.12	14	1.3442.45	17	1.6010.00	20	2.7000.01	25	3.0124.73	31	3.0635.73	33	3.3132.37	37	4.0061.49	40
1.1005.19	10	1.1038.14	14	1.3500.00		2.1012.01	22	2.7002.01	25	3.0129.28	31	3.2041.37	34	3.3132.49	37	4.0061.58	40
1.1005.24	10	1.1038.19	14	17, 81		2.1012.02	22	2.7005.01	25	3.0129.37	31	3.2041.49	34	3.3132.58	37	4.0061.70	40
1.1005.29	10	1.1038.24	14	1.3500.01	17	2.1014.02	22	2.7007.01	25	3.0129.49	31	3.2041.58	34	3.3132.70	37	4.0061.73	40
1.1006.05	12	1.1038.29	14	1.3600.00	17	2.1014.04	22	2.7009.02	26	3.0129.58	31	3.2041.70	34	3.3132.73	37	4.0100.28	41
1.1006.07	12	1.1038.34	14	1.3600.01	17	2.1018.04	22	2.7020.01	26	3.0129.70	31	3.2041.73	34	3.3141.37	37	4.0100.37	41
1.1006.10	12	1.1038.40	14	1.4000.07	18	2.1018.06	22	2.7022.01	26	3.0129.73	31	3.2044.49	34	3.3141.49	37	4.0100.49	41
1.1006.12	12	1.1038.45	14	1.4000.10	18	2.1021.06	22	2.7025.01	26	3.0214.13	31	3.2044.58	34	3.3141.58	37	4.0100.58	41
1.1006.14	12	1.2013.02	15	1.4000.12	18	2.1024.08	22	2.7027.01	26	3.0214.22	31	3.2044.70	34	3.3141.70	37	4.0100.70	41
1.1006.19	12	1.2013.05	15	1.4000.14	18	2.1029.10	22	2.7029.02	26	3.0214.28	31	3.2044.73	34	3.3141.73	37	4.0100.73	41
1.1006.24	12	1.2019.09	15	1.4000.19	18	2.1112.01	22	2.8019.04	27	3.0214.37	31	3.2044.79	34	3.3141.76	37	4.0120.28	41
1.1006.29	12	1.2029.15	15	1.4000.24	18	2.1112.02	22	2.8029.06	27	3.0219.22	31	3.2111.22	34	3.3141.79	37	4.0120.37	41
1.1006.34	12	1.2035.20	15	1.4000.29	18	2.1114.02	22	2.8224.04	27	3.0219.28	31	3.2111.28	34	3.3141.85			

Number Index

4.0261.70	42	5.0300.22	47	5.0970.02	52	5.2103.04	56	5.2502.01	60	5.3180.09	66	5.4201.06	72	5.4761.13	79	5.5690.06	82
4.0300.28	42	5.0300.32	47	5.0970.03	52	5.2104.G1	56	5.2502.04	60	5.3180.12	66	5.4310.31	73	5.4761.19	79	5.5690.10	82
4.0300.37	42	5.0300.33	47	5.0970.04	52	5.2104.G2	56	5.2503.G3	60	5.3180.15	66	5.4310.37	73	5.4761.22	79	5.5800.03	87
4.0300.49	42	5.0300.41	47	5.0980.01	52	5.2104.G3	56	5.2503.G4	60	5.3180.17	66	5.4310.49	73	5.4761.28	79	5.5850.00	87
4.0300.58	42	5.0300.44	47	5.0980.02	52	5.2104.G4	56	5.2503.03	60	5.3180.20	66	5.4311.31	73	5.4761.37	79	5.5852.00	87
4.0300.70	42	5.0330.32	48	5.0980.03	52	5.2104.01	56	5.2503.04	60	5.3180.25	66	5.4311.37	73	5.4850.00	83	5.5860.00	87
4.0300.73	42	5.0330.44	48	5.0980.04	52	5.2104.02	56	5.2504.G4	60	5.3180.33	66	5.4311.49	73	5.4850.01	83	5.5861.00	87
4.0301.28	42	5.0350.11	48	5.1010.01	53	5.2104.03	56	5.2504.04	60	5.3210.01	66	5.4312.01	73	5.5005.G1	80	5.5900.00	87
4.0301.37	42	5.0350.32	48	5.1010.02	53	5.2104.04	56	5.2505.G4	60	5.3210.02	66	5.4312.02	73	5.5005.G2	80	5.6000.00	83
4.0301.49	42	5.0350.44	48	5.1010.03	53	56, 83		5.2505.04	60	5.3210.03	66	5.4312.03	73	5.5005.G3	80	5.6000.02	83
4.0301.58	42	5.0370.11	48	5.1010.04	53	5.2105.G4	56	5.2550.00	60	5.3210.04	66	5.4320.37	74	5.5005.G4	80	5.6000.04	83
4.0301.70	42	5.0370.22	48	5.1030.01	53	5.2105.04	56	5.2550.50	60	5.3300.10	67	5.4320.49	74	5.5005.37	80	5.6003.01	83
4.0301.73	42	5.0370.32	48	5.1030.02	53	5.2107.G4	56	5.2600.01	61	5.3300.13	67	5.4320.58	74	5.5005.49	80	5.6003.03	83
4.1522.11	43	5.0370.33	48	5.1030.03	53	5.2107.04	56	5.2600.02	61	5.3330.10	67	5.4321.37	74	5.5005.58	80	5.6003.05	83
4.1528.11	43	5.0370.44	48	5.1030.04	53	5.2153.G3	57	5.2600.03	61	5.3330.13	67	5.4321.49	74	5.5005.70	80	5.6050.37	86
4.1528.14	43	5.0400.01	48	5.1050.01	53	5.2153.G4	57	5.2600.04	61	5.3370.01	67	5.4321.58	74	5.5006.G0	80	5.6050.49	86
4.1537.11	43	5.0400.02	48	5.1050.02	53	5.2153.03	57	5.2630.01	61	5.3370.02	67	5.4322.02	74	5.5006.00	80	5.6055.00	86
4.1537.14	43	5.0400.03	48	5.1050.03	53	5.2153.04	57	5.2630.02	61	5.3370.03	67	5.4322.03	74	5.5100.G1	80	5.6055.01	86
4.1549.14	43	5.0400.04	48	5.1050.04	53	5.2154.G3	57	5.2630.03	61	5.3370.04	67	5.4322.04	74	5.5100.G2	80	5.6300.10	84
4.1558.14	43	5.0430.01	49	5.1061.10	53	5.2154.G4	57	5.2630.04	61	5.3390.10	67	5.4330.37	75	5.5100.G3	80	5.6300.13	84
4.1570.14	43	5.0430.02	49	5.1061.16	53	5.2154.03	57	5.2650.01	61	5.3390.13	67	5.4330.49	75	5.5100.G4	80	5.6300.22	84
4.1722.11	43	5.0430.03	49	5.1062.16	53	5.2154.04	57	5.2650.02	61	5.3390.18	67	5.4330.58	75	5.5100.37	80	5.6300.28	84
4.1728.11	43	5.0430.04	49	5.1071.10	53	5.2232.G1	57	5.2650.03	61	5.3420.13	67	5.4331.37	75	5.5100.49	80	5.6300.37	84
4.1728.14	43	5.0470.01	48	5.1071.16	53	5.2232.G2	57	5.2650.04	61	5.3420.15	67	5.4331.49	75	5.5100.58	80	5.6302.10	84
4.1737.11	43	5.0470.02	48	5.1072.16	53	5.2232.G3	57	5.2660.01	61	5.3550.46	67	5.4331.58	75	5.5100.70	80	5.6302.13	84
4.1737.14	43	5.0470.03	48	5.1081.10	53	5.2232.G4	57	5.2660.02	61	5.3550.58	67	5.4332.02	75	5.5101.G1	80	5.6302.22	84
4.1749.14	43	5.0470.04	48	5.1082.16	53	5.2232.01	57	5.2660.03	61	5.3550.70	67	5.4332.03	75	5.5101.G2	80	5.6302.28	84
4.1758.14	43	5.0502.G1	49	5.1152.01	54	5.2232.02	57	5.2660.04	61	5.3555.46	67	5.4332.04	75	5.5101.G3	80	5.6302.37	84
4.1770.14	43	5.0502.01	49	5.1153.01	54	5.2232.03	57	5.2680.01	62	5.3555.58	67	5.4357.01	76	5.5101.G4	80	5.6400.13	84
4.3522.11	43	5.0503.G1	49	5.1153.03	54	5.2232.04	57	5.2680.02	62	5.3555.70	67	5.4357.02	76	5.5101.37	80	5.6400.22	84
4.3528.11	43	5.0503.G4	49	5.1153.04	54	5.2233.G1	57	5.2680.03	62	5.3600.25	68	5.4357.04	76	5.5101.49	80	5.6400.28	84
4.3528.14	43	5.0503.01	49	5.1155.03	54	5.2233.G2	57	5.2680.04	62	5.3600.31	68	5.4357.06	76	5.5101.58	80	5.6400.37	84
4.3537.11	43	5.0503.04	49	5.1155.04	54	5.2233.G3	57	5.2720.G1	62	5.3600.37	68	5.4357.08	76	5.5101.70	80	5.6600.06	84
4.3537.14	43	5.0504.G4	49	5.1158.03	54	5.2233.G4	57	5.2720.G2	62	5.3600.43	68	5.4407.01	76	5.5102.G1	80	5.6600.07	84
4.3549.14	43	5.0504.04	49	5.1158.04	54	5.2233.01	57	5.2720.G3	62	5.3600.46	68	5.4407.02	76	5.5102.G2	80	5.6602.06	84
4.3558.14	43	5.0532.G1	49	5.1172.01	54	5.2233.02	57	5.2720.G4	62	5.3600.49	68	5.4407.04	76	5.5102.G3	80	5.6602.07	84
4.3570.14	43	5.0532.01	49	5.1173.01	54	5.2233.03	57	5.2720.01	62	5.3600.52	68	5.4407.06	76	5.5102.G4	80	5.6700.01	85
4.3722.11	43	5.0533.G1	49	5.1173.04	54	5.2233.04	57	5.2720.02	62	5.3600.58	68	5.4407.08	76	5.5102.37	80	5.6700.03	85
4.3728.11	43	5.0533.G4	49	5.1175.04	54	5.2234.G3	57	5.2720.03	62	5.3600.70	68	5.4457.01	77	5.5102.49	80	5.6700.05	85
4.3728.14	43	5.0533.01	49	5.1178.04	54	5.2234.G4	57	5.2720.04	62	5.3650.25	68	5.4457.02	77	5.5102.58	80	5.6750.00	88
4.3737.11	43	5.0533.04	49	5.1192.01	54	5.2234.03	57	5.2750.G1	62	5.3650.31	68	5.4457.04	77	5.5102.70	80	5.6750.03	88
4.3737.14	43	5.0534.G1	49	5.1193.04	54	5.2234.04	57	5.2750.G2	62	5.3650.37	68	5.4457.06	77	5.5104.G0	80	5.6750.05	88
4.3749.14	43	5.0534.04	49	5.1195.04	54	5.2235.G4	57	5.2750.G3	62	5.3650.43	68	5.4457.08	77	5.5104.G1	80	5.6800.43	86
4.3758.14	43	5.0552.G1	50	5.1198.04	54	5.2235.04	57	5.2750.G4	62	5.3650.46	68	5.4507.00	77	5.5104.G2	80	5.6800.52	86
4.3770.14	43	5.0552.01	50	5.1240.02	54	5.2260.G4	58	5.2750.01	62	5.3650.49	68	5.4507.01	77	5.5104.00	80	5.6800.58	86
4.4528.02	44	5.0553.G1	50	5.1240.03	54	5.2260.G5	58	5.2750.02	62	5.3670.73	69	5.4507.02	77	5.5104.01	80	5.6800.70	86
4.4537.02	44	5.0553.G4	50	5.1240.04	54	5.2260.G6	58	5.2750.03	62	5.3672.01	69	5.4507.03	77	5.5104.02	80	5.6814.43	86
4.4549.04	44	5.0553.01	50	5.1240.05	54	5.2260.04	58	5.2750.04	62	5.3700.25	70	5.4507.04	77	5.5150.37	81	5.6814.52	86
4.4558.04	44	5.0553.04	50	5.1240.06	54	5.2260.05	58	5.2800.01	63	5.3700.43	70	5.4507.06	77	5.5150.49	81	5.6814.58	86
4.4570.04	44	5.0554.G4	50	5.1240.08	54	5.2260.06	58	5.2800.04	63	5.3700.49	70	5.4508.00	77	5.5150.58	81	5.6814.70	86
4.4573.04	44	5.0554.04	50	5.1270.03	54	5.2332.G1	58	5.2850.01	63	5.3750.25	71	5.4508.01	77	5.5150.70	81	5.7000.07	89
4.4728.02	44	5.0572.G1	50	5.1270.04	54	5.2332.01	58	5.2850.04	63	5.3750.43	71	5.4508.02	77	5.5300.58	81	5.7000.10	89
4.4737.02	44	5.0572.01	50	5.1270.05	54	5.2333.G4	58	5.2850.05	63	5.3750.49	71	5.4508.03	77	5.5301.58	81	5.7000.14	89
4.4749.04	44	5.0573.G1	50	5.1270.06	54	5.2333.04	58	5.2851.01	63	5.3750.58	71	5.4508.04	77	5.5303.00	81	5.7000.26	89
4.4758.04	44	5.0573.G4	50	5.1270.08	54	5.2334.G4	58	5.2851.04	63	5.3800.25	72	5.4508.06	77	5.5303.01	81	5.7000.30	89
4.4770.04	44	5.0573.01	50	5.1270.10	54	5.2334.04	58	5.2851.06	63	5.3800.31	72	5.4509.01	78	5.5303.05	81	5.7000.34	89
4.4773.04	44	5.0573.04	50	5.1302.01	55	5.2335.G4	58	5.2851.08	63	5.3800.37	72	5.4509.02	78	5.5500.00	83	5.7000.38	89
5.0001.11	46	5.0574.G4	50	5.1303.01	55	5.2335.04	58	5.2852.02	63	5.3800.43	72	5.4509.04	78	5.5600.02	82	5.7000.42	89
5.0002.22	46	5.0574.04	50	5.1303.03	55	5.2402.G1	59	5.2852.04	63	5.3951.25	69	5.4509.06	78	5.5600.05	82	5.7001.07	89
5.0004.14	46	5.0580.01	50	5.1303.04	55	5.2402.G2	59	5.2880.01	64	5.3951.31	69	5.4509.11	78	5.5600.08	82	5.7001.10	89
5.0004.44	46	5.0650.01	51	5.1305.03	55	5.2402.01	59	5.2880.02	64	5.3951.37	69	5.4509.12	78	5.5600.12	82	5.7001.14	89
5.0051.11	46	5.0650.02	51	5.1305.04	55	5.2402.02	59	5.2880.04	64	5.3951.43	69	5.4509.14	78	5.5600.15	82	5.7001.26	89
5.0054.44	46	5.0650.03	51	5.1332.01	55	5.2403.G1	59	5.2881.01	64	5.3951.46	69	5.4509.16	78	5.5600.19	82	5.7001.30	89
5.0100.11	46	5.0650.04	51	5.1333.01	55	5.2403.G2	59	5.2881.02	64	5.3951.49	69	5.					

Number Index

5.9006.00 91	6.0074.94 95	6.0304.88 97	6.2465.10 104	6.3152.05 108	7.0350.73 111	7.1854.30 113
5.9006.01 91	6.0075.85 95	6.0311.37 97	6.2465.15 104	6.3152.07 108	7.0350.76 111	7.1854.40 113
5.9006.03 91	6.0075.88 95	6.0311.49 97	6.2470.10 104	6.3152.08 108	7.0350.79 111	7.1870.26 113
5.9007.00 91	6.0075.94 95	6.0311.58 97	6.2470.15 104	6.3152.11 108	7.0350.82 111	7.1870.33 113
5.9007.01 91	6.0081.49 99	6.0311.70 97	6.2470.20 104	6.3152.15 108	7.0350.84 111	7.1870.41 113
5.9007.03 91	6.0081.58 99	6.0312.49 97	6.2480.06 104	6.3206.28 108	7.0350.85 111	7.1870.49 113
5.9008.01 91	6.0081.70 99	6.0312.58 97	6.2480.10 104	6.3206.37 108	7.0350.88 111	7.1890.27 114
5.9008.03 91	6.0082.73 99	6.0312.70 97	6.2480.15 104	6.3206.49 108	7.0350.94 111	7.1890.34 114
5.9008.05 91	6.0082.79 99	6.0312.73 97	6.2480.20 104	6.3206.58 108	7.0450.28 111	7.1890.41 114
5.9008.06 91	6.0082.85 99	6.0312.76 97	6.2482.06 104	6.3206.70 108	7.0450.37 111	7.1890.50 114
5.9010.30 91	6.0082.88 99	6.0312.79 97	6.2482.10 104	6.3210.49 108	7.0450.49 111	7.1900.10 114
5.9010.40 91	6.0082.94 99	6.0314.73 97	6.2482.15 104	6.3210.58 108	7.0450.58 111	7.1901.10 114
5.9015.00 91	6.0084.85 99	6.0314.76 97	6.2482.20 104	6.3210.70 108	7.0450.70 111	7.1902.10 114
5.9015.02 91	6.0084.88 99	6.0314.79 97	6.3000.10 105	6.3210.73 108	7.0450.73 111	7.1903.10 114
5.9020.00 91	6.0084.94 99	6.0314.82 97	6.3001.10 105	6.3210.76 108	7.0450.76 111	7.1904.10 114
6.0001.28 94	6.0085.85 99	6.0314.85 97	6.3001.16 105	6.3210.79 108	7.0450.79 111	7.1951.28 114
6.0001.37 94	6.0085.88 99	6.0314.88 97	6.3005.10 105	6.3210.85 108	7.0450.82 111	7.1951.34 114
6.0001.49 94	6.0085.94 99	6.0314.94 97	6.3005.16 105	6.3210.88 108	7.0450.85 111	7.1951.40 114
6.0001.58 94	6.0101.37 96	6.0315.85 97	6.3010.24 105	6.3210.94 108	7.0450.88 111	7.1951.58 114
6.0001.70 94	6.0101.49 96	6.0315.88 97	6.3010.29 105	6.3215.73 108	7.0500.28 111	7.1951.70 114
6.0002.49 94	6.0101.58 96	6.0315.94 97	6.3016.29 105	6.3215.76 108	7.0500.37 111	7.1951.79 114
6.0002.58 94	6.0101.70 96	6.0401.49 101	6.3016.45 105	6.3215.79 108	7.0500.49 111	7.1952.28 114
6.0002.70 94	6.0102.49 96	6.0401.58 101	6.3020.29 105	6.3215.88 108	7.0500.58 111	7.1952.34 114
6.0002.73 94	6.0102.58 96	6.0401.70 101	6.3020.45 105	6.3215.94 108	7.0500.70 111	7.1952.40 114
6.0002.76 94	6.0102.70 96	6.0402.73 101	6.3025.29 105	7.0010.10 110	7.0500.73 111	7.1952.58 114
6.0002.79 94	6.0102.73 96	6.0402.79 101	6.3025.45 105	7.0010.13 110	7.0500.74 111	7.1952.70 114
6.0004.73 94	6.0102.76 96	6.0402.85 101	6.3030.29 106	7.0010.22 110	7.1000.58 81	7.1952.79 114
6.0004.76 94	6.0102.79 96	6.0404.85 101	6.3030.45 106	7.0010.28 110	7.1050.22 112	7.1953.28 114
6.0004.79 94	6.0104.73 96	6.0411.49 101	6.3036.45 106	7.0010.37 110	7.1050.28 112	7.1953.34 114
6.0004.82 94	6.0104.76 96	6.0411.58 101	6.3040.01 106	7.0010.43 110	7.1050.37 112	7.1953.40 114
6.0004.85 94	6.0104.79 96	6.0411.70 101	6.3040.03 106	7.0010.49 110	7.1050.49 112	7.1953.58 114
6.0004.88 94	6.0104.82 96	6.0412.73 101	6.3040.05 106	7.0010.55 110	7.1050.58 112	7.1953.70 114
6.0004.94 94	6.0104.85 96	6.0412.79 101	6.3041.01 106	7.0010.61 110	7.1050.70 112	7.1953.79 114
6.0005.88 94	6.0104.88 96	6.0412.85 101	6.3041.03 106	7.0010.67 110	7.1050.73 112	7.1954.28 114
6.0005.94 94	6.0104.94 96	6.0414.85 101	6.3043.01 106	7.0010.70 110	7.1050.82 112	7.1954.34 114
6.0011.28 94	6.0111.37 96	6.0414.88 101	6.3043.03 106	7.0010.73 110	7.1050.88 112	7.1954.40 114
6.0011.37 94	6.0111.49 96	6.0414.94 101	6.3044.25 106	7.0010.76 110	7.1050.91 112	7.1954.79 114
6.0011.49 94	6.0111.58 96	6.0415.85 101	6.3044.32 106	7.0010.82 110	7.1050.94 112	7.2003.25 115
6.0011.58 94	6.0111.70 96	6.0415.88 101	6.3050.29 106	7.0010.88 110	7.1051.00 112	7.2004.25 115
6.0011.70 94	6.0112.49 96	6.0415.94 101	6.3050.45 106	7.0040.28 110	7.1052.00 112	7.2050.20 115
6.0012.49 94	6.0112.58 96	6.1001.01 102	6.3070.01 107	7.0040.37 110	7.1053.00 112	7.2051.20 115
6.0012.58 94	6.0112.70 96	6.1001.04 102	6.3070.03 107	7.0040.43 110	7.1054.00 112	7.2052.20 115
6.0012.70 94	6.0112.73 96	6.1002.01 102	6.3070.05 107	7.0040.49 110	7.1054.01 112	7.2053.20 115
6.0012.73 94	6.0112.76 96	6.1002.04 102	6.3070.07 107	7.0040.55 110	7.1056.00 112	7.2054.20 115
6.0012.76 94	6.0112.79 96	6.1002.06 102	6.3070.08 107	7.0040.61 110	7.1056.01 112	7.2060.25 115
6.0012.79 94	6.0114.73 96	6.1004.04 102	6.3070.10 107	7.0040.67 110	7.1800.10 113	7.2061.25 115
6.0014.73 94	6.0114.76 96	6.1004.06 102	6.3070.11 107	7.0040.70 110	7.1800.20 113	7.2062.25 115
6.0014.76 94	6.0114.79 96	6.1005.04 102	6.3070.13 107	7.0040.73 110	7.1800.30 113	7.2063.25 115
6.0014.79 94	6.0114.82 96	6.1005.06 102	6.3070.15 107	7.0040.76 110	7.1800.40 113	7.2064.25 115
6.0014.82 94	6.0114.85 96	6.1021.11 102	6.3072.01 107	7.0200.22 110	7.1800.50 113	7.2080.20 115
6.0014.85 94	6.0114.88 96	6.1021.41 102	6.3072.05 107	7.0200.28 110	7.1800.60 113	7.2081.20 115
6.0014.88 94	6.0114.94 96	6.1022.14 102	6.3072.08 107	7.0200.37 110	7.1801.10 113	7.2082.20 115
6.0014.94 94	6.0115.79 96	6.1022.44 102	6.3072.10 107	7.0200.46 110	7.1801.20 113	7.2083.20 115
6.0015.85 94	6.0115.88 96	6.1022.64 102	6.3072.11 107	7.0200.49 110	7.1801.30 113	7.2084.20 115
6.0015.88 94	6.0115.94 96	6.1024.44 102	6.3072.13 107	7.0200.52 110	7.1801.40 113	7.2090.25 115
6.0015.94 94	6.0201.49 100	6.1024.64 102	6.3072.15 107	7.0200.58 110	7.1801.50 113	7.2091.25 115
6.0051.49 98	6.0201.58 100	6.1025.44 102	6.3073.01 107	7.0200.70 110	7.1801.60 113	7.2092.25 115
6.0051.58 98	6.0201.70 100	6.1025.64 102	6.3073.03 107	7.0200.73 110	7.1802.10 113	7.2093.25 115
6.0051.70 98	6.0202.73 100	6.1031.11 103	6.3073.05 107	7.0200.76 110	7.1802.20 113	7.2094.25 115
6.0052.70 98	6.0202.79 100	6.1031.41 103	6.3073.10 107	7.0200.82 110	7.1802.30 113	7.2110.25 116
6.0052.73 98	6.0202.85 100	6.1032.41 103	6.3073.11 107	7.0250.22 110	7.1802.40 113	7.2111.25 116
6.0052.79 98	6.0204.85 100	6.1032.44 103	6.3074.00 107	7.0250.28 110	7.1802.50 113	7.2112.25 116
6.0052.85 98	6.0204.88 100	6.1032.64 103	6.3080.01 107	7.0250.37 110	7.1802.60 113	7.2120.25 116
6.0052.88 98	6.0204.94 100	6.1034.44 103	6.3080.03 107	7.0250.46 110	7.1803.10 113	7.2121.25 116
6.0052.94 98	6.0211.49 100	6.1034.64 103	6.3080.05 107	7.0250.49 110	7.1803.20 113	7.2122.25 116
6.0054.85 98	6.0211.58 100	6.1035.44 103	6.3080.07 107	7.0250.52 110	7.1803.30 113	7.2200.01 116
6.0054.88 98	6.0211.70 100	6.1035.64 103	6.3080.09 107	7.0250.58 110	7.1803.40 113	7.2200.02 116
6.0054.94 98	6.0212.73 100	6.1041.11 103	6.3080.10 107	7.0250.70 110	7.1803.50 113	7.2200.03 116
6.0055.85 98	6.0212.79 100	6.1041.41 103	6.3080.12 107	7.0250.73 110	7.1803.60 113	7.2200.04 116
6.0055.88 98	6.0212.85 100	6.1042.41 103	6.3081.01 107	7.0300.28 111	7.1804.10 113	
6.0055.94 98	6.0215.85 100	6.1042.44 103	6.3081.03 107	7.0300.37 111	7.1804.20 113	
6.0071.28 95	6.0215.88 100	6.1042.64 103	6.3081.05 107	7.0300.49 111	7.1804.30 113	
6.0071.37 95	6.0215.94 100	6.1044.44 103	6.3100.00 106	7.0300.58 111	7.1804.40 113	
6.0071.49 95	6.0301.37 97	6.1044.64 103	6.3105.01 106	7.0300.70 111	7.1804.50 113	
6.0071.58 95	6.0301.49 97	6.1045.44 103	6.3105.02 106	7.0300.73 111	7.1804.60 113	
6.0071.70 95	6.0301.58 97	6.1045.64 103	6.3105.03 106	7.0300.76 111	7.1851.23 113	
6.0072.49 95	6.0301.70 97	6.1052.41 103	6.3105.04 106	7.0300.79 111	7.1851.30 113	
6.0072.58 95	6.0302.49 97	6.1052.44 103	6.3105.05 106	7.0300.82 111	7.1851.40 113	
6.0072.70 95	6.0302.58 97	6.1052.64 103	6.3105.06 106	7.0300.85 111	7.1852.20 113	
6.0072.73 95	6.0302.70 97	6.1054.44 103	6.3105.07 106	7.0300.88 111	7.1852.23 113	
6.0072.76 95	6.0302.73 97	6.1054.64 103	6.3150.01 108	7.0300.94 111	7.1852.30 113	
6.0072.79 95	6.0302.76 97	6.1055.44 103	6.3150.03 108	7.0350.28 111	7.1852.40 113	
6.0074.73 95	6.0302.79 97	6.1055.64 103	6.3150.05 108	7.0350.37 111	7.1853.20 113	
6.0074.76 95	6.0304.73 97	6.2460.06 104	6.3150.07 108	7.0350.49 111	7.1853.23 113	
6.0074.79 95	6.0304.76 97	6.2460.10 104	6.3150.08 108	7.0350.58 111	7.1853.30 113	
6.0074.82 95	6.0304.79 97	6.2460.15 104	6.3150.11 108	7.0350.70 111	7.1853.40 113	
6.0074.85 95	6.0304.82 97	6.2460.20 104	6.3150.15 108	7.0350.71 111	7.1854.20 113	
6.0074.88 95	6.0304.85 97	6.2465.06 104	6.3152.01 108	7.0350.72 111	7.1854.23 113	





# CONDICIONES GENERALES DE VENTA

## PRECIOS ACTUALIZADOS

Le recordamos que en nuestra web [www.hanssell.eu](http://www.hanssell.eu) usted puede consultar en tiempo real, nuestros precios actualizados y las novedades de nuestros productos en cualquier momento los 365 días del año. Los catálogos en papel que ustedes tienen en su poder, pasado 1 año sus precios quedan invalidados.

## PEDIDOS MINIMOS

Todos los pedidos son bienvenidos, no existe pedido mínimo. Para pedidos menores a 80 € + IVA se cargará en la factura un coste adicional de 3 euros en concepto de gastos gestión.

## DESCUENTOS COMERCIALES

Aplicaremos un:

Dto. del 3% a todos los pedidos con un importe superior a **400 € + IVA**.

Dto. del 5% a todos los pedidos con un importe superior a **600 € + IVA**.

Dto. del 7% a todos los pedidos con un importe superior a **1000 € + IVA**,

a excepción de los siguientes artículos: MOBILIARIO DE LABORATORIO y piezas especiales fuera de catálogo.

## PRECIOS SIN IVA (21%)

Los precios indicados en los catálogos **NO** incluyen IVA / IGIC / APIC legalmente vigente. Impuesto sobre el etanol, es uno de los impuestos especiales, junto con el IVA. Este impuesto está regulado por la Ley de Impuestos Especiales, según la normativa fiscal (Ley relativa al impuesto especial sobre alcohol y bebidas derivadas). Tiene unas tasas aparte del IVA dependiendo del grado, consultar tasas.

## PLAZOS DE ENTREGA

Por lo general entregamos nuestros artículos en un plazo de 5 a 7 días laborables en cualquier punto de la península, a excepción de ciertos artículos que informamos en el catálogo del plazo de entrega aproximado. La fecha de entrega de los productos químicos será entre 7/30 días dependiendo de cada fabricante.

## CONDICIONES DE TRANSPORTE

Transporte **INCLUIDO (España Peninsular)** en pedidos superiores a **250 € + IVA**, para pedidos inferiores, se cargaran en factura **12 € + IVA** de portes. Los portes a Canarias, Ceuta y Melilla no están incluidos en los precios (consultar).

## FORMAS DE PAGO

Los pagos por parte de la administración los efectuarán dentro de los 30 días posteriores a la fecha de emisión de la factura, excepto si se han acordado otros términos. La forma de pago será mediante transferencia bancaria, o talón nominativo. Los pagos por parte de particulares o empresas serán mediante transferencia bancaria adelantada.

## DEVOLUCIONES Y RECLAMACIONES

No se acepta ninguna devolución sin la correspondiente conformidad de nuestro departamento de ventas el cual les transmitirá las oportunas instrucciones. Devoluciones por la equivocación por parte del cliente. (Estos son los artículos que no se acepta ninguna devolución: todo el material de vidrio, piezas especiales, artículos esterilizados, material de encargo, todos los productos químicos y mobiliario etc...). Cualquier devolución por la equivocación por parte del cliente deberá ser enviada debidamente embalada a portes pagados (si tuviéramos que recoger la mercancía por nuestra empresa de transportes se les cobraría aparte en factura por la recogida 12 € más otros 12 € por el nuevo envío) se dirigirá los envíos a nuestra empresa acompañada de una copia de nuestro albarán de entrega o factura, sin la cual no se admitirá la devolución.

## GARANTIA

En los aparatos que se incluyen en este catalogo, se indica el plazo de la garantía de cada uno de ellos, en la garantía entra la mano de obra y sustitución

de los componentes por un mal funcionamiento del mismo, no entran los componentes deteriorados por desgaste de los mismos por un mal uso del aparato, en cualquiera de los casos los aparatos en garantía deberán enviarse debidamente embalados a portes pagados por el cliente y dirigidos a nuestra empresa.

## RESPONSABILIDAD

Por parte de esta empresa se ha puesto el máximo empeño para que las fotografías, dibujos y textos que describen a nuestros artículos y que aparecen en este catalogo, definan con exactitud al producto real, sin embargo toda la información tanto fotografías, dibujos y textos, se considera aproximada, no constituyendo un contrato escrito entre nuestra empresa y los compradores, en el caso de discrepancia entre la información del catalogo y el producto real, la responsabilidad de nuestra empresa queda limitada a aceptar la devolución del producto. Los productos contenidos en nuestros catálogos son comercializados para uso exclusivo para profesionales y técnicos de laboratorio debidamente formados, nuestra empresa no se responsabiliza por el uso inadecuado de los mismos o por parte de personal no preparado.

## FACTURAR POR FACe

Para que nosotros podamos tramitar las facturas de sus pedidos en el (Punto General de Entrada de Facturas de la Administración General del Estado (FACe)). Nos tienen que facilitar los datos que solicitan de ustedes dicha administración.

CÓDIGOS DIR3: (CÓDIGOS DE INSERCIÓN OBLIGATORIA)

DATOS A INCLUIR EN LA FACTURA-E	
DATOS DEL TITULAR	
RAZÓN SOCIAL	
CIF TITULAR	
TELÉFONO	
CORREO ELECTRÓNICO	
DATOS DE LA OFICINA CONTABLE	
CÓDIGO	
DESCRIPCIÓN	
DATOS DEL ÓRGANO GESTOR	
CÓDIGO	
DESCRIPCIÓN	
DATOS DE LA UNIDAD TRAMITADORA	
CÓDIGO	
DESCRIPCIÓN	
DATOS DEL ORGANISMO PROPONENTE	
CÓDIGO	
DESCRIPCIÓN	

Por favor envíenos los datos que necesitamos al siguiente E-mail: [jmadhanssell@gmail.com](mailto:jmadhanssell@gmail.com)

## ATENCION AL CLIENTE

Asistencia post-venta para cualquier duda que tenga o cualquier información que necesite.

**Nuevo E-mail:** [jmadhanssell@gmail.com](mailto:jmadhanssell@gmail.com)

**TEL.:** 91 876 73 43

**Móvil:** 639 76 71 54

## VACACIONES DE VERANO

Nuestras instalaciones permanecerán cerradas por vacaciones de verano desde el día 1 de Agosto hasta el 1 de Septiembre.

LOS PRODUCTOS DE ALDO S.L.U. **no trabaja con distribuidores locales**, solamente pueden adquirir nuestros artículos de las siguientes formas: Haciéndonos los pedidos por la web: [www.hanssell.eu](http://www.hanssell.eu)  
Haciéndonos los pedidos por E-mail: [jmadhanssell@gmail.com](mailto:jmadhanssell@gmail.com)  
Haciéndonos los pedidos por Fax: **91 039 01 86**